

MULTILIN 350

Intuitive and Innovative Feeder Protection

The Multilin™ 350 is a member of the Multilin 3 Series protective relay platform and has been designed for the protection, control and management of feeders or related applications as a primary or backup protection device. This cost-effective protective device is used to perform advanced feeder protection, control and monitoring in a drawout or non-drawout design for low, medium and high voltage applications. The 350 also offers enhanced features such as metering, monitoring and diagnostics, preventative maintenance, advanced communications and security.

Key Benefits

- Cost-effective and flexible protection and control for utility and industrial applications
- Field-proven algorithms and reliable protection to avoid unwanted trips or under-protection
- Ease of use and standardization with one-step setup and universal CT inputs
- Environmental monitoring system to monitor operating conditions and plan preventative maintenance
- Advanced power system and switchgear diagnostics
- Flexible communications with multiple ports and protocols allowing seamless integration
- Integrated arc flash detection using light sensors supervised by over current to reduce incident energy and equipment damage
- Arc flash mitigation via zone inter-tripping, flex curves and multiple elements and setting groups
- Powerful security and hierarchical password control for centralized management
- Application flexibility with the use of programmable logic elements
- Drawout design simplifying, commissioning and maintenance, thereby increasing process uptime
- Increased network availability with zero failover time through IEC® 62439-3 PRP and HSR support
- Precise time synchronization through IEEE® 1588 (Precise Time Protocol (PTP)) support
- Robust design exceeding industry standards, with Automotive Grade components and advanced testing procedures such as accelerated life cycle testing
- Simplified migration of legacy MII Family relays to the 3 Series platform

Applications

- Primary protection and control for MV and HV utility and industrial overhead or cable feeder applications
- Protection for distribution transformers of various sizes and voltage levels
- Back-up protection for various HV application and capacitor bank protection
- Advanced control applications including Cold Load Pickup, multi-shot recloser and multiple settings groups
- Protection, control and monitoring of LV Incoming feeder providing flexible communications and eliminating the need for auxiliary equipment
- Protection against corrosion and humidity required for harsh environments



Protection and Control

- Comprehensive current, voltage and frequency protection functions
- Directional Power and Wattmetric Ground Fault
- Wide variety of protection curves
- Synchrocheck, CLP, 2nd Harmonic Blocking, Breaker Failure and Lockout functions
- Integrated arc flash protection

Metering and Monitoring

- Comprehensive metering
- Event Recorder: 256 events (1ms time stamping)
- Programmable oscillography and Fault Report
- Relay health diagnostics
- Breaker monitoring and CT/VT supervision
- Security and password control
- SNTP, IRIG-B or IEEE 1588 time synchronization

Communications

- Front USB and rear serial, Copper/Fiber Ethernet and dual port options for seamless redundancy (IEC 62439-3, PRP and HSR)
- Multiple communication protocols including IEC 61850, IEC 61850 GOOSE, Modbus® TCP/ IP, Modbus RTU, DNP 3.0, IEC 60870-5-104, IEC 60870-5-103 and OPC-UA (IEC 62541)

EnerVista™ Software

- Simplified setup and configuration
- Strong document management system
- Full-featured monitoring and data recording
- Maintenance and troubleshooting tool
- Setting conversion tool for MII Family to 3 Series



GE VERNOVA

Overview

The 350 relay is a member of the 3 Series family of Multilin relays. This protective device is used to perform primary or back-up circuit protection on medium or high voltage feeders or transformers and downstream protection for utility and industrial switchgear. The 350 can be used for a wide variety of protection applications in power systems such as HV/MV or MV/LV transformer protection or capacitor bank protection.

The basic protection provided by this relay includes multiple phase, ground, and neutral time and instantaneous overcurrent elements for coordination with upstream and downstream devices. Additionally, the device provides essential feeder control features such as cold load pickup blocking, 2nd harmonic blocking, breaker failure, synchrocheck and autoreclose.

The robust 350 streamlines user work flow processes and simplifies engineering tasks such as configuration, wiring, testing, commissioning and maintenance. This cost-effective relay also offers enhanced features such as diagnostics, preventative maintenance, arc flash mitigation and security.

Easy to Use

Drawout & Non-Drawout Construction

The 350 is offered in both a drawout and a non-drawout construction. In the drawout case design the 350 simplifies installation and improves site safety as the need to open switchgear doors or rewire the device after testing is eliminated. As communication cables remain connected to the chassis, even when the relay is withdrawn, communications connections are retained.

The 350 protection relay chassis used with a drawout relay is available separately, for use as a partial replacement or in test environments. The drawout relay with no chassis is also available to order as a spare unit.

Application Flexibility & Ease of Wiring

Removable terminals ease wiring and in-system testing or troubleshooting.

Available universal CT inputs along with a software-configurable input range (1A and/or 5A) helps to standardize the design

and reduce the number of order codes. There is also no need to change the entire relay in case of a design change or future switchgear modifications. Mixed inputs of 1A or 5A are advantageous for applications where the ground CT is different from the phase CTs.

Fast and Simple Configuration

With quick setup screens the 350 requires minimal configuration for standard feeder applications. Utilizing the powerful EnerVista 3 Series setup software, device configuration can be completed in one easy step.

Advanced Communications

Easy Integration Into New or Existing Infrastructure

With several Ethernet and serial port options, and a variety of protocols, the 350 provides advanced and flexible communication selections for new and existing energy management, SCADA and DCS systems. The 350 also provides industry-leading protocols such as PRP and HSR, when a failover time in communications is not tolerated.

350 Relay Features



Easy to Configure - 1 Simple Step




Advanced & Flexible Communication Options



Non-drawout case design



Easy to Use - Drawout Case




Diagnostic Alarms



Drawout case design

Functional Block Diagram

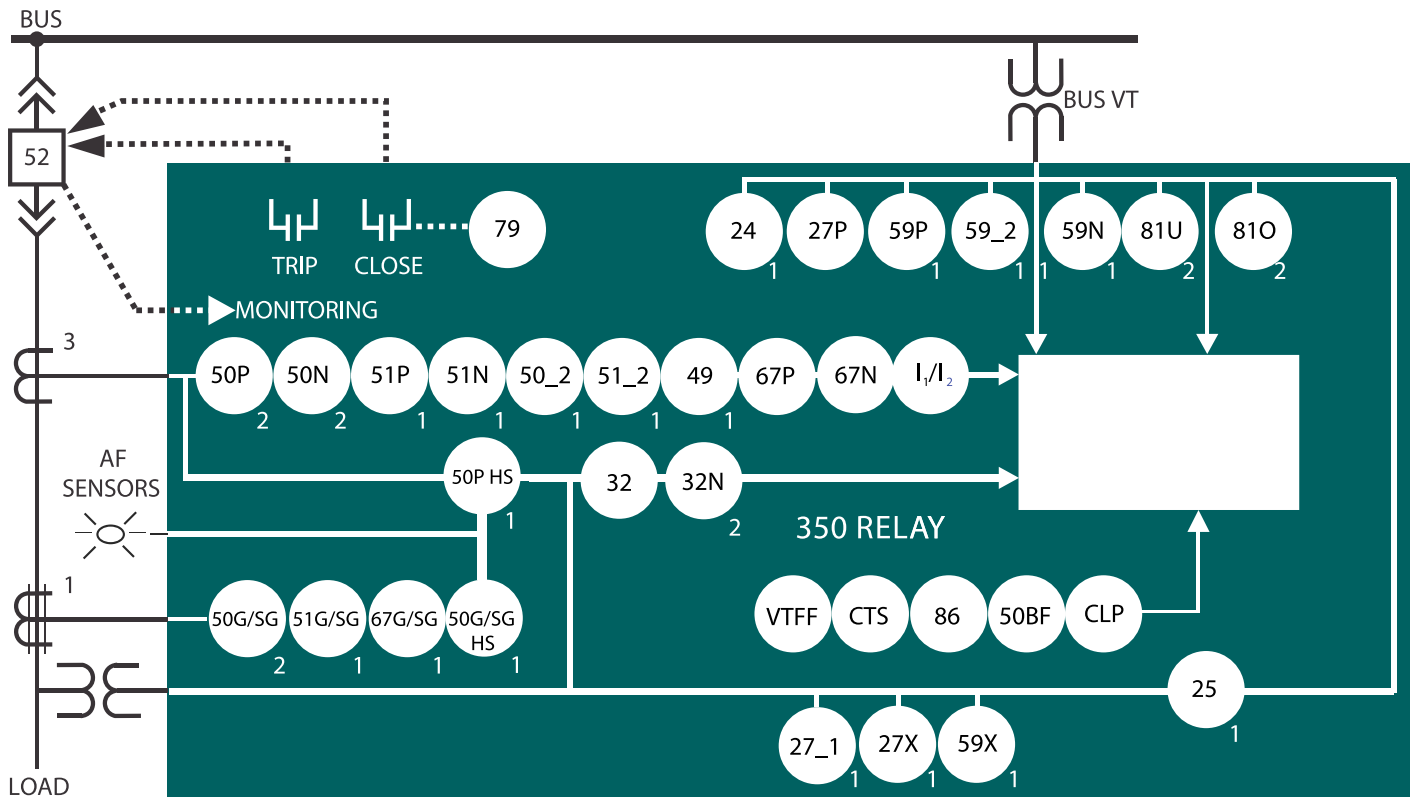

ANSI® Device Numbers & Functions

| DEVICE NUMBER | 61850 LOGICAL NODE | DESCRIPTION |
|---------------|--------------------|--|
| 24 | PVPH | Volts per Hertz |
| 25 | RSYN | Synchrocheck |
| 27_1 | psseqPTUV | Positive Sequence Undervoltage |
| 27P | phsPTU | Phase Undervoltage |
| 27X | auxPTUV | Auxiliary Undervoltage |
| 32 | PDOP | Directional Power |
| 32N | ndPDOP | Wattmetric Ground Fault |
| I1/I2 OR 46BC | | Broken Conductor |
| 49 | PTTR | Thermal Overload |
| 50_2 | ngseqPIOC | Negative Sequence Overcurrent |
| 50BF | RBRF | Breaker Failure |
| 50G/SG | gndPIOC/hsePIOC | Ground (or Sensitive Ground) Instantaneous Overcurrent |
| 50N | ndPIOC | Neutral Instantaneous Overcurrent |
| 50P | phsPIOC | Phase Instantaneous Overcurrent |
| 51_2 | phsPIOC | Negative Sequence Time Overcurrent |

| DEVICE NUMBER | 61850 LOGICAL NODE | DESCRIPTION |
|---------------|--------------------|--|
| 51G/SG | gndPTOC/hsePTOC | Ground (or Sensitive Ground) Time Overcurrent |
| 51N | ndPTOC | Neutral Time Overcurrent |
| 51P | phsPTOC | Phase Time Overcurrent |
| 59_2 | ngseqPTOV | Negative Sequence Overvoltage |
| 59N | ndPTOV | Neutral Overvoltage |
| 59P | phsPTOV | Phase Overvoltage |
| 59X | auxPTOV | Auxiliary Overvoltage |
| 60CTS | | CT Supervision |
| 67G/SG | gndRDIR | Ground (or Sensitive Ground) Directional Element |
| 67N | ndRDIR | Neutral Directional Element |
| 67P | phsRDIR | Phase Directional Element |
| 79 | RREC | Autoreclose |
| 81O | PTOF | Overfrequency |
| 81U | PTUF | Underfrequency |
| 86 | | Lockout |
| CLP | | Cold Load Pickup |
| VTFF (60VTS) | | Voltage Fuse Failure |

Enhanced Diagnostics

Preventative Maintenance

The 350 allows users to track relay exposure to extreme environmental conditions by monitoring and alarming at high ambient temperatures. This data allows proactive scheduling of regular maintenance work and upgrade activities. The diagnostics data enables the user to understand degradation of electronics due to extreme conditions.

Switchgear Diagnostics

The current and voltage transformer monitoring feature allows users to easily locate and troubleshoot potential failures or mis-operations caused by CTs or VTs. Trip/Close Circuit Monitoring provides constant monitoring of the health of the control circuit.

Cost Effective

Robust Design and Reduced Life Cycle Cost

The 350 is subjected to Accelerated Life Testing (ALT) to validate accurate relay function under specified normal conditions. The device is further tested for durability through Highly Accelerated Life Testing (HALT) where it undergoes extreme operating conditions. The robust 350 design along with drawout construction ensures long term operation and reduces the total installation, maintenance and life cycle cost of the protection system, thereby reducing downtime and associated costs.

Fit-for-purpose Options

Several options for protection, control and communications are provided to match basic to high end application requirements. The variety of order code selections satisfies the need for various applications from single-function Current or Voltage protection to multi-function including Power and Directional elements.

Protection

The 350 feeder protection system offers comprehensive fit-for-application protection with multiple elements.

Overcurrent (51P/N/G/SG/_2, 50P/N/G/SG/_2)

The 350 provides three-phase TOC elements including Phase, Neutral, Ground (or Sensitive Ground) and Negative Sequence which enable coordination with upstream and downstream protection devices such as fuses and overload relays, to maximize fault selectivity and minimize interruptions and downtime.

Multiple time current curves are available including IAC, IEC, ANSI and IEEE curves. Additional user-programmable flex curves can be used to customize and meet specific coordination requirements. The TOC has both linear and instantaneous reset timing functions to coordinate with electro-mechanical relays.

The instantaneous TOC element provides fast clearance of high magnitude faults to prevent damage to the power infrastructure and the equipment connected to it.

The neutral overcurrent TOC element is derived as the residual sum of the three-phase CTs, eliminating the need for an additional ground sensor. The sensitive ground protection feature detects

ground faults on high impedance grounded systems in order to limit damage to conductors and equipment. Special low ratio CT's are used for detecting low magnitude ground faults.

Directional Overcurrent (67P, 67N, 67G/SG)

Directional elements determine the phase current flow direction for steady state and fault conditions and can be used to control the operation of the phase overcurrent elements by sending directional bits to inputs of these elements.

The Ground and Neutral Directional element is used to discriminate between faults occurring in a forward or in a reverse direction, and it can be used either individually or with other overcurrent elements to define the trip direction.

The directional ground overcurrent element isolates faulted feeders in ring bus or parallel feeder arrangements. It also allows the detection of back feed fault current from feeders with motors.

Broken Conductor (I1/I2 OR 46BC)

The Broken Conductor detection function detects a line broken conductor condition or a single-pole breaker malfunction condition through checking the phase current input phasors and the I_2 / I_1 ratio.

Voltage and Frequency Protection (27P/X/_1, 59P/59X/N/_2, 81O/U)

Overvoltage and Undervoltage elements provide protection for voltage sensitive equipment as well as control for permissive functions and source transfer schemes.

Overfrequency and underfrequency elements improve network (grid) stability using voltage or frequency based load shedding techniques.

These elements also provide back up protection when protecting feeders and other frequency sensitive power equipment.

Thermal Overload (49)

The thermal overload protection function can be applied to prevent damage to the protected cables, dry transformers, capacitor banks, or even overhead lines. Loads exceeding the load ratings of the protected equipment can, over time, degrade the insulation, and may, in return, lead to short circuit conditions.

This protection feature is essential to ensure the longevity of electrical equipment; particularly important to prevent premature cable failures, expensive repair costs and system down time.

Directional Power (32)

Directional Power, with two independent elements, corresponds to three-phase directional power and is designed for applications requiring reverse power or low forward power.

Wattmetric Ground (32N)

The Wattmetric ground fault element detects feeder/line ground faults in solidly grounded, resistance grounded, ungrounded and resonance grounded networks.

It responds to power derived from zero-sequence voltage and current in a direction specified by the element characteristic angle.

Volts per Hertz (24)

The Volts per Hertz protection prevents damage to generators and transformers due to overexcitation that exceeds the equipment capacity which may lead to thermal overload.

Control

Synchronism Check

The Synchrocheck element monitors the connection of two parts of the circuit by the close of a breaker. This element verifies that voltages on both sides of the breaker are within the magnitude, angle and frequency limits set by the user before closing the breaker, in order to minimize internal damage that could occur due to the voltage difference.

Cold Load Pickup (CLP)

Cold Load Pickup allows automatic or manual blocking or raising of trip settings for a period after the breaker has been closed. This feature adapts the pickup of overcurrent elements to override the higher overload currents resulting from re-energization of the feeder after a certain period of time.

Second-Harmonic Blocking

The second-harmonic blocking element ensures that the protection function will not pick up in the event of transformer start-up, or when CTs are becoming saturated.

Breaker Failure

The Breaker Failure function is used to determine when a trip command sent to a breaker has not been executed within a selectable time delay. In the event of a breaker failure, the 350 will issue an additional signal to trip the breakers connected to the same busbar or to signal the trip of upstream breakers.

Autoreclose

Reclose can be initiated externally or from an overcurrent protection function. Up to four reclose operations are available, each with a programmable dead time. For each reclose shot, the relay can be programmed to block any overcurrent element.

VT and CT Supervision

The CT failure function is designed to detect problems with switchgear current transformers. Failure of a CT secondary wiring that is open (one phase or two phases), can lead to undesired operation by some of the enabled protection elements. VT fuse failure is used to detect various VT failure modes.

Lockout

The purpose of the Lockout function is to prevent unwanted closing of the breaker after being tripped by the operation of a protection element. A dedicated lockout function with ten individual inputs is available.

Logic Designer

Save

Restore

Default

| SETTING | PARAMETER |
|------------------------|------------------|
| LOGIC ELEMENT 1 | |
| Name | Alarm #1 |
| Function | Disabled |
| Asserted | On |
| Number of Triggers | 8 |
| Trigger Source 1 | Contact IN 1 On |
| Trigger Source 2 | Contact IN 2 On |
| Trigger Source 3 | LE 1 Trip PKP |
| Trigger Source 4 | LE 2 Trip OP |
| Trigger Source 5 | Virtual IN 1 On |
| Trigger Source 6 | Virtual IN 2 On |
| Trigger Source 7 | Remote IN 10 Off |
| Trigger Source 8 | Remote IN 21 Off |
| Trigger Logic | OR |
| Pickup Time Delay | 5 ms |
| Dropout Time Delay | 15 ms |
| Relays | Relay : 4 |
| Number of Blocks | 4 |
| Block 1 | Virtual IN 1 On |
| Block 2 | Virtual IN 2 On |
| Block 3 | Remote IN 1 On |
| Block 4 | Remote IN 7 Off |
| Block Logic | XOR |

Contact IN 1 On
Contact IN 2 On
LE 1 Trip PKP
LE 2 Trip OP
Virtual IN 1 On
Virtual IN 2 On
Remote IN 10 Off
Remote IN 21 Off

OR

Virtual IN 1 On
Virtual IN 2 On
Remote IN 1 On
Remote IN 7 Off

XOR

AND

5 ms 15 ms


Sixteen logic elements available for applications such as manual control, interlocking and peer to peer tripping.

Integrated Arc Flash Protection

Traditional selectivity methods may not provide fast and accurate protection. Arc flash incident energy, which is a result of a fault, can endanger people and assets and impact power system reliability. The Multilin 350 supports an integrated arc flash module providing constant monitoring of an arc flash condition within the switchgear. The 350 is able to detect light and overcurrent using 4 arc sensors connected to the relay. In situations where an arc flash/fault does occur, the relay is able to quickly identify the fault and issue a trip command to the associated breaker(s) thereby reducing the total incident energy and minimizing resulting equipment damage.

Self-monitoring and diagnostics of the sensors ensures the health of the sensors as well as the full length optical fiber cables. Programmable LEDs on the front panel display of the 350 can be configured to indicate the health of the sensors and its connections to the relay.

The 350 supports both point and loop sensors which are suitable for a particular compartment or the entire busbar section of a MV or LV switchgear. Same input supports point and loop, and they are field interchangeable. Logic operands are available for arc flash elements.

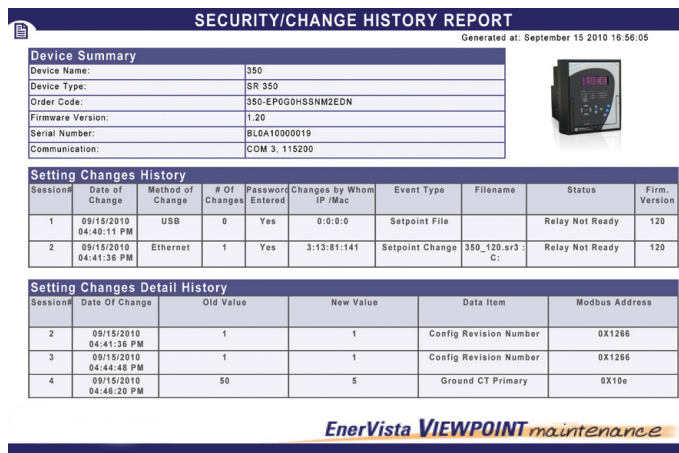

Trace any setting changes with security audit trail

Automation and Integration


Inputs and Outputs

The 350 features the following inputs and outputs for monitoring and control of typical feeder applications:

- 10 contact Inputs with programmable thresholds
- 2 Form A outputs for breaker trip and close with coil monitoring and 5 Form C output relays (3 Form C output relays in Arc Flash configuration)

IEC 61850 GOOSE


The 350 supports IEC 61850 which allows for digital communications to DCS, SCADA and higher level control systems. In addition, the 350 also supports IEC 61850 GOOSE communication, providing a means of sharing digital point state information between several 350 relays or other IEC 61850 compliant IEDs.

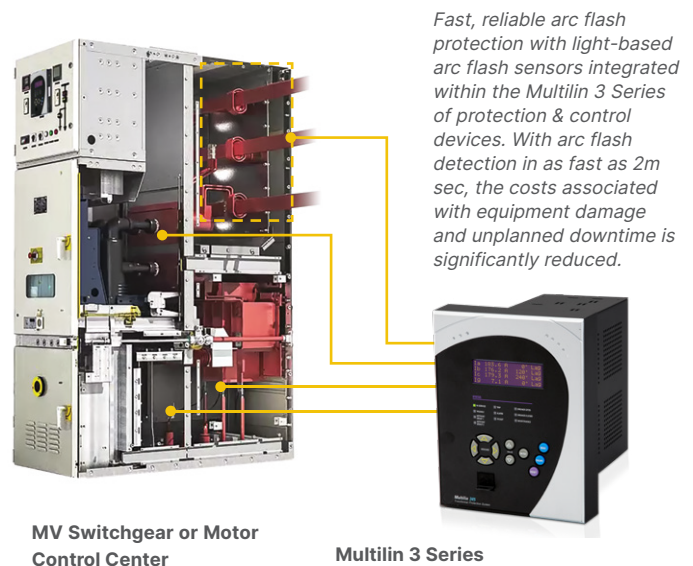

Fast, reliable arc flash protection with light-based arc flash sensors integrated within the Multilin 3 Series of protection & control devices. With arc flash detection in as fast as 2m sec, the costs associated with equipment damage and unplanned downtime is significantly reduced.

Power System Troubleshooting

Analyze power system disturbances with transient fault recorder and event records

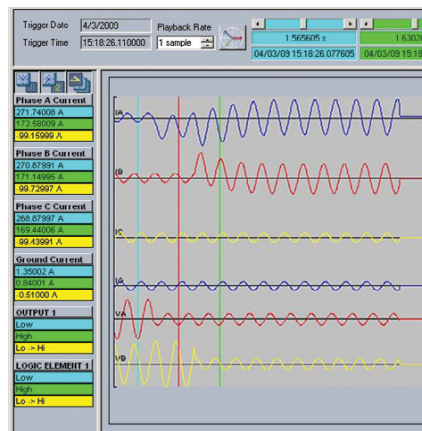

Event Records // Quick Connect: Quick Connect Device: Actual Values: A3 Records

| Event | Select | Date | Time | Cause of Event |
|-------|-------------------------------------|-----------|--------------|--------------------------|
| 76 | <input type="checkbox"/> | 03/4/2009 | 15:02:55.561 | Reset |
| 75 | <input checked="" type="checkbox"/> | 03/4/2009 | 15:02:12.900 | Breaker Status Open |
| 74 | <input type="checkbox"/> | 03/4/2009 | 15:02:12.901 | Contact Input 1 Off |
| 73 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.775 | Phase C TOC Trip Operate |
| 72 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.775 | Phase A TOC Trip Operate |
| 71 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.759 | Output Relay 3 |
| 70 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.759 | Trip Coil |
| 69 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.759 | Trip Coil Pickup |
| 68 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.758 | Phase TOC Trip Operate |
| 67 | <input type="checkbox"/> | 03/4/2009 | 15:02:11.758 | Phase B TOC Trip Operate |

All None Select Events 75


| Event Parameter | Value |
|-----------------|----------|
| Event Ia | 0° Lag |
| Event Ib | 120° Lag |
| Event Ic | 240° Lag |
| Event Ig | 0° Lag |
| Event Frequency | 59.99 Hz |
| Therm Cap PH A | 0.0% |
| Therm Cap PH B | 0.0% |
| Therm Cap PH C | 0.0% |

Fault Report // New Site 1: SR350_USB: Actual Values: A3 Recorder

Save Restore Default

| PARAMETER | VALUE |
|-------------------------------|--------------------|
| Fault Report Order Code | 350-LP5GSHSMCVSEDN |
| Fault Report Feeder Name | Feeder Name |
| Fault Report Firmware Version | 2.20 |
| Fault Report Date | 06/30/2016 |
| Fault Report Time | 07:35:17 |
| Fault Report Fault Type | Phase IOC1 Trip OP |
| Active Setpoint Group | Group 1 |
| Fault Report Ia | 40.0 A |
| Fault Report Ia Angle | 358° |
| Fault Report Ib | 40.0 A |
| Fault Report Ib Angle | 117° |
| Fault Report Ic | 39.3 A |
| Fault Report Ic Angle | 237° |
| Fault Report Ig | 0.0 A |
| Fault Report Ig Angle | 0° |
| Fault Report In | 0.0 A |
| Fault Report In Angle | 0° |
| Fault Report Va | 30 V |
| Fault Report Va Angle | 0° |
| Fault Report Vb | 30 V |
| Fault Report Vb Angle | 120° |
| Fault Report Vc | 30 V |
| Fault Report Vc Angle | 240° |
| Fault Report Vab | 52 V |
| Fault Report Vab Angle | 120° |

Example of Redundant HSR and PRP Architecture

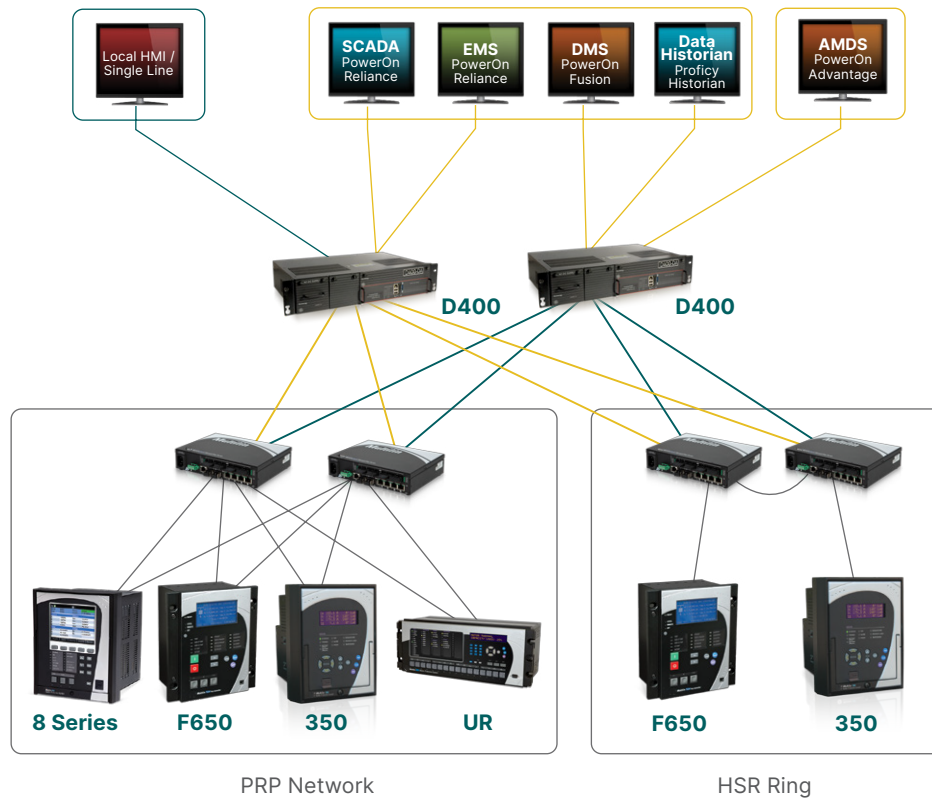

Redundancy protocols (PRP and HSR) can be used for various networking architectures including combined PRP/HSR topologies.

- Eliminates the need for hardwiring contact inputs to contact outputs via communication messaging.
- Handles information exchange between devices as fast as 8 ms, depending on the architecture.
- Enables sequence coordination with upstream and downstream devices.
- If Breaker Open operation malfunctions, GOOSE messaging sends a signal to the upstream breaker to trip and clear the fault.

Logic Elements

The 350 relay has sixteen Logic Elements available for the user to build simple logic using the state of any programmed contact, virtual, or remote input, or the output operand of a protection or control element.

Use the logic element feature to assign up to eight triggering inputs in an "AND/OR/NOR/NAND/XOR/XNOR" gate for the logic element operation, and up to four blocking inputs in an "AND/OR/NOR/NAND/XOR/XNOR" gate for defining the block signal. Trigger and block sources are grouped for ease of use. Pickup and dropout timers are available for delaying the operation and reset.

Virtual Inputs

Virtual inputs allow communication devices the ability to write digital commands to the 350 relay. These commands can include open/close the breaker, changing setting groups, or blocking any of the protection elements.

Multiple Settings Groups

Two separate settings groups are stored in nonvolatile memory, with only one group active at a given time. Switching between the two setting groups is done by means of a setting, a communications command, or contact input activation. The two settings groups allow users to quickly adapt settings to match new power system conditions, or to maintain alternate profiles such as settings used during maintenance operations.

Metering, Monitoring and Diagnostics

Event Recording

Events consist of a broad range of change of state occurrences, including pickups, trips, contact operations, alarms and self test status. The 350 relay stores up to 256 events, time tagged to the nearest millisecond. This provides the information required to determine sequence of events, facilitating the diagnosis of relay operation. Event types are individually maskable in order to avoid generating undesired events, and include the metered values at the moment of the event.

Oscillography/ Transient Fault Recorder

The 350 captures current and voltage waveforms and digital channels at up to 32 samples per cycle (user-selectable). Multiple records can be stored in the relay at any given time with a maximum length of 192 cycles. Oscillography is triggered either by internal signals or an external contact.

Test Mode

The Test Mode for 3 Series relays consists of testing front panel LEDs, Inputs and Outputs. It can be used to test the SCADA system as well.

Trip/Close Coil Monitoring

The 350 can be used to monitor the integrity of both the breaker trip and closing coils and circuits. The supervision inputs monitor both the auxiliary voltage levels, while the outputs monitor the continuity of the trip and/or closing circuits, by applying a small current through the circuits.

Metering

Metered values include:

- Current: Ia, Ib, Ic, In, Ig, Isg
- Phase-to-phase and phase-to-ground voltages for bus and line: Van, Vbn, Vcn, Vab, Vbc, Vca and Frequency
- Demand (different types), Active and Reactive power (3-Phase)

Advanced Device Health Diagnostics

The 350 performs comprehensive device health diagnostic tests during startup and continuously at runtime to test major functions and critical hardware. These diagnostic tests monitor for conditions that could impact system reliability. Device status is communicated via SCADA communications and the front panel display. This continuous monitoring and early detection of possible issues helps improve system availability by employing predictive maintenance.

Time Synchronization

The IEEE 1588 Precision Time Protocol (PTP) synchronizes the time between different nodes on an Ethernet network and is used when very precise time synchronization is required.

It is possible to synchronize distributed clocks with an accuracy of less than 1 microsecond via Ethernet networks. PTP enables clock redundancy and reduces wiring and testing. It can operate over a complete facility and has the ability to compensate for lead length.

IRIG-B is a standard time code format that allows time stamping of

events to be synchronized among connected devices to within 1 millisecond. An IRIG-B input is provided in the 350 to allow time synchronization using a GPS clock over a wide area. The 350 IRIG-B supports both AM and DC time synchronization, with an auto detect feature that eliminates the need for configuration.

Temperature Monitoring

The 350 continually monitors ambient temperature around the relay and alarms when the device is exposed to extreme temperatures and undesirable conditions such as air-conditioning unit or station heater failures.

The EnerVista Viewpoint maintenance tool allows users to review and analyze the time period a 350 relay is exposed to certain temperature ranges.

Security

Password Control

The password system has been designed to facilitate a hierarchy for centralized management. With the implementation of the Password Security feature in the 350 relay, extra measures have been taken to ensure unauthorized changes are not made to the relay. When password security is enabled, changing of setpoints or issuing of commands requires passwords to be entered. Separate passwords are supported for remote and local operators, and separate access levels support changing of setpoints or sending commands.

Advanced Communications

The 350 incorporates the latest communication technologies, making it the easiest and the most flexible feeder protection relay for use and integration into new and existing infrastructures. The 350 relay provides the user with one front USB and one rear RS485 communication port. Also available with the 350 is a rear communication port with Ethernet Fiber and Copper. For configurations requiring PRP and HSR redundancy protocols, the 350 provides two rear Fiber ports. Through the use of these ports, continuous monitoring and control from a remote computer, SCADA system or PLC is possible.

The 350 provides optional Parallel Redundancy Protocol (PRP) and High Availability Seamless Ring (HSR) according to the IEC 62439-3 standard that defines two protocols to increase network availability by reducing failover time to zero. Both ports are capable of simultaneously supporting the following protocols: Modbus TCP/IP, IEC 61850, DNP3 or IEC 60870-5-104, IEEE 1588, SNTP and OPC-UA.

The basic concept of both protocols, PRP and HSR, is to send identical frames over different paths and discard one of the copies in reception, at best. If an error occurs or one of the paths goes down, the frame travelling through that path will not reach its destination, but its copy remains intact and will reach the desired destination. This technology ensures high reliability and availability of communication networks by providing redundancy and zero reconfiguration time in the event of a failure. Failsafe communications systems are crucial for industries and utilities with critical applications where no recovery time is tolerated.

Link Loss Alert (LLA) function detects any issue with one port and switch to the other one in case of failure.

The 350 supports popular industry-leading standard protocols enabling easy, direct integration into electrical SCADA and HMI systems. The protocols supported by the 350 include:

- IEC 61850
- IEC 61850 GOOSE
- DNP 3.0
- Modbus RTU
- Modbus TCP/IP
- IEC 60870-5-103
- IEC 60870-5-104
- PRP and HSR (IEC 62439-3)
- Link Loss Alert (LLA)
- OPC-UA
- IEEE 1588 for time synchronization

The 350 relay provides Precision Time Protocol (PTP) based on IEEE 1588 for precise time synchronization throughout a network. OPC-UA based on IEC 62541 is another feature that the 350 relay offers.

These protocols make it easy to connect to a utility or industrial automation system, eliminating the need for external protocol converter devices.

EnerVista Software

The EnerVista suite is an industry leading set of software programs that simplifies every aspect of using the 350 relay. The EnerVista suite provides all the tools to monitor the status of the protected asset, maintain the relay, and integrate the information measured into DCS or SCADA monitoring systems. Convenient COMTRADE and sequence of event viewers are an integral part of the 350 set up software and are included to ensure proper protection and system operation.

Simplified Feeder Setup

The 350 Feeder Protection System includes a simplified setup process. This simplified feeder setup consists of minimal settings and can be accessed through the relay front panel or via the EnerVista Setup software. Once the information is entered, the simplified setup will generate a settings file, and provide documentation indicating which settings are enabled along with an explanation of the parameters entered.

Viewpoint Monitoring

Viewpoint Monitoring is a simple to use and full featured monitoring and data recording software package for small systems. Viewpoint monitoring provides a complete HMI package with the following functionality

- Plug and play device monitoring
- System single line monitoring and control
- Annunciator alarm screens
- Trending reports
- Automatic event retrieval
- Automatic waveform retrieval:

Viewpoint Maintenance

Viewpoint Maintenance provides tools that will increase the security of the 3 Series. Viewpoint Maintenance will create reports on the operating status of the relay, and simplify the steps to troubleshoot protected motors.

The tools available in Viewpoint Maintenance include:

- Settings Security Audit Trail
- Device Health Report
- Comprehensive Fault Diagnostics

EnerVista Integrator

EnerVista Integrator is a toolkit that allows seamless integration of Multilin devices into new or existing automation systems.

Included in the EnerVista Integrator is:

- OPC/DDE Server
- Multilin Devices
- Automatic Event Retrieval
- Automatic Waveform Retrieval

Display

A 4-line liquid crystal display (LCD) allows visibility under varied lighting conditions. When the keypad and display are not being used, the metering summary page is displayed to show critical metered values.

LEDs

The 350 relay has 12 LEDs, including 8 optional programmable LEDs that provide status indication for various conditions of the relay and the system. The LED indications are color coded to indicate the type of event.

User Interface



SETPOINT GROUP 1, 2:

Trip, Alarm and Pickup indicators are continuously on for protection elements.

DISPLAY:

4-line text for easy viewing of key data and navigating through menu

LEDs:

10/12 LED indicators for quick diagnostics

KEYPAD:

10 button keypad for access to device interrogation, change of settings and control commands.

FRONT PORT:

Electrically isolated front USB communication port

INSTALLATION OPTIONS:

Drawout and non-drawout options available

Feeder protection settings in one easy step



Fast and accurate configuration in one simple screen.

| GROUPED ELEMENTS | OUTPUT RELAYS | | | | GROUP 1 | | | | GROUP 2 | | | |
|-----------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| | R3 | R4 | R5 | R6 | R3 | R4 | R5 | R6 | R3 | R4 | R5 | R6 |
| Phase TOC | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Latched Alarm | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Phase IOC1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Trip | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Phase IOC2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Ground TOC | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Ground IOC1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Ground IOC2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Ground Directional | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Neutral TOC | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Alarm | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Neutral IOC1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Latched Alarm | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Neutral IOC2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Neutral Directional | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Negative Sequence IOC | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Phase UV | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Trip | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Phase OV | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Neutral UV | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Negative Sequence OV | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Auxiliary UV | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Auxiliary OV | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Under-frequency 1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Trip | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Under-frequency 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Over-frequency 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Over-frequency 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Disabled | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Cable Thermal Model | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Unsat | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| CONTROL ELEMENTS | | | | | | | | | | | | |
| Logic Element 1 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Unsat | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Logic Element 2 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Unsat | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

3 Series setup software protection summary for viewing a summary of Protection & Control configuration.

Retrofit Existing Multilin MII Family Devices

Traditionally, retrofitting or upgrading an existing relay has been a challenging and time consuming task often requiring re-engineering, panel modifications and re-wiring. Similar features and form factor of some models of MII family devices allow users to replace their existing relays with 3 Series relays with enhanced protection and control features and advanced communications. The [Multilin™ 3 Series Retrofit Instruction Manual](#) offers a solution to upgrade previously installed Multilin relays.



The SR3 Enervista Setup software allows users to create new setting files based on existing MIFII and MIVII setting files and can be uploaded to a 350 relay with a compatible model number. Retrofit is smooth and simplified with minor wiring or switchgear modifications.



| Display Filter | | | |
|-------------------------------------|----------------------------|---|--|
| <input checked="" type="checkbox"/> | Successfully Converted | 9 | |
| <input checked="" type="checkbox"/> | Needs Verification | 3 | |
| <input checked="" type="checkbox"/> | Needs Manual configuration | 0 | |


| SettingName | SettingValue | Original SettingName | Original SettingValue |
|------------------------------------|--------------|----------------------|-----------------------|
| File | | | |
| Relay Information | | | |
| Product Name | 350 | Product Name | MIF |
| Version | 220 | Version | 303 |
| Notes | | | |
| Rest Of the settings are defaulted | . | | |
| Setpoints | | | |
| S1 Relay Setup | | | |
| Communications | | | |
| RS485 | | | |
| RS485 Comm Parity | None | | |
| Rear 485 Protocol | Modbus | | |
| Ethernet | | | |
| IP Settings | | | |
| Ethernet IP address | 0 | | |
| Ethernet subnet mask | 4294966272 | | |
| Ethernet gateway address | 0 | | |
| Transient Recorder | | | |
| Transient Buffer Setup | 1 x 192 | | |
| Trigger Mode | Overwrite | | |
| Trace Memory Trigger Position | 8 % | | |

Dimensions

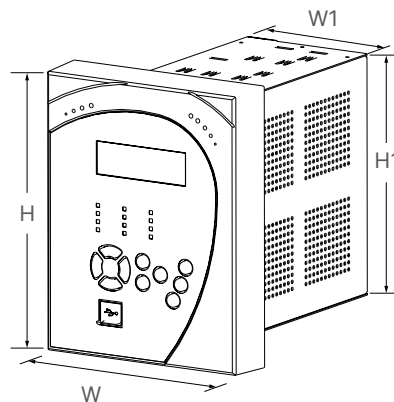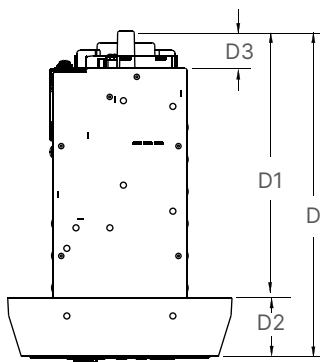


| | DRAWOUT | | NON-DRAWOUT | |
|----|---------|-------|-------------|-------|
| | in | mm | in | mm |
| H | 7.93 | 201.5 | 7.98 | 202.7 |
| W | 6.62 | 168.2 | 6.23 | 158.2 |
| D | 9.62 | 244.2 | 9.35 | 237.5 |
| W1 | 3.96 | 100.6 | 3.96 | 100.6 |
| D1 | 7.89 | 200.4 | 7.88 | 200.2 |
| D2 | 1.73 | 43.8 | 1.47 | 37.3 |
| D3 | 1.087 | 27.6 | 0.755 | 19.17 |
| H1 | 6.82 | 173.2 | 6.82 | 173.2 |


Mounting

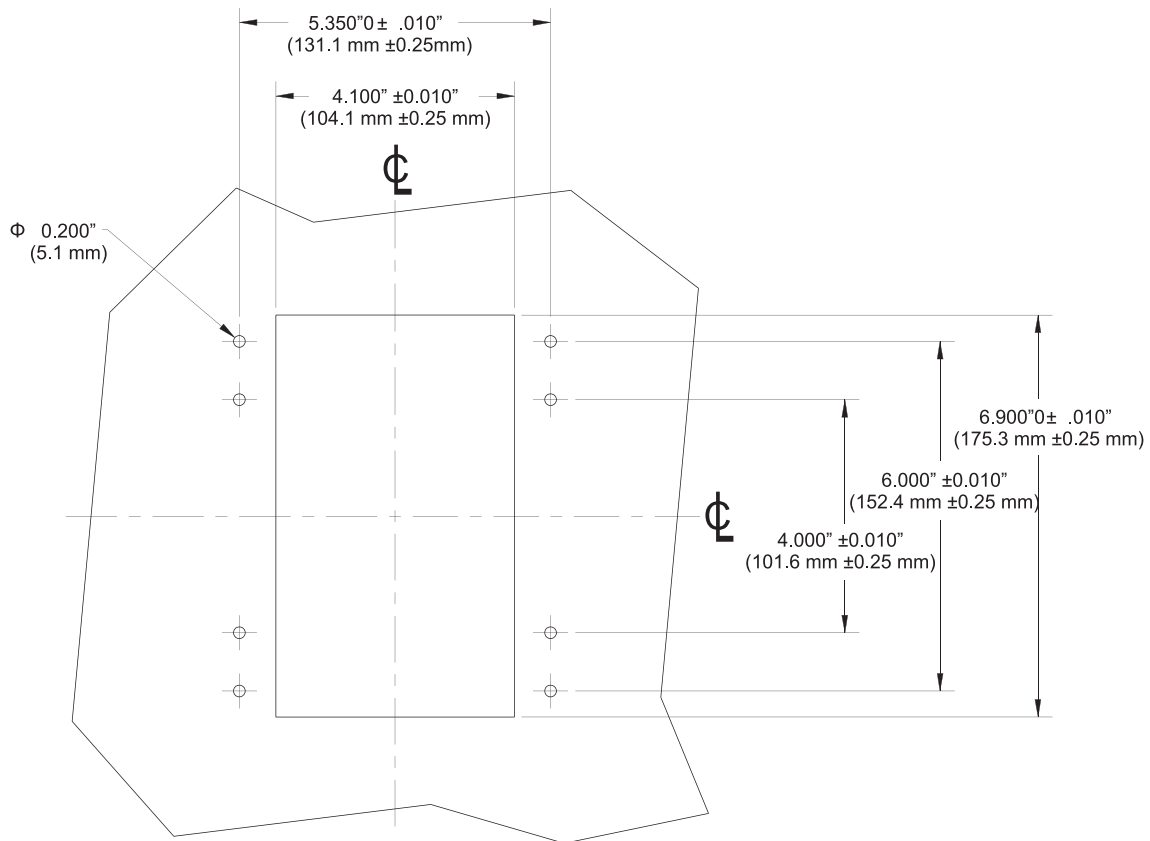

3 Series Depth Reducing Collar

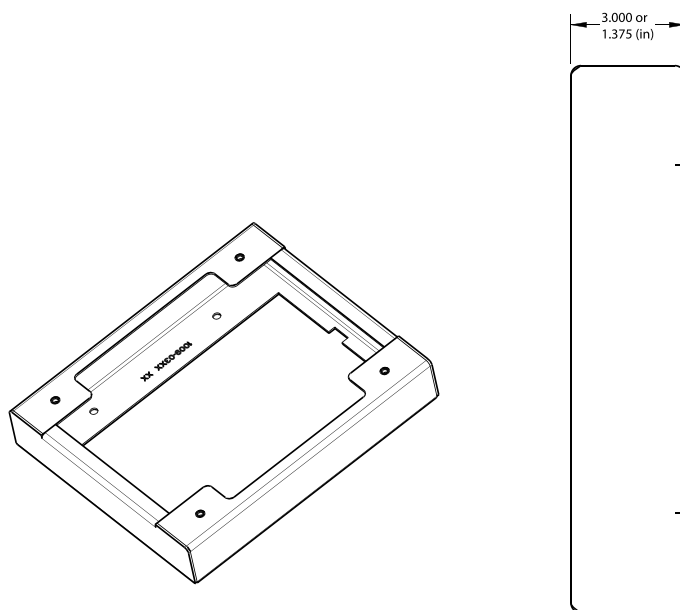

Typical Wiring Diagram - Drawout

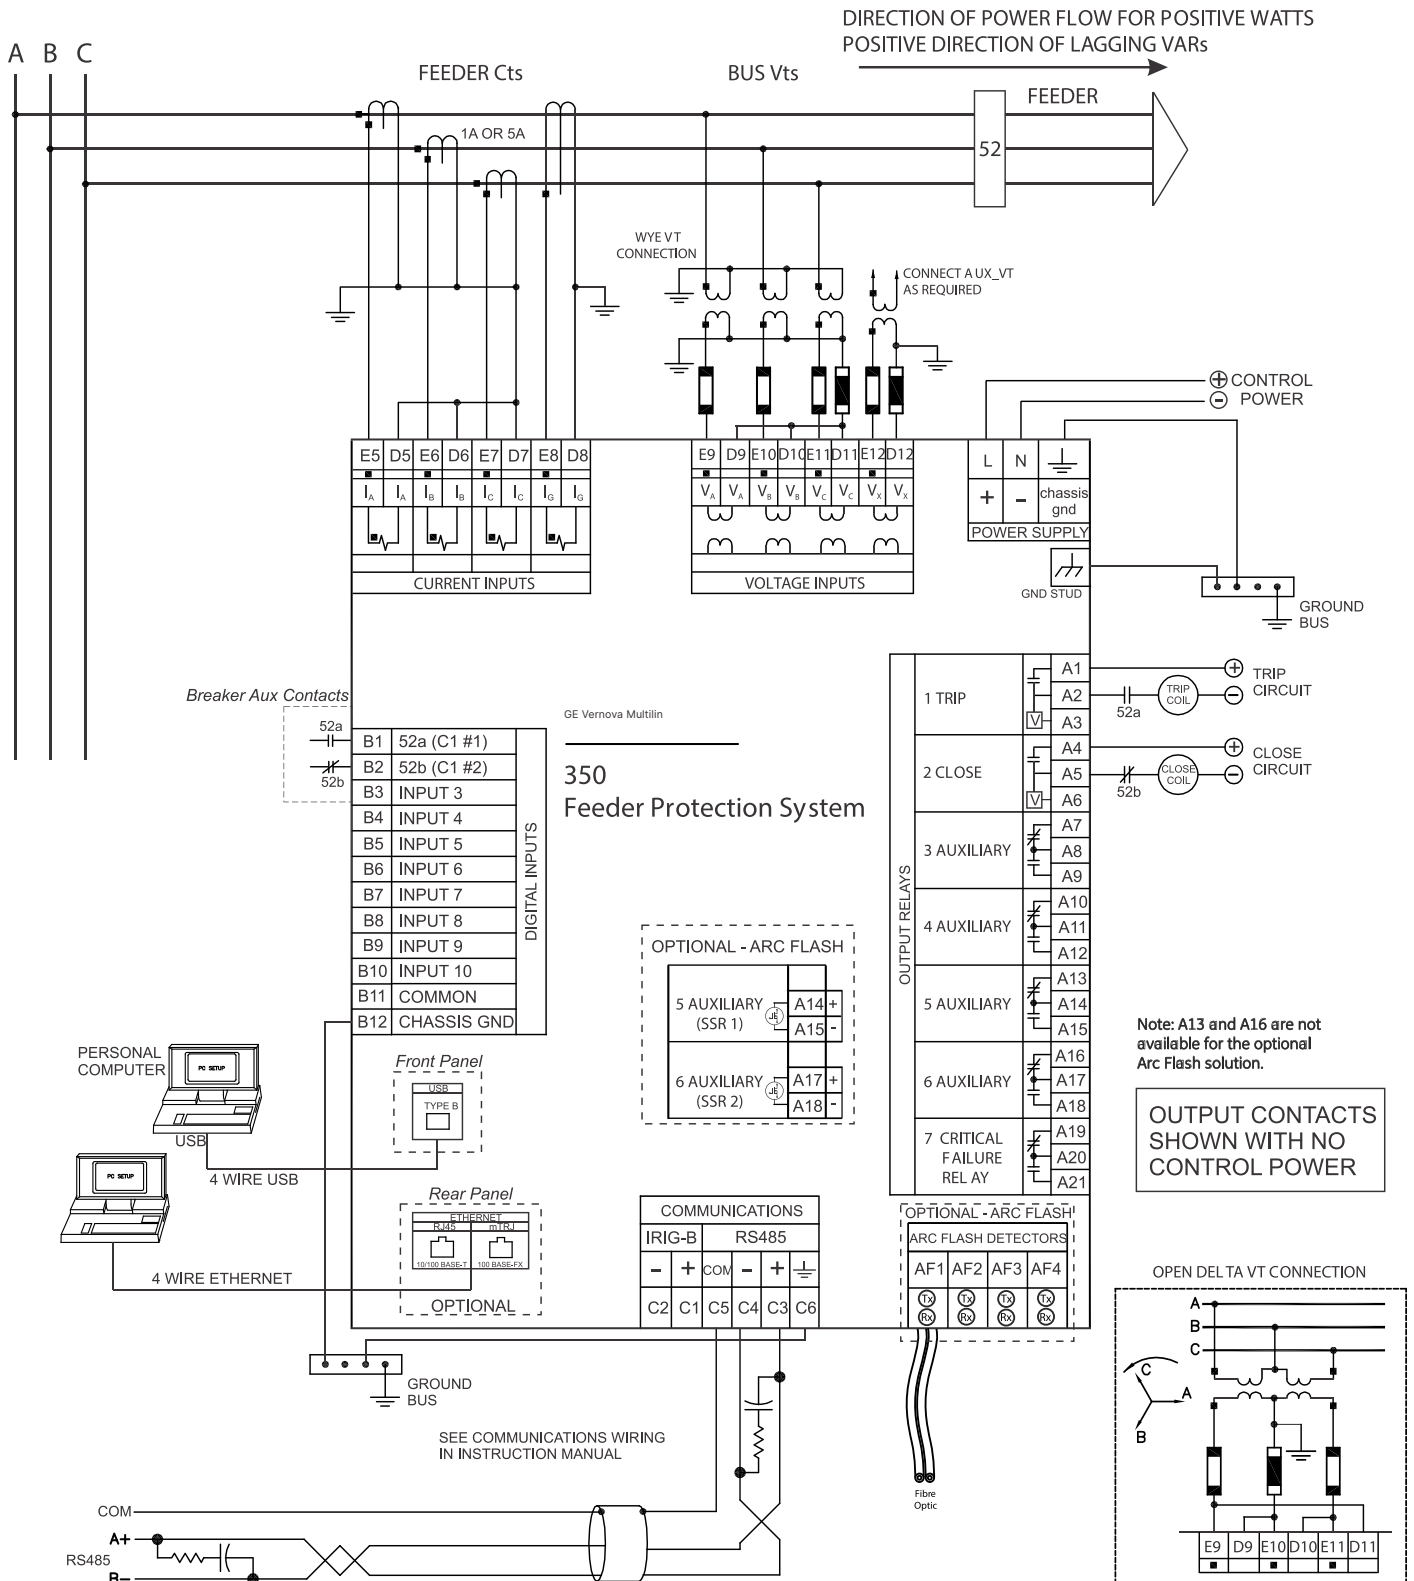

Current Inputs does not exist in "V" option.
 Please refer to the manual for non-drawout wiring.

Technical Specifications

PASSWORD SECURITY

| | |
|-----------------------|--|
| Master Reset Password | 8 to 10 alpha-numeric characters |
| Settings Password | 3 to 10 alpha-numeric characters for local and remote access |
| Control Password | 3 to 10 alpha-numeric characters for local and remote access |

PHASE/NEUTRAL/GROUND/NEGATIVE SEQUENCE TIME OVERCURRENT (51P/51N/51G/51_2)

| | |
|----------------------|--|
| Pickup Level: | 0.05 to 20.00 x CT in steps of 0.01 x CT |
| Dropout Level: | 97% of Pickup @ $I > 1 \times CT$ Pickup - 0.02 x CT @ $I < 1 \times CT$ |
| Curve Shape: | ANSI Extremely/Very/Moderately/Normally Inverse Definite Time (0.1 s base curve) IEC Curve A/B/C/Short IAC Extreme/Very/Inverse/Short User Curve, FlexCurve™ A/B (programmable curves) |
| Curve Multiplier: | 0.05 to 50.00 in steps of 0.01 |
| Reset Time: | Instantaneous, Linear |
| Time Delay Accuracy: | ±3% of expected inverse time or 1.5 cycle, whichever is greater, from pickup to operate |
| Level Accuracy: | per CT input |

SENSITIVE GROUND TIME OVERCURRENT (51SG)

| | |
|----------------------|--|
| Pickup Level: | 0.005 to 3.000 x CT in steps of 0.001 x CT |
| Dropout Level: | 97% of Pickup @ $I > 0.1 \times CT$ Pickup - 0.002 x CT @ $I < 0.1 \times CT$ |
| Curve Shape: | ANSI Extremely/Very/Moderately/Normally Inverse Definite Time (0.1 s base curve) IEC Curve A/B/C/Short Inverse IAC Extreme/Very/Inverse/Short Inverse User Curve, FlexCurve™ A/B |
| Curve Multiplier: | 0.05 to 50.00 in steps of 0.01 |
| Reset Time: | Instantaneous, Linear |
| Time Delay Accuracy: | ±3% of expected inverse time or 1 cycle, whichever is greater, from pickup to operate |
| Level Accuracy: | per CT input |

PHASE/NEUTRAL/GROUND/NEGATIVE SEQUENCE INSTANTANEOUS OVERCURRENT (50P/50N/50G/50_2)

| | |
|----------------------|--|
| Pickup Level: | 0.05 to 20.00 x CT in steps of 0.01 x CT |
| Dropout Level: | 97% of Pickup @ $I > 1 \times CT$ Pickup - 0.02 x CT @ $I < 1 \times CT$ |
| Time delay: | 0.00 to 300.00 sec in steps of 0.01 |
| Operate Time: | <30 ms @ 60Hz ($I > 2.0 \times PKP$, No time delay) <35 ms @ 50Hz ($I > 2.0 \times PKP$, No time delay) |
| Time Delay Accuracy: | 1% or 1 cycle, whichever is greater (Time Delay selected) |
| Level Accuracy: | per CT input |

SENSITIVE GROUND INSTANTANEOUS OVERCURRENT (50SG)

| | |
|----------------------|--|
| Pickup Level: | 0.005 to 3.000 x CT in steps of 0.001 x CT |
| Dropout Level: | 97% of Pickup @ $I > 0.1 \times CT$ Pickup - 0.002 x CT @ $I < 0.1 \times CT$ |
| Time delay: | 0.00 to 300.00 sec in steps of 0.01 |
| Operate Time: | <30 ms @ 60Hz ($I > 2.0 \times PKP$, No time delay) <35 ms @ 50Hz ($I > 2.0 \times PKP$, No time delay) |
| Time Delay Accuracy: | 1% or 1 cycle, whichever is greater (Time Delay selected) |
| Level Accuracy: | per CT input |

PHASE DIRECTIONAL (67P)

| | |
|------------------------------|--|
| Directionality: | Co-existing forward and reverse |
| Operating: | Phase Current (I_a , I_b , I_c) |
| Polarizing Voltage: | Quadrature Voltage (ABC phase sequence: V_{bc} , V_{ca} , V_{ab}) (CBA phase sequence: V_{cb} , V_{ac} , V_{ba}) |
| Polarizing Voltage Threshold | 0.05 to 1.25 x VT in steps of 0.01 |
| MTA | From 0° to 359° in steps of 1° |
| Angle Accuracy: | ±4° |
| Operation Delay: | 20 to 30 ms |

ARC FLASH HS PHASE/GROUND INSTANTANEOUS OVER CURRENT HS 50P/50G

| | |
|----------------|---|
| Current | Phasor Magnitude (special high speed algorithm) |
| Pickup Level | 0.05 to 30.00 x CT in steps of 0.01 x CT (Ph/Gnd) 0.005 to 3.000 x CT in steps of 0.001 (SGnd) |
| Dropout Level | 97% of Pickup |
| Level Accuracy | For 0.05 to 0.2 x CT: ± 2% of reading or 1.5% of rated, whichever is greater For > 0.2 x CT: ± 5% of reading |
| Operate Time: | 5 ms at > 6 x Pickup 4-8 ms at > (3-6) x Pickup |

ARC FLASH SENSOR/FIBER

| | |
|---|-------------------------------------|
| Number of Point Sensors | 4 |
| Detection Acceptance Cone (Point Sensor): | minimum 180° spherical |
| Maximum Fiber Length (Point Sensor): | 35 m |
| Maximum Fiber Length (Loop Sensor): | 70 m |
| Fiber Size: | 1000 μm |
| Mode | Multi-mode |
| Connector | BROADCOM (c) Compact Versatile-Link |
| Fiber Type | Plastic Optical Fiber |
| Bend Radius | 35 mm minimum |

GROUND DIRECTIONAL (67G)


| | |
|---------------------|---|
| Directionality: | Co-existing forward and reverse |
| Operating: | Ground Current (I _g) |
| Polarizing Voltage: | - V ₀ calculated using phase voltages (VTs must be connected in "Wye") - 3V ₀ measured from Vaux input. (3V ₀ provided by an external open delta connection). |
| MTA: | From 0° to 359° in steps of 1° |
| Angle Accuracy: | ±4° |
| Operation Delay: | 20 to 30 ms |

NEUTRAL DIRECTIONAL (67N)

| | |
|---------------------|--|
| Directionality: | Co-existing forward and reverse |
| Polarizing: | Voltage, Current, Dual |
| Polarizing Voltage: | - V ₀ calculated using phase voltages (VTs must be connected in "Wye") - 3V ₀ measured by Vaux input (3V ₀ provided by an external open delta connection). |
| Polarizing Current: | I _g |
| MTA: | From 0° to 359° in steps of 1° |
| Angle Accuracy: | ±4° |
| Operation Delay: | 20 to 30 ms |

THERMAL OVERLOAD (49)

| | |
|------------------|---|
| Current: | RMS current - max (I _a , I _b , I _c) |
| Pickup Accuracy: | per current inputs |
| Timing Accuracy: | See graph below |

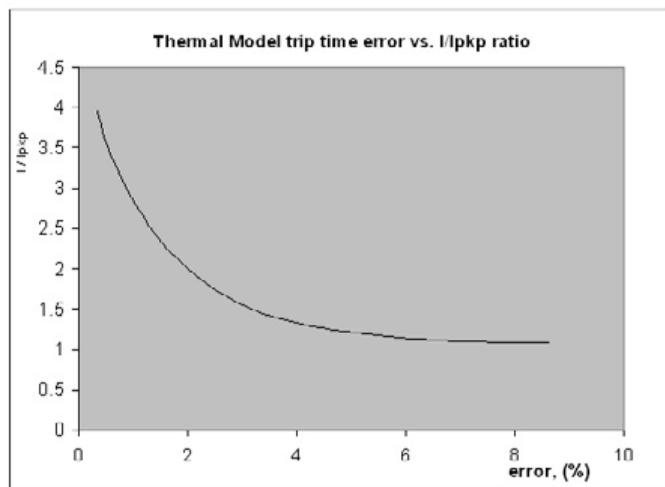

The graph shows the trip time error with respect to the ratio of cable load and thermal model pickup setting. With a smaller I/lpkp ratio, the time error tends to be higher, as accumulated through the logarithmic formula, the measurement error, and the time of measurement. For higher I/lpkp ratios, the time to trip is substantially more accurate. Each point on the graph represents a trip time error, with the I/lpkp ratio kept constant during the test.

METERING SPECIFICATIONS

| Parameter | Accuracy | Resolution | Range |
|----------------------------------|-------------------|--------------|-------------------|
| 3-Phase Real Power (kW) | ±1% of full scale | 0.1 MW | ±100000.0 kW |
| 3-Phase Reactive Power (kvar) | ±1% of full scale | 0.1 Mvar | ±100000.0 kvar |
| 3-Phase Apparent Power (kVA) | ±1% of full scale | 0.1 MVA | 100000.0 kVA |
| 3-Phase Positive Watthour (MWh) | ±1% of full scale | ±0.001 MWh | 50000.0 MWh |
| 3-Phase Negative Watthour (MWh) | ±1% of full scale | ±0.001 MWh | 50000.0 MWh |
| 3-Phase Positive Varhour (Mvarh) | ±1% of full scale | ±0.001 Mvarh | 50000.0 Mvarh |
| 3-Phase Negative Varhour (Mvarh) | ±1% of full scale | ±0.001 Mvarh | 50000.0 Mvarh |
| Power Factor | ±0.05 | 0.01 | -0.99 to 1.00 |
| Frequency | ±0.05 Hz | 0.01 Hz | 40.00 to 70.00 Hz |

Note: Full scale for CT Input is 3 x CT. Negative values (-) represent lead and positive values (+) represent lag.

Current Parameters: Phase A, Phase B, Phase C, Neutral, Ground, Sensitive Ground, Positive Sequence, Negative Sequence and Zero Sequence

Voltage Parameters:

Wye VTs: AN, BN, CN, Negative Sequence, Zero Sequence and Auxiliary
Delta VTs: AB, BC, CA, Negative Sequence, Zero Sequence and Auxiliary

VOLTS PER HERTZ (24)

| | |
|-----------------|--|
| Inputs: | Van (Wye VTs), Vab (Delta VTs) |
| Pickup Level: | 0.80 to 4.00 x V/Hz in steps of 0.01 x V/Hz |
| Dropout Level: | 97% to 98% of pickup |
| Level Accuracy: | ± 0.02 x V/Hz or 2% of set value, whichever is greater |
| Time Curves: | Definite Time, Inverse A/B/C, FlexCurves A/B |
| TD Multiplier: | 0.00 to 600.00 s in steps of 0.01 s |
| Reset Delay: | 0.00 to 600.00 s in steps of 0.01 s |
| Time Accuracy: | ± 3% of operate time of ±15 cycles (whichever is greater) for values greater than 1.1 x pickup |

PHASE/AUXILIARY/POSITIVE SEQUENCE UNDERVOLTAGE (27P, 27X, 27_1)

| | |
|----------------------|--|
| Minimum Voltage: | Programmable from 0.00 to 1.25 x VT in steps of 0.01 |
| Pickup Level: | 0.00 to 1.25 x VT in steps of 0.01 |
| Dropout Level: | 102% of pickup |
| Curve: | Definite Time, Inverse Time |
| Time Delay: | 0.00 to 600.00 s in steps of 0.01 |
| Operate Time: | Time delay ±30 ms @ 60Hz (V < 0.85 x PKP) Time delay ±40 ms @ 50Hz (V < 0.85 x PKP) |
| Time Delay Accuracy: | ±3% of expected inverse time or 1 cycle, whichever is greater |
| Level Accuracy: | Per voltage input |

PHASE/AUXILIARY/NEUTRAL/NEGATIVE SEQ OVERVOLTAGE (59P/59X/59N/59_2)

| | |
|----------------------|--|
| Pickup Level: | 0.00 to 1.25 x VT in steps of 0.01 |
| Dropout Level: | 98% of pickup |
| Time Delay: | 0.05 to 600.00 in steps of 0.01 |
| Operate Time: | Time delay ±35 ms @ 60Hz (V > 1.1 x PKP) Time delay ±40 ms @ 50Hz (V > 1.1 x PKP) |
| Time Delay Accuracy: | ±3% of expected inverse time or 1 cycle, |
| Level Accuracy: | Per voltage input |

BROKEN CONDUCTOR (46BC)

| | |
|-------------------------------------|--|
| Minimum operating positive current | 0.05 to 1.00 x CT in steps of 0.01 x CT |
| Maximum operating positive current: | 0.05 to 5.00 x CT in steps of 0.01 x CT |
| Pickup level: | 20.0% to 100.0% in steps of 0.1% |
| Dropout level: | 97% of pickup (pickup > 10) Pickup - 0.02 (pickup < 10) |
| Pickup time delay | 0.000 to 65.535 s in steps of 0.001 s |
| Timer accuracy | ± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate |
| Operate time | <30 ms at 60 Hz |

WATTMETRIC GROUND FAULT (32N)

| | |
|--------------------------|---|
| Measured power | zero sequence |
| Number of elements: | 1 |
| Characteristic angle: | 0° to 359° in steps of 1° |
| Pickup threshold: | 0.001 to 1.200 pu in steps of 0.001 pu |
| Pickup level accuracy: | ± 2% or ± 0.03 pu, whichever is greater |
| Dropout Level: | 97% of pickup (pickup > 0.1) Pickup - 0.002 (pickup < 0.1)97 |
| Pickup delay | Definite Time (0.00 to 600 .0 s in steps of 0.1 s), Inverse Time, or Flexcurve |
| Inverse time multiplier: | 0.01 to 2.00 in steps of 0.01 |
| Curve timing accuracy: | ± 3.5% of operate time or ± ¼ cycle (whichever is greater) from pickup to operate |
| Operate time: | <30 ms at 60 Hz |

DIRECTIONAL POWER (32)

| | |
|------------------------|--|
| Measured power: | 3-phase |
| Characteristic angle: | 0° to 359° in steps of 1° |
| Power pickup range: | -1.200 to 1.200 x Rated Power in steps of 0.001 |
| Pickup level accuracy: | 2.5% or 0.01 pu, whichever is greater |
| Hysteresis: | 2% of pickup |
| Pickup time delay: | 0.00 to 600 .0 s in steps of 0.1 s |
| Operate time: | < 55 ms at 1.1 x pickup at 60 Hz < 65 ms at 1.1 x pickup at 50 Hz |
| Timer accuracy: | ± 3% of delay setting or ± ¼ cycle (whichever is greater) from pickup to operate |

UNDERFREQUENCY (81U)

| | |
|----------------------|--------------------------------------|
| Minimum Voltage: | 0.00 to 1.25 x VT in steps of 0.01 |
| Pickup Level: | 40.00 to 70.00 Hz in steps of 0.01 |
| Dropout Level: | Pickup +0.05 Hz |
| Time Delay: | 0.10 to 600.0 s in steps of 0.01 |
| Time Delay Accuracy: | 0 to 6 cycles (Time Delay selected) |
| Operate Time: | Typically 10 cycles @ 0.1Hz/s change |
| Level Accuracy: | ±0.03 Hz |

Technical Specifications

OVERFREQUENCY (81O)

| | |
|----------------------|--------------------------------------|
| Minimum Voltage | 0.3 x VT |
| Pickup Level: | 40.00 to 70.00 Hz in steps of 0.01 |
| Dropout Level: | Pickup - 0.05 Hz |
| Time Delay: | 0.10 to 600.0 s in steps of 0.01 |
| Time Delay Accuracy: | 0 to 6 cycles (Time Delay selected) |
| Operate Time: | Typically 10 cycles @ 0.1Hz/s change |
| Level Accuracy: | ±0.03 Hz |

FUSE FAIL (VTFF)

| | |
|------------------|---------------|
| Time Delay: | 1 s |
| Timing Accuracy: | ±0.5 s |
| Elements: | Trip or Alarm |

TRANSIENT RECORDER

| | |
|------------------|--|
| Buffer size: | 3 s |
| No. of buffers: | 1, 3, 6 |
| No. of channels: | 14 |
| Sampling rate: | 4, 8, 16, or 32 samples per cycle |
| Triggers: | Manual Command Contact Input Virtual Input Logic Element Element Pickup/Trip/Dropout/Alarm |
| Data: | AC input channels Contact input state Contact output state Virtual input state Logic element state |
| Data storage: | RAM - battery backed-up |

FAULT RECORDER

| | |
|-------------------|---|
| Number of records | 1 |
| Content: | Date and Time, first cause of fault, phases, Currents: Ia, Ib, Ic, Ig/Isg, In - magnitudes and angles Voltages: Van, Vbn, Vcn, Vab, Vbc, Vca, Vaux - magnitudes and angles System frequency |

EVENT RECORDER

| | |
|-------------------|--|
| Number of records | 256 |
| Header: | relay name, order code, firmware revision |
| Content: | event number, date of event, cause of event, per-phase current, ground current, sensitive ground current, neutral current, per-phase voltage (VTs connected in "Wye"), or phase-phase voltages (VTs connected in "Delta"), system frequency, power, power factor, thermal capacity |
| Data Storage: | Retained for 3 days |

CLOCK

| | |
|---------|---|
| Setup: | Date and time Daylight Saving Time |
| IRIG-B: | Auto-detect (DC shift or Amplitude Modulated) Amplitude modulated: 1 to 10 V pk-pk DC shift: 1 to 10 V DC Input impedance: 40kOhm ± 10% Accuracy with IRIG-B: ± 1 ms Accuracy without IRIG-B: ± 1 min / month |

LOGIC ELEMENTS

| | |
|------------------------------------|--|
| Number of logic elements: | 16 |
| Trigger source inputs per element: | 2 to 8 |
| Block inputs per element: | 2 to 4 |
| Supported operations: | AND, OR, NOR, NAND, XOR, XNOR, Pickup / Dropout timers |
| Pickup timer: | 0 to 60000 ms in steps of 1 ms |
| Dropout timer: | 0 to 60000 ms in steps of 1 ms |

BREAKER CONTROL

| | |
|------------|--|
| Operation: | Asserted Contact Input, Logic Element, Virtual Input, Manual Command |
| Function: | Opens / closes the feeder breaker |

SYNCHROCHECK (25)

| | |
|------------------------------------|--|
| Dead/Live levels for Line and Bus: | 0 to 1.25 x VT in steps of 0.01 |
| Maximum voltage difference: | 10 to 10000 V in steps of 1 V |
| Maximum angle difference: | 2° to 80° in steps of 1° |
| Maximum frequency slip | 0.01 to 5.00 Hz in steps of 0.01 Hz |
| Breaker Closing time | 0.01 to 1.00 s in steps of 0.01 s |
| Dead Source function: | None (DL-DB) Dead Line-Dead Bus (LL-DB) Live Line-Dead Bus (DL-LB) Dead Line-Live Bus (AL-DB) Any Line-Dead Bus (DL-AB) Dead Line-Any Bus (OL-OD) One Live-Other Dead (NBL) Not Both Live |

AUTORECLOSE (79)

| | |
|---------------------|---|
| Reclose attempts: | Up to 4 shots |
| Time Delay Accuracy | 0 to 3 cycles (AR Dead Time selected) |
| Elements: | Inputs, Outputs, Breaker Status (52 status) |

SYNCHROCHECK SUPERVISION

| | |
|------------|---------------------------|
| Operation: | Automatically |
| Function: | Close breaker supervision |

SECOND HARMONIC INHIBIT

| | |
|----------------------|---|
| Operating Parameter: | Current 2nd harmonic per phase or average |
| Pickup Level: | 0.1% to 40.0% in steps of 0.1 |
| Minimum Current: | 0.03 to 3.00 x CT in steps of 0.01 x CT |
| Time Delay: | 0.00 to 600.00 s in steps of 0.01 s |
| Time Delay Accuracy: | ±3% of expected time or 2 cycle, whichever is greater |
| Level Accuracy: | ±2% or ±10mA (whichever is greater) |

BREAKER FAILURE (50BF)

| | |
|----------------------|--|
| Pickup Level: | 0.05 to 20.00 x CT in steps of 0.01 x CT |
| Timer 1 Delay: | 0.03 to 1.00 s in steps of 0.01 s |
| Timer 2 Delay: | 0.00 to 1.00 s in steps of 0.01 s |
| Dropout Level: | 97 to 98% of pickup |
| Time Delay Accuracy: | 0 to 1 cycle (Timer 1, Timer 2) |
| Level Accuracy: | per CT input |
| Reset Time: | <14 ms typical at 2 x pickup at 60 Hz <16 ms typical at 2 x pickup at 50 Hz |

BREAKER TRIP COUNTER

| | |
|------------------------------|--------------------------|
| Trip Counter Limit (Pickup): | 1 to 10000 in steps of 1 |
|------------------------------|--------------------------|

CT FAILURE

| | |
|-----------------------------|---|
| Inputs: | Neutral Current IN, Neutral Current VN (from three-phase VTs) Ground Current Ig |
| Time Delay: | 0.00 to 60.00 s in steps of 0.01 s |
| 3IO level accuracy: | per CT inputs |
| 3VO level accuracy: | per VT inputs |
| GND current level accuracy: | see the specifications for phase and ground current inputs |
| Operate Time: | 30 ms at 60 Hz 35 ms at 50 Hz |

COLD LOAD PICKUP BLOCKING

| | |
|----------------------|--|
| Operation: | Automatically (current level), or by command (asserted input) |
| Function: | Block IOC functions, raise TOC pickup, for selected period of time |
| Time Delay Accuracy: | 0 to 1 cycle (block Time) ±50 ms (outage time ≤5 min) ±1 s (outage time > 5 min) |

AMBIENT TEMPERATURE

| | |
|--------------------------|----------------------------------|
| High Temperature Pickup: | 20°C to 80°C in steps of 1°C |
| Low Temperature Pickup: | -40°C to 20°C in steps of 1°C |
| Time Delay: | 1 to 60 min in steps of 1 min |
| Temperature Dropout: | Configurable 90 to 98% of pickup |
| Temperature Accuracy: | ±10°C |
| Timing Accuracy: | ±1 second |

BREAKER HEALTH

| | |
|-----------------|--|
| Timer Accuracy: | ± 3% of delay setting or ± 1 cycle (whichever is greater) from pickup to operate |
|-----------------|--|

DEMAND

| | |
|------------------------------|--|
| Measured Values: | Phase A/B/C present and maximum current, three-phase present and maximum real/reactive/apparent power |
| Measurement Type: | Thermal Exponential, 90% response time (programmed): 5, 10, 15, 20, 30 minutes Block Interval / Rolling Demand, time interval (programmed): 5, 10, 15, 20, 30 minutes |
| Current Pickup Level: | 10 to 10000 in steps of 1 A |
| Real Power Pickup Level: | 0.1 to 300000.0 in steps of 0.1 kW |
| Reactive Power Pickup Level: | 0.1 to 300000.0 in steps of 0.1 kVar |
| Apparent Power Pickup Level: | 0.1 to 300000.0 in steps of 0.1 kVA |
| Dropout Level: | 96-98% of Pickup level |
| Level Accuracy: | ± 2% (current demand only) |

CONTACT INPUTS

| | |
|--|--|
| Inputs: | 10 |
| Selectable: | 17, 33, 84, 166 VDC |
| thresholds: | ±10% |
| Recognition time: | 1/2 cycle |
| Debounce time: | 1 to 64 ms, selectable, in steps of 1 ms |
| Maximum input voltage & continuous current draw: | 300 VDC, 2 mA, connected to Class 2 source |
| Type: | opto-isolated inputs |
| External switch: | wet contact |

PHASE & GROUND CURRENT INPUTS

| | |
|--------------------|---|
| CT Primary: | 1 to 6000 A |
| Range: | 0.02 to 20 × CT |
| Input type: | 1 A or 5 A (must be specified with order) |
| Nominal frequency: | 50/60 Hz |
| Burden: | <0.1 VA at rated load |
| Accuracy: | ±3% of reading from 0.2 to 20 × CT +/- 10 mA or ±20% of reading from 0.02 to 0.19 × CT, whichever is greater |
| CT withstand: | 1 second at 100 A (1 A option) 1 second at 400 A (5 A or universal CT option) 2 seconds at 40 × rated current continuous at 3 × rated current |

SENSITIVE GROUND CURRENT INPUT

| | |
|--------------------|--|
| CT Primary: | 1 to 600 A |
| Range: | 0.002 to 3 × CT |
| Input type: | 1 A or 5 A (must be specified with order) |
| Nominal frequency: | 50/60 Hz |
| Burden: | <0.1 VA at rated load |
| Accuracy: | ±3% of reading from 0.02 to 3 × CT +/- 10 mA or ±20% of reading from 0.02 to 0.19 × CT, whichever is greater |
| CT withstand: | 1 second at 100 A (1 A option) 1 second at 400 A (5 A or universal CT option) 2 seconds at 40 × rated current continuous at 3 × rated current |

PHASE/AUX VOLTAGE INPUTS

| | |
|--------------------|------------------------------|
| Source VT: | 0.15 to 550 kV / 50 to 220 V |
| VT secondary: | 50 to 240 V |
| VT ratio: | 1.0 to 5000 in steps of 0.1 |
| Nominal frequency: | 50/60 Hz |
| Relay burden: | <0.25 VA at 120 V |
| Accuracy: | ±1.0% of reading |
| Voltage withstand: | 260 VAC continuous |

RATINGS PER UL CERTIFICATION:

| | |
|-----------------------|----------------|
| Break (AC resistive): | 250 VAC / 10 A |
| Continuous Current: | 10A |

FORM-A RELAYS

| | |
|-----------------------------------|---|
| Configuration: | 2 (two) electromechanical |
| Contact material: | silver-alloy |
| Operate time: | <8 ms |
| Continuous current: | 10 A |
| Make and carry for 0.2s: | 30 A per ANSI C37.90 |
| Break (DC inductive, L/ R=40 ms): | 24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A |
| Break (DC resistive): | 24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A |
| Break (AC inductive): | 720 VA @ 250 VAC Pilot duty A300 |
| Break (AC resistive): | 277 VAC / 10 A |

FORM-A VOLTAGE MONITOR

| | |
|---------------------|---------------|
| Applicable voltage: | 20 to 250 VDC |
| Trickle current: | 1 to 2.5 mA |

FORM-C RELAYS

| | |
|--------------------------------------|-----------------------------|
| Configuration, Arc Flash option: | 3 (three) electromechanical |
| Configuration, Non-Arc Flash option: | 5 (five) electromechanical |
| Contact material: | silver-alloy |
| Operate time: | <8 ms |

FORM-C RELAYS

| | |
|-----------------------------------|---|
| Continuous current: | 10 A |
| Make and carry for 0.2s: | 30 A per ANSI C37.90 |
| Break (DC inductive, L/ R=40 ms): | 24 V / 1 A 48 V / 0.5 A 125 V / 0.3 A 250 V / 0.2 A |
| Break (DC resistive): | 24 V / 10 A 48 V / 6 A 125 V / 0.5 A 250 V / 0.3 A |
| Break (AC inductive): | 720 VA @ 250 VAC Pilot duty A300 |
| Break (AC resistive): | 250 VAC / 10 A |

RELAYS RATINGS PER UL CERTIFICATION

| | |
|-----------------------|----------------|
| Break (AC resistive): | 250 VAC / 10 A |
| Continuous Current: | 10 A |

SOLID STATE CONTACT, ARC FLASH OPTION

| | |
|---------------------------------|-------------|
| Configuration: | 2 MOSFET |
| Operate time: | 60 μs |
| Continuous current: | 6 A |
| Make and carry for 1 s: | 10 A |
| Break (DC resistive): | 300 V / 6 A |
| Break (DC inductive L/ R=40ms): | 300 V / 6 A |

SOLID STATE CONTACT RATINGS PER UL CERTIFICATION

| | |
|---------------------|--|
| Break: | 24 VDC, 1 A Pilot Duty 48 VDC, 0.5 A Pilot Duty 125 VDC, 0.3 A Pilot Duty 250 VDC, 0.2 A Pilot Duty |
| Continuous Current: | 6 A |

TRIP / CLOSE SEAL-IN

| | |
|------------------------|---------------------------------|
| Relay 1 trip seal-in: | 0.00 to 9.99 s in steps of 0.01 |
| Relay 2 close seal-in: | 0.00 to 9.99 s in steps of 0.01 |

HIGH RANGE POWER SUPPLY

| | |
|--------------------|---|
| Nominal: | 120 to 240 VAC 125 to 250 VDC |
| Range: | 60 to 300 VAC (50 and 60 Hz) 84 to 250 VDC |
| Ride-through time: | 35 ms |

LOW RANGE POWER SUPPLY

| | |
|----------|--------------|
| Nominal: | 24 to 48 VDC |
| Range: | 20 to 60 VDC |

Technical Specifications

ALL RANGES

| | |
|--------------------|--|
| Voltage withstand: | 2 × highest nominal voltage for 10 ms |
| Power consumption: | 15 W nominal, 20 W maximum 20 VA nominal, 28 VA maximum |
| Fuse rating: | 5A fuse; time lag, slow blow, 350V 4.5 O.D. X 14.5mm |

SERIAL

| | |
|-------------------|--------------------------------------|
| RS485 port: | Opto-coupled |
| Baud rates: | up to 115 kbps |
| Response time: | 1 ms typical |
| Parity: | None, Odd, Even |
| Maximum Distance: | 1200 m (4000 feet) |
| Isolation: | 2 kV |
| Protocol: | Modbus RTU, DNP 3.0, IEC 60870-5-103 |

ETHERNET (COPPER)

| | |
|------------|---|
| Modes: | 10/100 MB (auto-detect) |
| Connector: | RJ-45 |
| Protocol: | Modbus TCP/IP, DNP 3.0, IEC 60870-5-104, IEC 61850 GOOSE, IEC 61850, OPC-UA |

ETHERNET (FIBER)

| | |
|---------------------------------------|--|
| Fiber type: | 100 MB Multi-mode |
| Wavelength: | 1300 nm |
| Connector: | MTRJ |
| Transmit power: | -20 dBm |
| Receiver sensitivity: | -31 dBm |
| Power budget: | 9 dB |
| Maximum input power: | -11.8 dBm |
| Typical distance: | 2 km (1.25 miles) |
| Duplex: | half/full |
| Protocol: | Modbus TCP, DNP3.0, IEC 60870-5-104, IEC 61850 GOOSE, IEC 61850, OPC-UA, PRP, HSR, LLA |
| Maximum number of TCP/IP sessions: | 3 |

USB

| | |
|-------------------------|------------------------|
| Standard specification: | Compliant with USB 2.0 |
| Data transfer rate: | 115 kbps |

OPC-UA (OLE FOR PROCESS CONTROL - UNIFIED ARCHITECTURE)

| | |
|-------------|---|
| DA Server: | Transmission of real-time data to Clients |
| A&E Server: | Transmission of Event information to Clients. Acknowledge and confirmation permitted from Client side |

CERTIFICATION

| | Applicable council directive | According to |
|------------------|---|------------------------------------|
| | Low voltage directive | 2014/35/EU |
| CE complyce | EMC Directive | 2014/30/EU UL 508 |
| North America | cULus | UL 1053 C22.2 No 14 |
| EAC | Machines and Equipment | TR CU 010/2011 |
| LLoyd's Register | Rules and Regulations for the Classifications of Ships | Marine Applications: ENV2, ENV3 |
| ISO | Manufactured under a registered quality program | ISO9001 |

EAC

The EAC Technical Regulations (TR) for Machines and Equipment apply to the Customs Union (CU) of the Russian Federation, Belarus and Kazakhstan

| | |
|--|--|
| Country of origin | Spain or Canada; see label on the unit |
| Date of manufacture | See label on the side of the unit |
| Declaration of Conformity and/or Certificate of Conformity | Available upon request |

| TEST | REFERENCE STANDARD | TEST LEVEL |
|----------------------------------|--|---|
| Dielectric voltage withstand | | |
| High voltage power supply* | 60255-27 | 2200 VAC for one second |
| Low voltage power supply* | 60255-27 | 550 VAC for one second |
| Impulse voltage withstand | EN60255-27 | 5kV |
| Damped oscillatory | IEC 60255-26 / IEC61000-4-18 | 2.5kV CM, 1 kV DM |
| Electrostatic discharge | IEC 60255-26 / IEC 61000-4-2 | 15 kV / 8 kV |
| RF immunity | IEC 60255-26 / IEC 61000-4-3 | 80 MHz- 1 GHz, 1.4 Ghz-2.7Ghz, 10 V/m |
| Fast Transient Disturbance | IEC 60255-26 / IEC 61000-4-4 | 2 or 4 kV |
| Surge Immunity | IEC 60255-26 / IEC 61000-4-5 | 0.5, 1 & 2 kV |
| Conducted RF Immunity | IEC 60255-26 / IEC 61000-4-6 | 150 KHz-80 MHz, 26-68 MHz, 10V/m |
| Voltage interruption & Ripple DC | IEC 60255-26 / IEC 61000-4-11 | 15% ripple, 200ms interrupts |
| Radiated & Conducted Emissions | CISPR11 / CISPR22/ IEC 60255-26: Section 7.1.2 & 7.1.3 | Class A |
| Sinusoidal Vibration | IEC 60255-21-1 | Class 1 |
| Shock & Bump | IEC 60255-21-2 | Class 1 |
| Seismic | IEC 60255-21-3 | Class 2 |
| Power magnetic Immunity | IEC 60255-26 / IEC 61000-4-8 | 1000 A/m, 100 A/m, 30A/m 300 A/m |
| Voltage Dip & interruption | IEC 60255-26 / IEC 61000-4-11 | 0, 40, 70, 80% dips, 250/300 cycle interrupts |
| Power frequency | IEC 60255-26 / IEC 61000-4-16 | Level 4 |
| Voltage Ripple | IEC 60255-26 / IEC 61000-4-17 | 15% ripple |
| Ingress Protection | IEC 60529 | IP54 front, IP10 Back |
| Environmental (Cold) | IEC 60068-2-1 | -40°C 16 hrs |
| Environmental (Dry heat) | IEC 60068-2-2 | 85°C 16hrs |
| Relative Humidity Cyclic | IEC 60068-2-30 | 6 day variant 2 |
| EFT | IEEE / ANSI C37.90.1 | 4KV, 2.5Khz |
| Damped Oscillatory | IEEE / ANSI C37.90.1 | 2.5KV, 1Mhz |
| RF Immunity | IEEE / ANSI C37.90.2 | 35V/m (max field), (80 MHz-1 GHz with 1 KHz sine and 80% AM modulation) |

| TEST | REFERENCE STANDARD | TEST LEVEL |
|--------|----------------------|-----------------|
| ESD | IEEE / ANSI C37.90.3 | 8KV CD/ 15KV AD |
| | UL 508 | e83849 NKCR |
| Safety | UL C22.2-14 | e83849 NKCR7 |
| | UL 1053 | e83849 NKCR |

* Test level is based on basic insulation principle
(Power supply I/P terminals tested to Chassis ground).

DIMENSIONS

Size: Refer to Dimensions section

WEIGHT

NON-DRAWOUT UNIT

Weight (net): 2.9 kg (6.4 lbs)

Weight (gross): 4.0 kg (8.6 lbs)

DRAWOUT UNIT

Weight (net): 3.9 kg (8.6 lbs)

Weight (gross): 5.0 kg (11.0 lbs)

OPERATING ENVIRONMENT

Ambient operating temperature: -40°C to +60°C [-40°F to +140°F]

Ambient storage / shipping temperature: -40°C to +85°C [-40°F to +185°F]

Humidity: Operating up to 95% (non condensing) @ 55C (As per IEC 60068-2-30 Variant 2, 6days)

Altitude: 2000m (max)

Pollution degree: II

Overvoltage category: III

Ingress Protection: IP54 Front , IP10 back (IP20 cover is available for drawout version)

Noise: 0 dB

Ordering

| | 350 | - | * | * | * | * | * | * | * | * | * | * | * | * | * | Description |
|---------------------------------|-----|---|----------------------|--|--------|--------|-------------|--------|---|-------------------------------|-------------------------------|--------|---|---|---|--|
| Interface | 350 | | | | | | | | | | | | | | | 350 Feeder Protection System |
| Language ^a | | E | | | | | | | | | | | | | | English without programmable LEDs English with programmable LEDs |
| Phase Currents ^b | | | PX P0 P1 P5 | | | | | | | | | | | | | No CT 1 A or 5 A configurable phase current inputs 1 A 3-phase current inputs 5 A 3-phase current inputs |
| Ground Currents ^c | | | | GX G0 G1 G5 S0 S1 S5 | | | | | | | | | | | | No CT 1 A or 5 A configurable ground current inputs 1 A ground current input 5 A ground current input 1 A or 5A configurable sensitive ground current inputs 1 A sensitive ground current input 5 A sensitive ground current input |
| Power Supply | | | | | L H | | | | | | | | | | | 24 to 48 V DC 125 to 250 V DC/120 to 240 V AC |
| Input/Output | | | | | | E A | | | | | | | | | | 10 Inputs, 7 Outputs (2 Form A, 5 Form C) Arc Flash: 10 Inputs, 5 Outputs (2 Form A, 3 Form C), 2 SSRs, 4 Light Sensor Inputs |
| Current Protection ^d | | | | | | | N E M | | | | | | | | | None (voltage and frequency relay, requires a PX/GX configuration) Extended configuration: 49, 50P(2), 50G/SG(2), 50N(2), 51P(1), 51G/SG(1), 51N(1) Advanced configuration: Extended + 51_2 or 46(1), 50_2 (1) or 46(1), 11/2(46BC) |
| Control | | | | | | | | N C | | | | | | | | CLP, Lockout (86) CLP, 50BF, Lockout (86), Autoreclose (79) |
| Other Options | | | | | | | | | N V D M R P W | | | | | | | No selection 27P(4), 27X(1), 27P_1(1), 59P(4), 59N(4), 59X(1), 59_2(2), 81O(4), 81U(4), 25(1), VTFF(1), 24(1), Voltage Metering (requires a PX/GX configuration) Neutral and Ground Directional Overcurrent Protection: 67N(1), 67G/SG(1), 60CTS Voltage, Power, and Energy Metering, 60CTS Phase, Neutral, and Ground Directional Overcurrent Protection: 67P(1), 67N(1), 67G/SG(1), 32N(2), VTFF + Voltage, Power, and Energy Metering, 60CTS Extended Protection: 27P(2), 27X(1), 27P_1 (1), 59P(2), 59N(1), 59X(1), 59_2(1), 81O(2), 81U(2), 67P(1), 67N(1), 67G/ SG(1), VTFF(1), + Voltage, Power, and Energy Metering, 25(1), 60CTS Advanced Protection: Extended + 32(2) |
| Communications ^e | | | | | | | | | | S 1 3 4 5 | N E E E E | | | | | Standard: Front USB, Rear RS485: Modbus RTU, DNP3.0, IEC60870-5-103 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850, OPC-UA Standard + Ethernet (Dual Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850, OPC-UA, PRP, HSR, 1588 |
| Case Design | | | | | | | | | | | D N X | | | | | Protection Relay with drawout design Protection Relay with non-drawout design Protection Relay (drawout design) with no chassis |
| Harsh Environment | | | | | | | | | | | | N H | | | | None Harsh Environment Conformal Coating |

Ordering Notes:

- Phase current options "PX/P0" and Ground current options "GX/G0" are only available with the non-drawout Case Design "N".
- Ground currents "G1/G5" and "S1/S5" must match the corresponding "P1/P5" Phase currents (i.e. 5A and 1A must not be mixed). Ground current "GX" must match the "PX" Phase current, and is only available with the non-drawout Case Design "N"; Current protection "N"; other options "V" and inputs/outputs = "E" Ground current "G0/S0" must match the "P0" Phasecurrent, and is only available with the non-drawout Case Design "N".
- Current protection option "S" has been discontinued.
- Communications option "4E" allows the selection of either IEC 61850 or OPC-UA; both cannot be used at the same time.
- Communications option "5E" is only available with the drawout Case Design "D" or "X".
- Arc Flash option "A" is only available with case design "N". Not available in PXGX configurations

Note:


Refer to the instruction manual for arc flash sensors and accessories.

| Multilin 350 | CH | * | * | * | * | * | * | * | Description |
|------------------------------|----------------------|---|---|------------------------------------|---------------------------|---|---|---|---|
| Phase Currents | P1 P5 | | | | | | | | 1 A 3-phase CTs (Winding 1 - 1 A, Winding 2 - 1 A) 5 A 3-phase CTs (Winding 1 - 5 A, Winding 2 - 5 A) |
| Ground Currents ^a | G1 G5 S1 S5 | | | | | | | | 1 A standard ground CTs (Winding 1 - 1 A, Winding 2 - 1 A) 5 A standard ground CTs (Winding 1 - 5 A, Winding 2 - 5 A) 1 A sensitive ground CTs (Winding 1 - 1 A, Winding 2 - 1 A) 5 A sensitive ground CTs (Winding 1 - 5 A, Winding 2 - 5 A) |
| Other Options | | | | N D M R P W | | | | | No selection Neutral and Ground Directional Overcurrent Protection: 67N(1), 67G/SG(1), 60CTS Voltage, Power, and Energy Metering, 60CTS Phase, Neutral, and Ground Directional Overcurrent Protection: 67P(1), 67N(1), 67G/SG(1), 32N(2), VTFF + Voltage, Power, and Energy Metering, 60CTS Extended Protection: 27P(2), 27X(1), 27P_1 (1), 59P(2), 59N(1), 59X(1), 59_2(1), 81O(2), 81U(2), 67P(1), 67N(1), 67G/SG(1), VTFF(1), 25(1), 60CTS, Voltage, Power, and Energy Metering Advanced Protection: Extended + 32(2) |
| Communications ^b | | | | S 1 3 4 5 | N E E E E | | | | Standard: Front USB, Rear RS485: Modbus RTU, DNP3.0, IEC60870-5-103 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850 Standard + Ethernet (Copper & Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850, OPC-UA Standard + Ethernet (Dual Fiber - MTRJ), Modbus TCP/IP, DNP3.0, IEC 60870-5-104, IEC 61850, OPC-UA, PRP, HSR, 1588 |
| Harsh Environment | | | | | N H | | | | None Harsh Environment Conformal Coating |

a. Ground current options "G1/G5" must match the corresponding "P1/P5" Phase currents

b. Communications option "4E" allows the selection of either IEC 61850 or OPC-UA; both cannot be used at the same time.

Loop Sensor

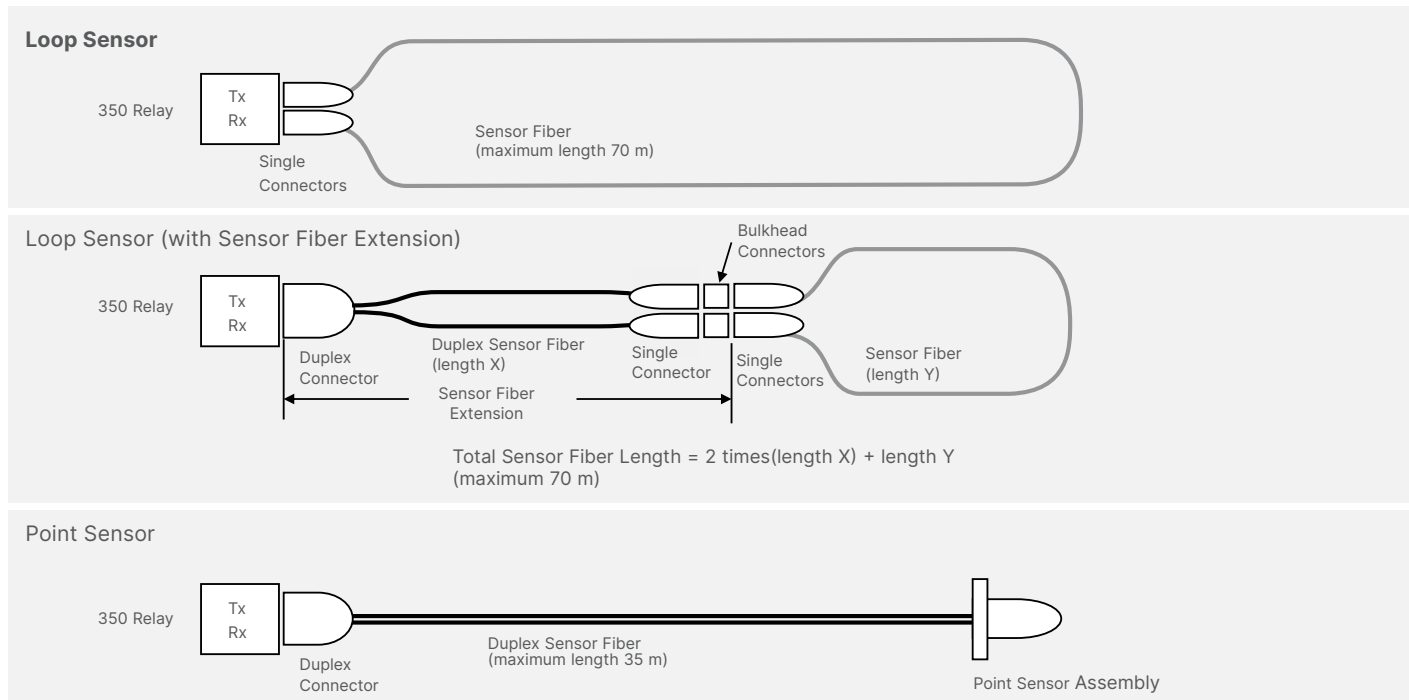

| AFC | - | * | * | * | Description |
|---------------------|----|---|---|---|--|
| AF System Component | E | | | | Sensor Fiber Extension (black sensor fiber with two single bulkhead connectors, used with loop sensors) |
| | L | | | | Loop Sensor with transparent sensor fiber |
| | P | | | | Point Sensor with black sensor fiber |
| Sensor Fiber Length | XX | | | | Sensor fiber length: 01 to 35 meters for Point Sensors and Extensions 01 to 70 meters for Loop Sensors |

Note: The length of the sensor fiber extension is duplex (double the path), and the total length of transparent fiber loop sensor and sensor fiber extension cannot exceed 70m; i.e. $xx + (2 \times YY) \leq 70$. For example, a loop sensor with a 25 meter transparent sensor fiber plus a sensor fiber extension of 10 meters would have a total of $2 \times 10m + 25m = 45m$ of single sensor fiber.

| RELATED PRODUCTS / ACCESSORIES | |
|---|-----------------|
| MultiSync 100 - GPS Clock | MultiSync100-P |
| 350 Retrofit Kit For 735 | 1819-0103 |
| 350 Retrofit Kit For IAC Relay: | 1819-0102 |
| 350 Retrofit Kit For MDP Relay | 1819-0101 |
| 350 Retrofit Kit For S1/S2 Cut-Out | 1819-0100 |
| SR3 Depth reducing collar - 1.375" | 18L0-0076 |
| SR3 Depth reducing collar - 3.00" | 18L0-0075 |
| SR3 IP20 Kit | 18L0-0080 |
| SR3 Non-drawout Straight Terminal Block Kit | 3S-NDO-STCONKIT |
| USB A-B configuration cable (6') | 0804-0458 |

Note: refer to the instruction manual for relay without chassis order codes.

For more information, visit
gevernova.com/grid-solutions

IEC is a registered trademark of Commission Electrotechnique Internationale.
 IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc.
 Modbus is a registered trademark of Schneider Automation. NERC is a registered trademark of North American Electric Reliability Council. ANSI is a registered trademark of American National Standards.

GE Vernova reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

