


MODEL JVM-3

Indoor Voltage Transformer

2400 V to 4,800 V,
BIL 60 kV, 50/60 Hz

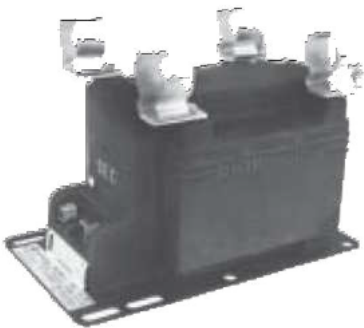

JVM-2 Voltage Transformer (two-fuse design)

Application

Designed for indoor service; suitable for operating meters, instruments, relays, and control devices.

Regulatory Agency Approvals

UL Recognized File E178265

Thermal Rating (Volt-Amperes)

55 °C Rise above 30°C Ambient..... 750
55 °C Rise above 30°C Ambient..... 500

Weight

(approximate, in pounds)

Unfused35/30
With Fuses38/33

Reference Drawings

Accuracy Curve..... 9689241268
Excitation Curve..... 5454043

Outline Drawings:

Unfused 8949739
One/Two Fuse; -040 and -042.....9926292
One Fuse; -033, -31, -32 8949740
Two Fuse; -024, -18, -19..... 8949741
Wiring Diagram..... refer to page 42, figure 5

Accessories - Catalog Number

Fuses:
2,400 Volt Class, 1 Ampere.....9F60AAB001
4,800 Volt Class, 1 Ampere.....9F60BBD001
4,800 Volt Class, 0.5 Ampere 9F60BBD905
Secondary Terminal Conduit Box9925183001





JVM-3 Data Table

LINE-TO-LINE CIRCUIT VOLTAGE FOR PERMISSIBLE PRIMARY CONNECTION			TRANSFORMER RATING ⁽¹⁾		ANSI ACCURACY CLASSIFICATION, 60 Hz				PRIMARY FUSE RATINGS	
Δ	Y	Y ONLY	PRIMARY VOLTAGE	RATIO	OPERATED AT RATED VOLTAGE	OPERATED AT 58% OF RATED VOLTAGE	BURDEN IMPEDANCE AT RATED VOLTAGE, BUT OPERATED AT 58 % RATED VOLTAGE ⁽²⁾	CATALOG NUMBER ⁴	Amps	VOLTS
Unfused										
2,400	2,400	4,160	2,400	20:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021001	----	----
4,200	4,200	----	4,200	35:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021002	----	----
4,800	4,800	----	4,800	40:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021003	----	----
With One Primary Fuse										
----	----	2,400	2,400	20:1	----	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021042	1 A	2,400
----	----	4,160	2,400	20:1	0.3 W, X, M, Y; 1.2 Z	----	----	763X021033	1 A	4,800
----	----	4,200	4,200	35:1	----	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021031	0.5 A	4,800
----	----	4,800	4,800	40:1	----	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021032	0.5 A	4,800
With Two Primary Fuses										
2,400	----	2,400 ⁽³⁾	2,400	20:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021040	1 A	2,400
----	----	4,160	2,400	20:1	0.3 W, X, M, Y; 1.2 Z	----	----	763X021024	1 A	2,400
4,200	----	4,200 ⁽³⁾	4,200	35:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021018	0.5 A	4,800
4,800	----	4,800 ⁽³⁾	4,800	40:1	0.3 W, X, M, Y; 1.2 Z	0.3 W, X; 1.2 M, Y	0.3 W', X', M', Y'; 1.2 Z	763X021019	0.5 A	4,800

Notes:

1. For continuous operation, the transformer-rated primary voltage should not be exceeded by more than 10%. Under emergency conditions, over-voltage must be limited to 1.25 times the transformer primary-voltage rating.
2. Operated at 58 % of Rated Voltage; the prime symbol (') is used to signify that these burdens do not correspond to standard ANSI definitions.
3. For Y connections, it is preferred practice to connect one lead from each voltage transformer directly to the grounded neutral, using a fuse only in the line side of the primary. By this connection a transformer can never be "alive" from the line side by reason of a blown fuse on the grounded side.
4. Measurement Canada Approval: AE-0372

JVM-3 Dimensions

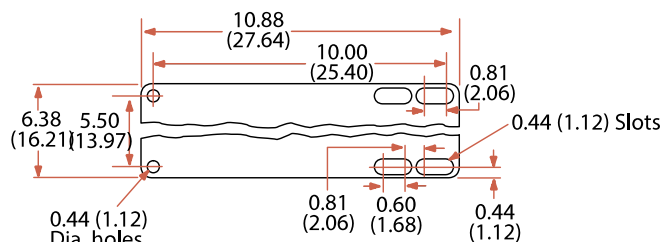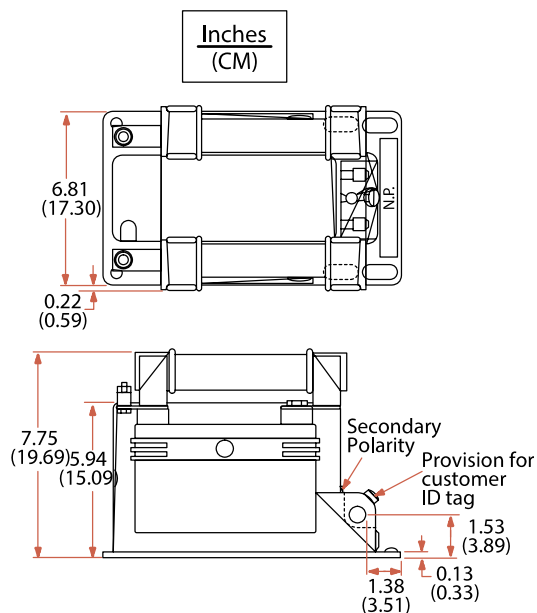

JVM-3 Mechanical Dimensions

Construction and Insulation

Please refer to General Product Information, item 1.8.

Core

Please refer to General Product Information, item 2.3.

Coils

Please refer to General Product Information, item 3.8.

Primary Terminals

Please refer to General Product Information, item 4.2.

Fuses

Current-limited, Type EJ-1 fuses are used.

Secondary Terminals

Please refer to General Product Information, item 4.12.

Polarity

Please refer to General Product Information, item 7.2.

Baseplate and Mounting

Please refer to General Product Information, item 5.5.

Nameplate

Please refer to General Product Information, item 6.5.

Maintenance

Please refer to General Product Information, item 10.1 and pages 24-27.

For more information, visit
gevernova.com/grid-solutions

GE Vernova reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50480
English
250910