

# P50 AGILE P153

## Compact Feeder Protection Relay

The Agile P153 protection relay is the most compact offering from GE Vernova's P50 Agile series serving the distribution and industrial markets.

The compact P153 relays are the ideal choice for primary or back up protection and monitoring of feeders deployed in medium and low voltage applications.

The P153 offers non-directional overcurrent and earth-fault protection, with its functions designed to cover a wide range of applications in the protection of cables and overhead lines deployed in industrial installations, public distribution networks, and substations.

The P153 relays offer supervision features such as measurement, monitoring and recording functions. Communication protocols available are site selectable for transmitting relay data to a supervisory control system via communication networks. The operator interface allows reading of measured values and simple configuration of the relay. The setting software facilitates configuration and access to all the stored information for monitoring, maintenance and troubleshooting purposes. P153 relays are housed in a robust metal case suitable for panel mounting.

### Applications

#### Feeder Protection for:

- Cables and Overhead lines deployed in MV/LV networks
- Backup in MV systems
- MV industrial installations, public distribution networks and substations



### Protection and Control

- Optimised protection for feeder applications
- Measurement / protection / monitoring in one box
- Continuous self-diagnostics

### Monitoring and Metering

- Metering for feeder applications including phase and neutral current, thermal state, positive and negative sequence current
- Circuit Breaker monitoring including operation counter, trip counter, operating time, and trip circuit supervision

### Communications

- Front USB port for local communication
- Rear RS485 port for SCADA communication
- Flexible SCADA communication options supporting Modbus / IEC 60870-5-103 (user selectable)

### Application Flexibility

- Standardised offering with minimum hardware variants
- CT 1 A/5 A selection by wiring
- Easy installation in panels thanks to compact form factor: 114 mm (H) x 137 mm (W) x 170.5 mm (D)
- Simple configuration and easy setup from front HMI



GE VERNOVA

## Measurements

- Metering of Phase currents
- Metering of Neutral currents-derived and measured
- Measurement of thermal state
- Positive and negative sequence current
- Ratio of negative to positive sequence current
- Breaker operation counter
- Breaker trip counter
- Breaker operating time

## Protection and Control

### General

- Timed and instantaneous phase and earth fault protection (3 independent stages)
- Wide range of IEC/IEEE curves
- Thermal overload
- Cold load pickup
- Inrush blocking
- Undercurrent/Loss of load detection
- Negative sequence overcurrent
- Broken conductor
- Circuit breaker fail
- Trip circuit supervision
- 4 Digital inputs
- 4 Digital outputs
- 1 A / 5 A CTs selection
- Latching of output contacts
- 2 Setting groups
- Password protection
- Self-supervision & internal diagnostics

### Recording and Fault Analysis

- Up to 5 fault records
- Up to 512 time tagged event records
- Up to 5 disturbance records


## Functional Overview

ANSI	FUNCTION OVERVIEW		FEEDER
	<b>Protection</b>		<b>P153</b>
50	Definite time overcurrent		•
50N	Neutral/Earth definite time overcurrent		•
51	IDMT overcurrent		•
51N	Neutral/Earth IDMT overcurrent		•
68	Inrush blocking		•
49	Thermal overload		•
37	Undercurrent detection/Loss of load		•
46	Negative sequence overcurrent		•
46BC	Broken conductor		•
50BF	Circuit breaker fail		•
CLP	Cold load pick-up		•
86	Latching of output contacts (Lock out)		•
	<b>Control Functions</b>		
74	Trip circuit supervision		•
	Watchdog function, Self monitoring & diagnostics		•
	Test/ Commissioning facilities		•
	<b>HMI</b>		
	Back-lit LCD display		•
	6 x Touch keys/6 x Status LEDs		•
	<b>Communication</b>		
	USB port		•
	Mod bus/IEC 60870-5-103 (RS485)		•
	<b>Digital Input/Output</b>		
	Digital Input/Output		4/4
	<b>Analogue input</b>		
	Phase current input	3× 1 ph	•
	Earth current input	1× 1 ph	•
	<b>General</b>		
	Setting groups		2
	Measurements		•
	Event/Fault records		•
	Disturbance records		•
	Configurable digital I/O and LEDs		•
	<b>Hardware</b>		
	Auxiliary supply		24-50 VDC or 100-230 VAC/VDC
	Climatic conditions		Operating:- 25°C to +55°C Storage: -25°C to + 70°C
	Housing		Front IP52
			Rear IP20

• Standard

## Relay Configuration Software


(For Setting, Viewing and Parameterisation)

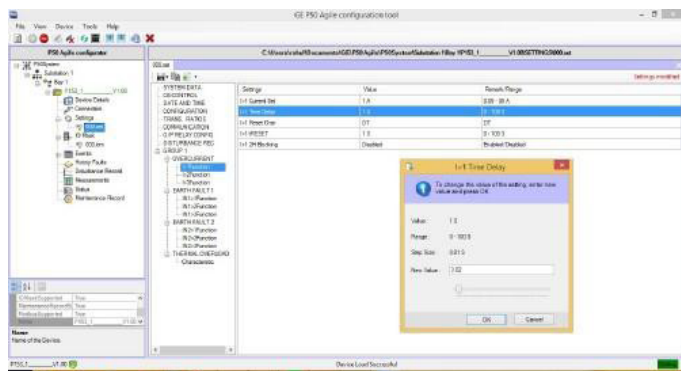

## Digital Inputs / Outputs / LED Assignment

P153 supports 4DI/4DO and 2 programmable LEDs. Operators can assign any of the logical/ physical statuses to DI/DO and programmable LEDs. This provides user the flexibility to program the relay as per the application requirements.

All the output contacts can be configured as SR (self-reset) or HR (hand reset) through the I/O configuration setting from the front panel or through relay setting software.

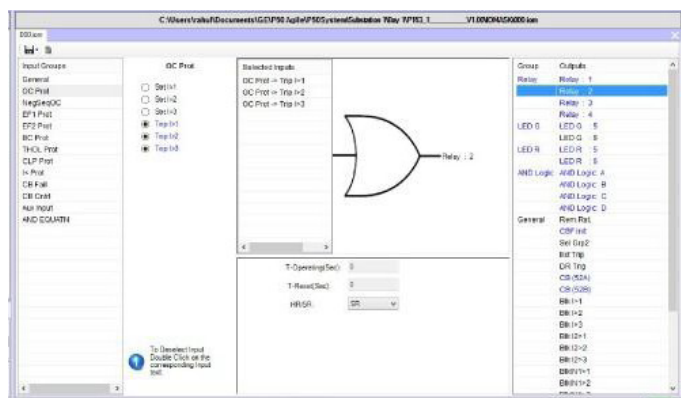

## Front Panel Interface

- Six LEDs for status indication
- Back-Lit LCD display (16×2)
- Six keys for setting and interrogation



P153 Front Panel

## Logic Equations

P153 supports up to 4 independent Boolean equations. Each equation offers the possibility to use an AND logical gate. The result of the equation can be time delayed, reused in another equation and assigned to any output relays, trip, trip latching and/or HMI LEDs. This function facilitates customisation of the product based on the customer's application.

## Circuit Breaker Command

P153 supports a menu option to allow the operator to issue open/close command to the circuit breaker through the relay HMI.

## Communications


- Front USB port for viewing, parameter setting, downloading
- Rear RS485 port for SCADA communication
- Multiple protocol - Modbus / IEC 60870-5-103 (user selectable)

## Commissioning

P153 provides facility to test relay operation during commissioning/maintenance activity. Facilities include:

- Digital inputs /outputs status monitoring
- Test mode- allows secondary injection testing to be performed on the relay without operation of the trip contacts
- Digital output contacts test
- LED test

## Typical Wiring

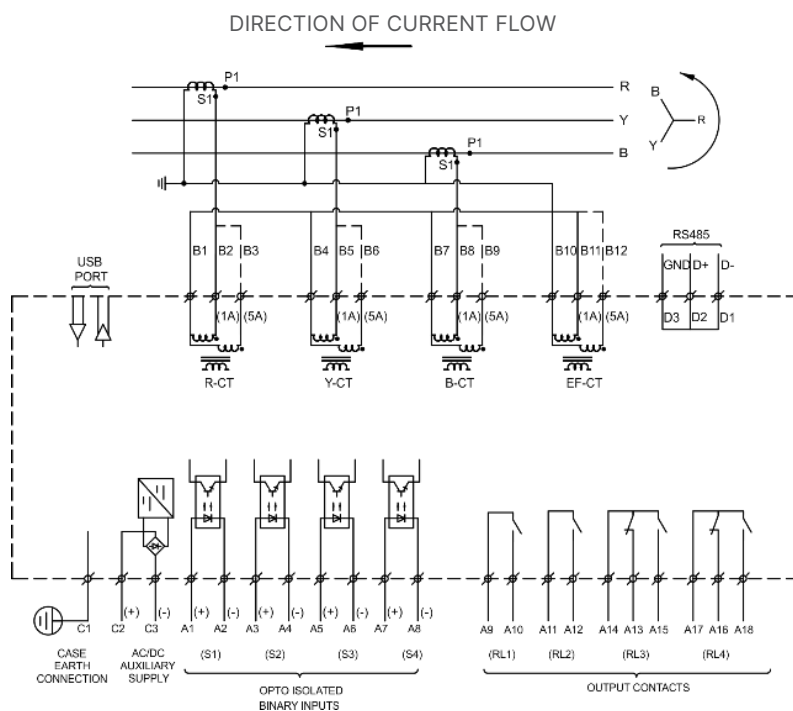

## P50 Agile Family

P15D	Dual Powered Overcurrent relay
P154	Non Directional Overcurrent & Earth-fault relay
P253	Motor Protection relay
P652	Transformer Protection relay

For more information, visit  
[governova.com/grid-solutions](https://governova.com/grid-solutions)

IEC is a registered trademark of Commission Electrotechnique Internationale.  
 IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc.

GE Vernova reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50221  
 English  
 250910