




Indoor Current Transformer

Model JCM-0C – 600V, 10kV BIL, 200 & 400A

With Integral Primary Bar

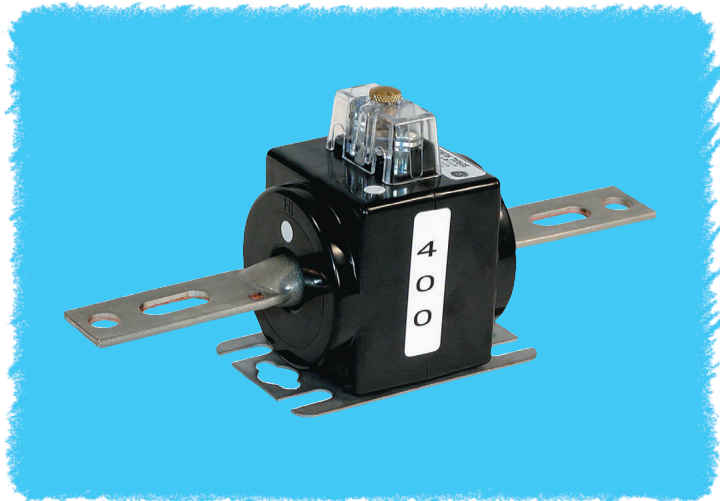

APPLICATION
 Designed for indoor service. Designed to provide high accuracy in applications with high metering secondary burdens. Suitable for operating meters and instruments, on both single-phase two-wire circuits and polyphase circuits.

WEIGHT
 (approximate)
 Transformer, without base 5.8 lbs
 Low Base, add 0.25 lbs
 High (EEI) Base, add 1.0 lbs

REFERENCE DRAWINGS
 Outline 0121C33704

INSULATION LEVEL
 0.6kV; BIL 10kV full wave.

FREQUENCY
 50-60 Hz

JCM-0C DATA TABLE							
Current Ratio (Amps) Pri : Sec	ANSI Accuracy Class, 60Hz Burden Per ANSI			Continuous Thermal Current Rating Factor		Catalog Number	
	B-0.1	B-0.2	B-0.5	@30°C Ambient	@55°C Ambient	With Secondary Hardware and Cover	Without Secondary Hardware and Cover
Without Base							
200:5	0.3	0.3	0.3	2.0	1.5	750X125013	750X125009
400:5	0.3	0.3	0.3	2.0	1.5	750X125014	750X125010
With Low Base							
200:5	0.3	0.3	0.3	2.0	1.5	750X125021	750X125017
400:5	0.3	0.3	0.3	2.0	1.5	750X125022	750X125018
With High (EEI) Base							
200:5	0.3	0.3	0.3	2.0	1.5	750X125029	750X125025
400:5	0.3	0.3	0.3	2.0	1.5	750X125030	750X125026

Construction and Insulation

The core and coil are enclosed in a case molded with GE Valox® thermoplastic polyester resin. This tough material has excellent electrical and mechanical properties over a wide temperature range and is resistant to oil and a variety of chemicals.

Core and Coils

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

Terminals

Secondary terminals are tin plated brass, compression type with a 0.275" diameter cross-hole for wiring and a ¼-28 clamp screw. A shorting device is provided and interlocked to the terminal cover. The terminal cover is made of a clear plastic. Provision is made for sealing the cover.

Polarity

The H1 polarity mark is molded into the case, above the window at one end. The X1 polarity mark is also molded into the case adjacent to the secondary terminal. Both H1 and X1 are also marked with white dots.

Primary Bars

Formed from copper tube, they are tin-plated. They are non-removable and have a potential connector that can be attached above or below the bar at either end. Primary bars conform to ANSI C12.11.

Nameplates

The nameplate is a polyester label attached to the molded case. A polyester rating label is attached to the side of the unit and identifies the nominal current rating in large numerals.

Baseplate and Mounting


The transformer can be mounted in any position and may be suspended from the bus-bar or cable. It has provision for attaching two optional bases. Bases are made from heavy steel and plated. The high base increases the transformer height by 2 inches and meets the dimensions specified in ANSI C12.11

Maintenance

These transformers require no maintenance, other than occasional cleaning if installed where air contamination is severe.

Data subject to change without notice

To purchase or obtain more information about GE Instrument Transformer products, please call GE's Charlotte Service Center at 1-800-431-7867. Product information is also available on our web site at <http://www.GEIndustrial.com>. Click on the Product Index button (right column), select Transformers and follow the menus to **Product Information** or a **Solutions Advisor**

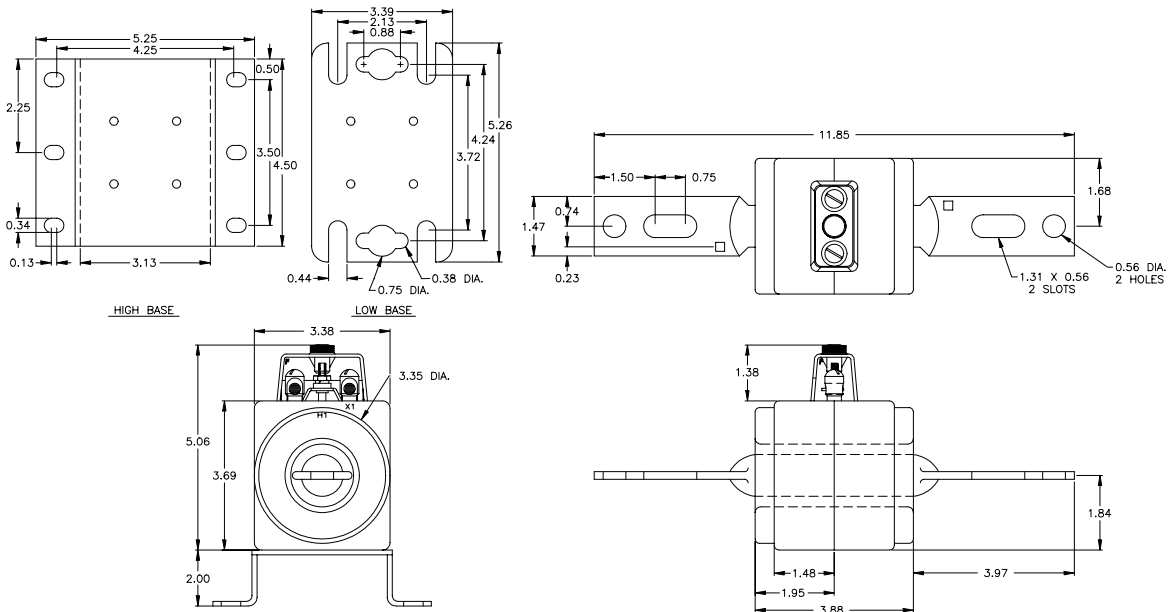

JCM-0C Dimensions



130 Main Street
Somersworth, NH 03878

1907 Calumet Street
Clearwater, FL 33765

GE Industrial Systems