

# MODEL 139MR

## Current Transformer Multi-Ratio

Window Diameter 6.50"



### Application

Relaying.

### Frequency

50-400 Hz.

### Insulation Level

600 Volt, 10 kV BIL full wave.



Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Order mounting bracket kit 0221B01528 separately.







Approximate weight 40 lbs.

### Model 139MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30 °C	@ 55 °C
139-601MR	C100	2.0	2.0
139-122MR	C200	1.5	1.33
139-202MR	C200	1.5	1.33
139-302MR	C400	1.33	1.0
139-402MR	C200	1.0	0.8
139-502MR	C400	1.0	0.8

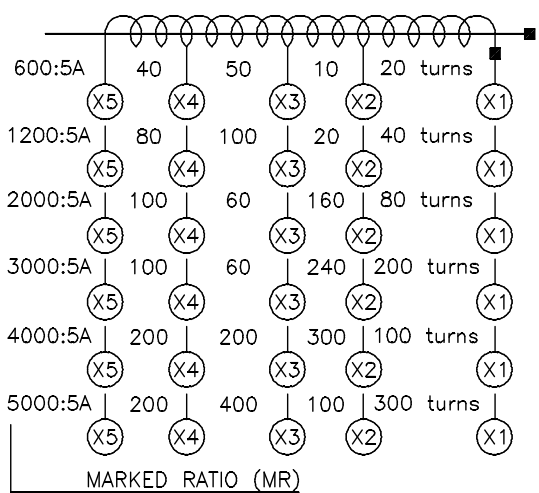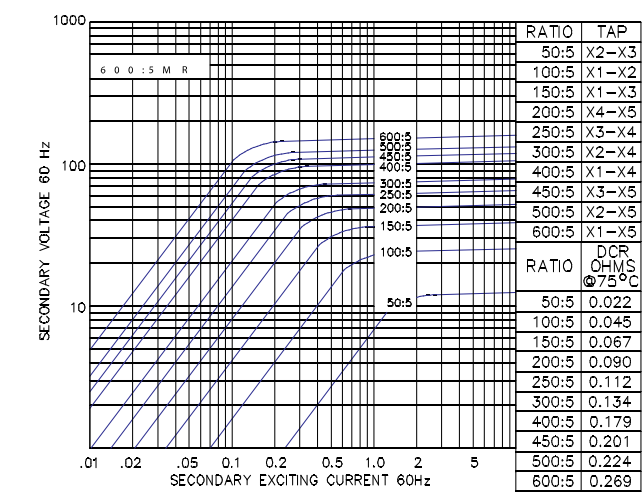

# 139MR

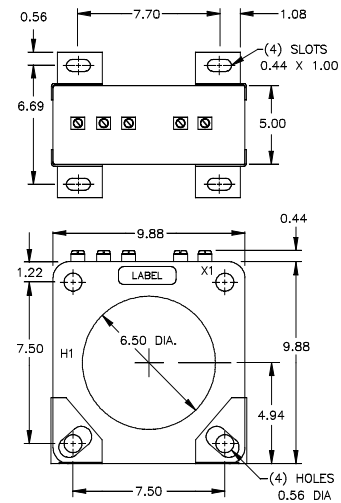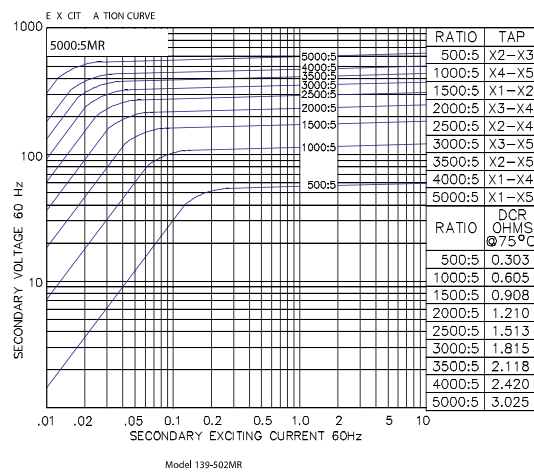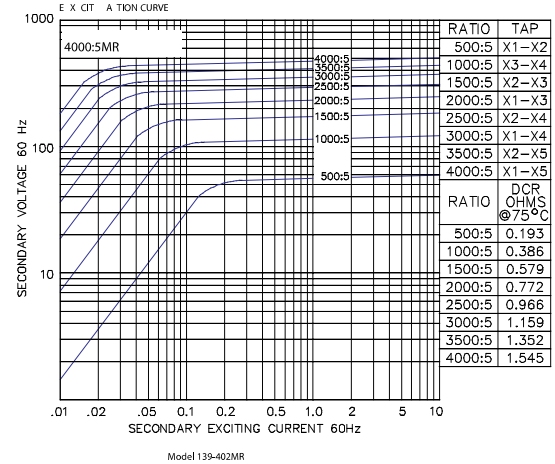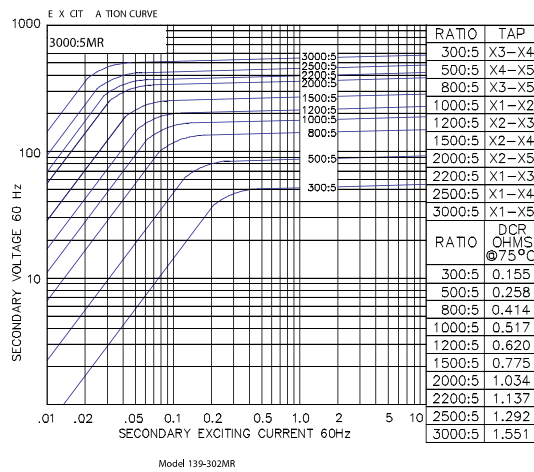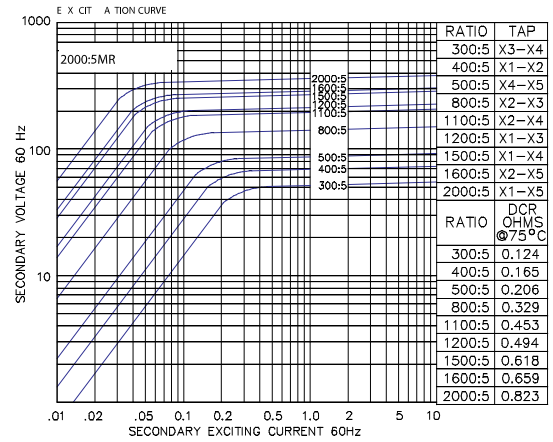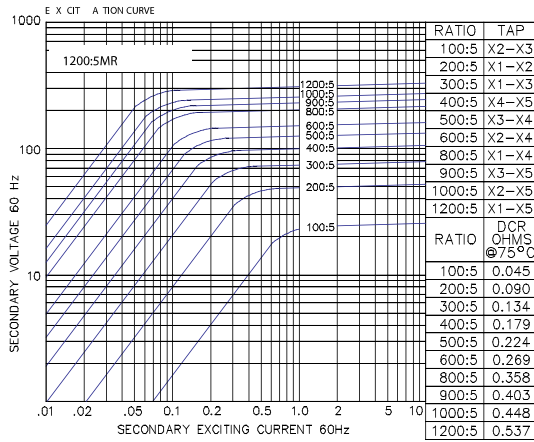

For more information, visit  
[gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50660  
 English  
 250911