

MODEL 603-500T & 603D-500T

Current Transformers Split Core

Window Size 2.00" x 1.00", 2.00"x 2.00"

Application

For energy management systems and instrumentation equipment having a no return high input impedance, eg. 14 K ohms minimum.

Frequency

50-400 Hz.

Insulation Level

0.6kV, 10 kV BIL full wave.

Models 603-500T & 603D-500T

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 Hz
603-101-1	100:1	-	-
603-201-1	200:1	-	-
603-301-1	300:1	-	-
603D-101-1	100:1	-	-
603D-201-1	200:1	-	-
603D-301-1	300:1	-	-
603D-401-1	400:1	-	-
603D-500T	500 Turns	-	-
603D-501-1	500:1	-	-
603D-601-1	600:1	-	-



603-500T



603D-500T

REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1

Continuous Thermal Current Rating Factor


Model 603:
 350 A at 30°C. amb.,
 260 A at 55°C. amb.

Flexible leads UL 1015, 105°C, CSA approved, #22 AWG, 24" long unless otherwise specified.

Approximate Weight:

Model 603-500T 0.63 lbs.
 Model 603D-500T 0.75 lbs.

TYPICAL PERFORMANCE CHARACTERISTICS MODEL 603-500T
(WITH 500 TURNS)

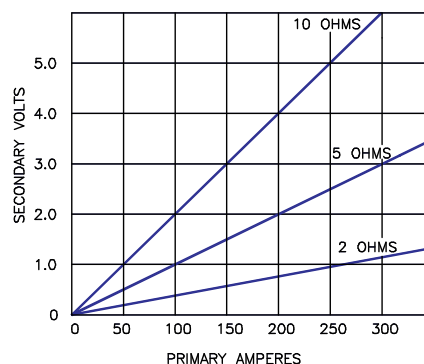

Models 603-500T & 603D-500T Split Core

These transformers are designed for assembly to an existing electrical installation without the need for dismantling the primary bus or cables.

These transformers is intended for use with high input impedance devices that require signal voltages up to 5 VAC.


The output can be rectified and filtered for devices requiring DC input. The non-linearity and voltage drop of the rectifiers and filters must be considered in the choice of the loading impedance.

Caution:


Proper safety precautions must be followed during installation by a trained electrician. Never install while bus is energized.

The current transformer must have its secondary terminals short circuited or the burden connected, before energizing the primary circuit.

Model 603-500T

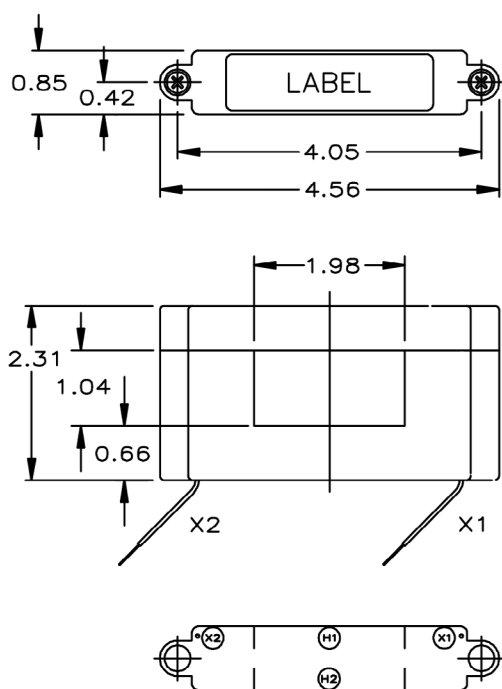

Model 603D-500T

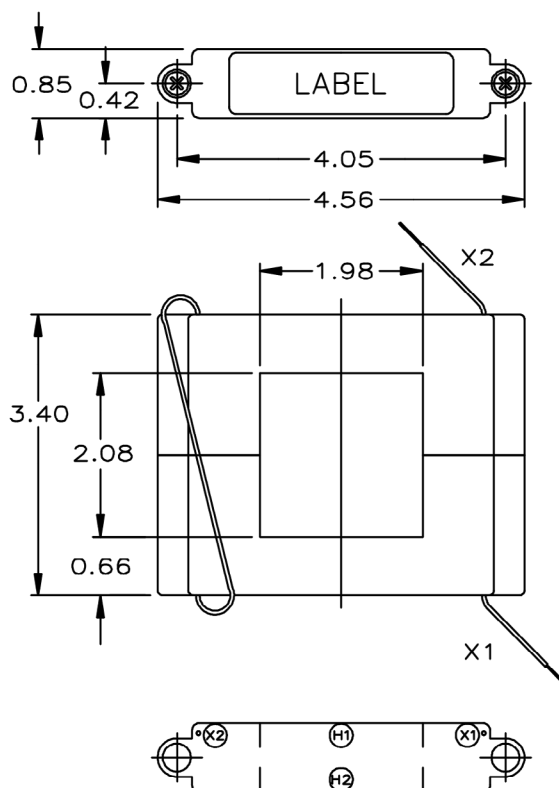

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50546
English
251016