

MODELS 63A, 63B, 63C

Current Transformer

Window Diameter 0.56", 1.25", 2.00"



Application

With ammeters, wattmeters, and cross current compensation.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminal are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Approximate weight

Model 63A-2.0 lbs.

Model 63B-2.0 lbs.

Model 63C-2.0 lbs.

Model 63A

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz	DIM "A"
63A-500	50:5	±2%	2.5	0.56
63A-600	60:5	±2%	2.5	
63A-750	75:5	±1%	2.5	
63A-800	80:5	±1%	2.5	
63A-101	100:5	±1%	2.5	


Model 63B

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz	DIM "A"
63B-500	50:5	±2%	1.5	1.25
63B-750	75:5	±2%	2.5	
63B-101	100:5	±1%	2.5	
63B-1250	125:5	±1%	2.5	
63B-151	150:5	±1%	3.0	
63B-1750	175:5	±1%	4.0	
63B-201	200:5	±1%	5.0	
63B-251	250:5	±1%	6.0	
63B-301	300:5	±1%	6.0	

Model 63C

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz	DIM "A"
63C-500	50:5	±3%	1.0	2.0
63C-101	100:5	±1%	1.0	
63C-151	150:5	±1%	2.0	
63C-201	200:5	±1%	4.0	
63C-2250	225:5	±1%	4.0	
63C-251	250:5	±1%	5.0	
63C-301	300:5	±1%	6.0	
63C-401	400:5	±1%	7.5	
63C-501	500:5	±1%	10.0	
63C-601	600:5	±1%	10.0	

Model 63A, 63B & 63C

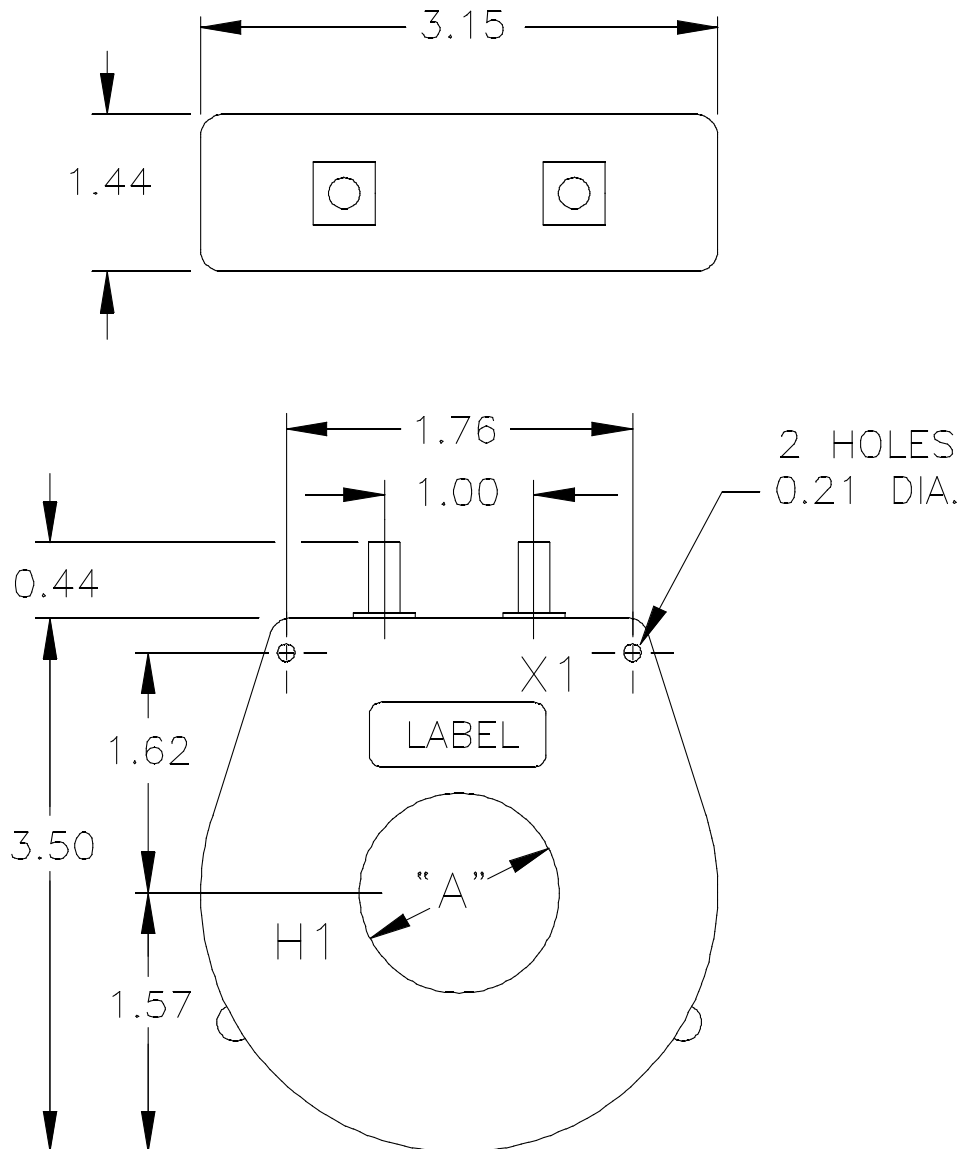

For more information, visit
[gevernova.com/grid-solutions](https://www.gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50496
English
250924