# **Grid Solutions**

# **MODEL JAU-OC**

# **Indoor Current Transformer**

10 kV BIL, 50-800 A Window Diameter 1.05"/2.06"/3.00"



Model JAU-0C

## **Application**

Designed for indoor service. Suitable for use with indicating instruments and energy management systems. Due to their very low burden capability, these transformers are not normally used with watthour meters for revenue billing.

## **Regulatory Agency Approvals**

UL Recognized File ......E93779

## **Rating Factor**

1.0 @ 30°C

## Weight

(approximate)

	Transformer	with	1.05"	window		•••••	 •	 0.	5 I	bs.
-	Transformer	with	2.06"	window	/		 	 0.	6 I	bs.
-	Transformer	with	3.00"	window	/		 	 0.	9	bs.

# **Reference Drawings**

Outlines

JAU-0C .......0121C33701

## **Insulation Level**

0.6 kV; Designed for use with insulated conductors.

## Frequency


50-60 Hz



# JAU-0C

CURRENT RATIO (Amps)	OPERAT	ION AT 60 Hz	DIMENSIONS, I (SEE OUTLINE D			CATALOG NUMBER	
Pri: Sec	ACCURACY	BURDEN	OUTSIDE Dim. AxB	WINDOW Dia. C	THICKNESS D	JAU-0C	
50:5	3%	1.5 VA @ 1.0 PF	2.47 X 2.74	1.05	1.05	750X191001	
60:5	2%	2 VA @ 1.0 PF	2.47 X 2.74	1.05	1.05	750X191002	
75:5	2%	2 VA @ 1.0 PF	2.47 X 2.74	1.05	1.05	750X191003	
80:5	2%	2 VA @ 1.0 PF	2.47 X 2.74	1.05	1.05	750X191004	
100:5	1%	2 VA @ 1.0 PF	2.47 X 2.74	1.05	1.05	750X191005	
120:5	1%	2.5 VA @ 0.9 PF	2.47 X 2.74	1.05	1.05	750X191006	
125:5	1%	2.5 VA @ 0.9 PF	2.47 X 2.74	1.05	1.05	750X191007	
150:5	1%	4 VA @ 0.9 PF	2.47 X 2.74	1.05	1.05	750X191008	
200:5	1%	4 VA @ 0.9 PF	2.47 X 2.74	1.05	1.05	750X191010	
100:5	1%	1 VA @ 1.0 PF	3.43 X 3.74	2.06	1.10	750X191011	
150:5	1%	2.5 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191012	
200:5	1%	4 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191013	
250:5	1%	6 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191014	
300:5	1%	7.5 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191015	
400:5	1%	10 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191016	
500:5	1%	12.5 VA @ 0.9 PF	3.43 X 3.74	2.06	1.10	750X191017	
200:5	1%	5 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191018	
250:5	1%	5 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191019	
300:5	1%	6 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191020	
400:5	1%	10 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191021	
500:5	1%	10 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191022	
600:5	1%	10 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191023	
750:5	1%	10 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191024	
800:5	1%	12.5 VA @ 0.9 PF	4.50 X 4.88	3.00	1.10	750X191025	

# **Dimensions - Refer to Data Table**

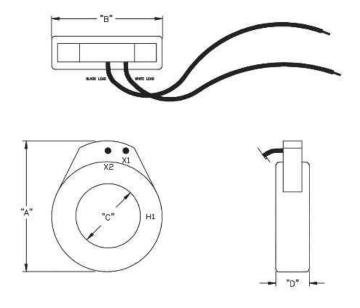

#### **Construction and Insulation**

The core and coil are enclosed in a case molded with GE Vernova Noryl thermoplastic PPO resin. This material has excellent electrical and mechanical properties over a wide temperature range, low water absorption and is flame resistant.

#### **Core and Coils**

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire. The secondary windings are evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

#### **Terminals**

Secondary terminals on Model JAU- 0C has 24" flexible leads of #16 stranded wire.

#### **Polarity**

The H1 polarity mark is molded into the case, at the side of the window on one face. The X1, X2 polarity marks are also molded into the case adjacent to the secondary terminals. On Model JAU-OC, the polarity X1 lead is white and the non-polarity X2 lead is black.

### **Primary Conductor**

These units are designed to be placed over an insulated cable which forms the primary winding.

#### **Nameplates**

The nameplate is a polyester label attached to the side of the transformer.

### Mounting

The transformer can be mounted in any position. And, may be suspended from the bus-bar or cable.

#### **Maintenance**

These transformers require no maintenance, other than occasional cleaning, if installed where air contamination is severe.



Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

