

# MODEL PTM-0

## Indoor/Outdoor Voltage Transformer

10 kV BIL, 600 V



### Application

Designed for indoor service; suitable for operating meters, instruments, relays, and control devices.

### Thermal Rating

55°C Rise above 30°C Ambient..... 200 VA

### Weight

(Approximate)  
Unfused ..... 9.75 lbs.

### Reference Drawings

Outline..... 0122C02910

### Insulation Level

0.6 kV; BIL 10 kV full wave

### Frequency


60 Hz

### PTM-0

| TRANSFORMER RATING |       | IEEE ACCURACY CLASS, 60 Hz<br>BURDEN PER IEEE |     | APPROVAL NUMBER FROM<br>CCAC | CATALOG NUMBER |
|--------------------|-------|---|-----|------------------------------|----------------|
| PRIMARY VOLTAGE    | RATIO | W   | X   |                              |                |
| 120                | 1:1   | 0.3   | 0.6 | T-148-2                      | 420-001        |
| 240                | 2:1   | 0.3   | 0.6 | T-148-2                      | 420-002        |
| 300                | 2.5:1 | 0.3   | 0.6 | T-148-2                      | 420-003        |
| 360                | 3:1   | 0.3   | 0.6 | T-148                        | 420-004        |
| 480                | 4:1   | 0.3   | 0.6 | T-148-1                      | 420-005        |
| 600                | 5:1   | 0.3   | 0.6 | T-148                        | 420-006        |

\* For these models please contact factory for availability and approval number from CCAC for revenue metering application.

## Model PTM-0 10 kV BIL, 600 V

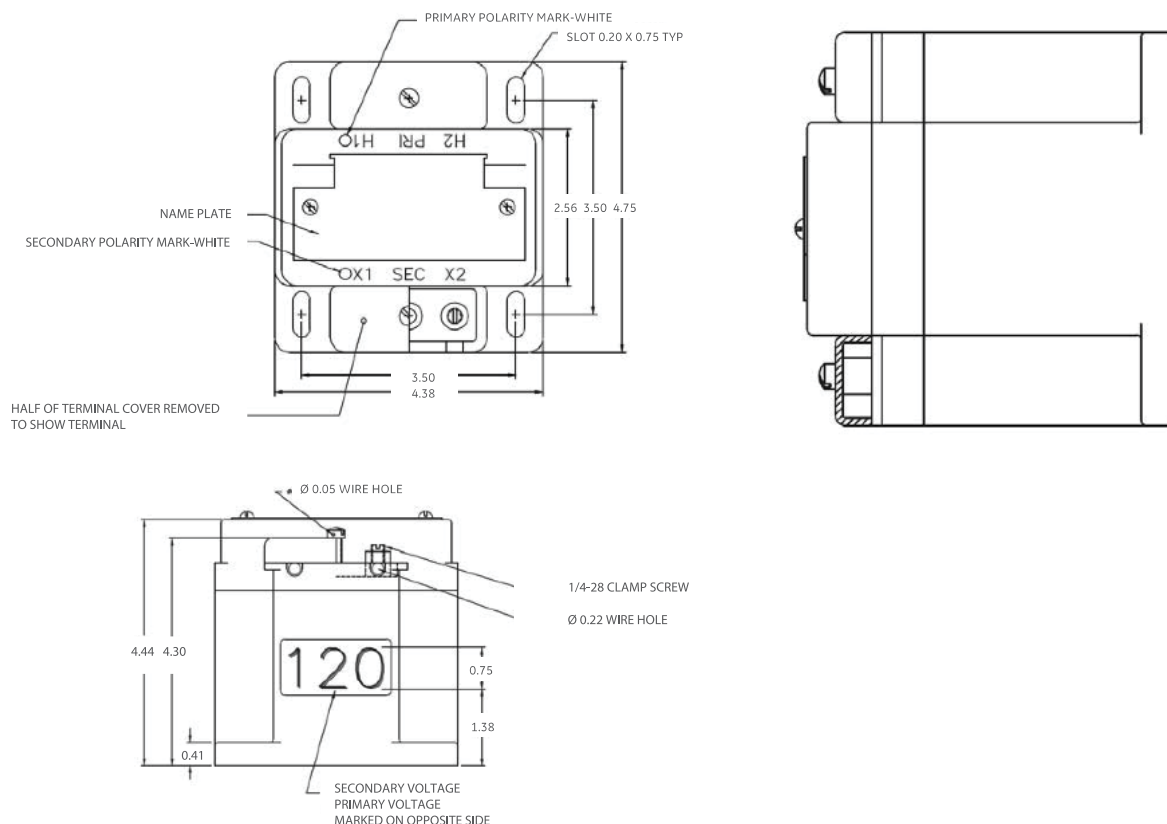

### Construction and Insulation

The core and coil are placed in a plastic shell made from GE Vernova Valox and encapsulated in a polyurethane.

### Core and Coils

The primary and secondary coils are precision wound on an insulated spool. Once the coils are wound, a distributed gap, grain oriented silicone steel core is positioned through the center of and around the outside of this combined coil.

### Primary Terminals

These compression terminals, identified as H1 and H2, are conveniently located on top of the transformer. They are fixed, tin plated, brass posts with holes to accommodate No. 6 to No. 14 wire sizes. The brass screws for securing wires to the posts are tin-plated.

### Secondary Terminals

These compression terminals, identified as X1 and X2, are conveniently located on top of the transformer. They are fixed, tin plated, brass posts with holes to accommodate No.6 to No. 14 wire sizes. The brass screws for securing wires to the posts are tin-plated.

### Nameplates

The nameplate is laser engraved aluminum. It is mounted on the top of the transformer. Provision is made for attaching the user's identifying tag.

### Cover

A transparent, plastic terminal cover is furnished over the primary and secondary terminals. This cover provides a safe means of observing the electrical connections without requiring its removal.

### Maintenance

These transformers require no maintenance other than occasional cleaning.

For more information, visit  
[gevernova.com/grid-solutions](https://www.gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50523  
English  
250930