

# MODEL HGF5C

## Ground Fault Current Transformer



Specially designed to match the ground fault input of GE Vernova Multilin motor protection relays and should be used to ensure correct performance. This CT can sense low leakage currents over the relay setting range with minimum error.



### Notes

1. Ratio 50:0.025 Amp
2. Insulation Class: 0.6 kV, 10 kV BIL
3. Frequency: 50-60 Hz
4. DC Resistance approximately 26 ohms
5. Thermoplastic case on metal bracket
6. Terminals are #10-32 brass studs with one flat washer, lockwasher, and regular nut

7. Approximate weight: 3.0 lbs. (1.4 kg)
8. UL and cUL recognized
9. Dimensions shown as inches [mm]
10. Order mounting bracket kit 0221B00231 separately
11. Application: Ground fault sensors to work in conjunction with GE Vernova Multilin motor management relays.

### Part Number

125-SD-38591  
50:0.025 Amps (2,000:1 Ratio)  
Replaces Multilin P/N HGF5

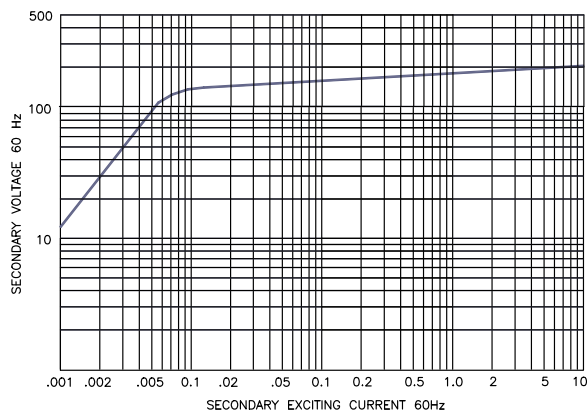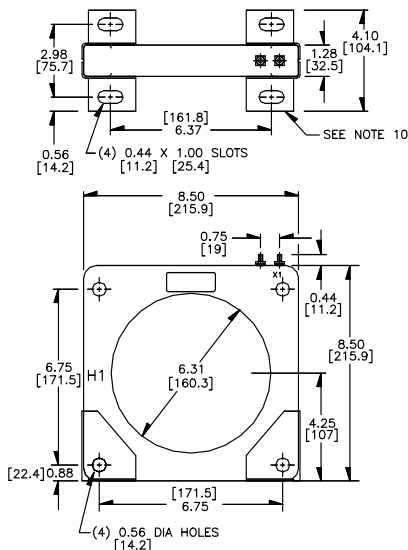

For more information, visit  
[gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50310  
English  
251023