



Gridcom DXC-S

SDH Multiplexer Equipment

Reliable and fast communications are vital to the continuous operation of power delivery systems and their mission-critical automation services (protection, voice and data)

The modern high voltage electrical substation hosts many applications, including a great number of legacy interfaces, which in time may migrate to ethernet connectivity.

Gridcom DXC-S STM-1/4/16 (OC-3/12/48) is a standard compliant high density NGN SDH/SONET ADM/TM with a full T1/E1 cross-connect rack system.

With STM-1/4/16 (OC-3/12/48) aggregate interfaces on cross-connect modules and 16 STM-1 (OC-3) interfaces on tributaries, the DXC-S offers the service provider a versatile protection scheme including SNCP (UPSR), and MSP (1+1) protection for both ring and linear network topology.

All interfaces are fully compliant with the relevant ETSI standards and ITU recommendations. The **Gridcom DXC-S** provides powerful operation, administration, maintenance and provisioning (OAM&P) functionality, including fault management, performance monitoring, configuration management, and network security management. Through a console port, LAN port, In-band E1, and DCC channel, the OAM&P can be achieved both locally and remotely via SNMP or menu-driven interfaces.

It provides a complete set of operation interfaces that are consistent with the Telecommunication Management Network (TMN) concept (ITU Recommendation M.30, G.784) for SDH/SONET Network Element/Operations System (NE/OS), NE/NE, and NE/Craft communications. Users can easily operate the **Gridcom DXC-S** locally or remotely for centralized management.

Full Add and Drop Capability

- For controller STM-1/4 (OC-3/12) aggregate cross connect module, up to:
 - 5 STM-4 interfaces
 - TDMoG interfaces
 - 12 STM-1 interfaces
 - 18 E3/T3 interfaces
 - 378 E1/T1 interfaces
 - 48 10/100M Ethernet EoS interfaces
 - 6 GbE EoS interfaces
- For controller STM-1/4/16 (OC-3/12/48) aggregate cross connect module, up to:
 - 3 STM-16 protected (MSP 1+1)
 - 8 STM-4 interfaces
 - 20 STM-1 interfaces
 - 24 E3/T3 interfaces
 - 504 E1/T1 interfaces
 - 64 10/100M Ethernet EoS interfaces
 - 8 GbE EoS interfaces
 - 56 FOM interfaces
 - 4 TDMoG interfaces



Main Features

- 6U height, full front access (ETSI) shelf, RoHS compliant
- Hot-swappable cross-connect modules, tributary modules and power modules
- Temperature-controlled fan tray
- Aggregate cross-connect modules (controller modules)
 - Up to STM-1/4/16 (OC-3/12/48) aggregate lines with software configuration (CC16)
 - Up to STM-1/4 (OC-3/12) aggregate lines with software configuration (CC4)
- Tributary modules
 - 8 tributary slots
 - Dual ports STM-16 (OC-48) module
 - Dual ports STM-1/4 (OC-3/12) module
 - Triple ports E3/T3 module
 - 16/32/63 ports E1/T1 tributary module
 - 1 GbE and 8 FE tributary module with L2 switch
 - 4 GGeoSDH with L2 switch tributary module
 - TDMoG tributary module
 - 7 FOM module
- Power Modules
 - DC module (-36 to -72 Vdc)
 - AC/DC hybrid module (90 to 240 Vac; -36 to -72 Vdc)
 - Dual power (1+ 1) protection
- Protection
 - Controller-Cross-connect Unit (XCU) protection, MSP (1+1), SNCP/UPSR
 - Tributary protection
 - E1/T1: Card, Port, Line
 - E3/T3: Line
 - B155/622: MSP, SNCP/UPSR
 - Ethernet
 - FOM: Line
 - 4GGeoSDH: Card
 - TDMoG: Card
- TM, ADM, and cross-connect
- Full cross-connect at VC11/VC12/VC3/VC4 levels
- External/Internal/Line timing source with SSM
- Ethernet supports GFP, LAPS, VCAT, BCP, LCAS and non-LCAS
- Ethernet Order Wire (EOW) using VoIP technology
- Management
 - Console port, VT100 menu-driven,
 - SNMP port: both V1 and V3 supported
 - Telnet, SSH
 - Centralized management with EMS/NMS over DCC channel
 - iNET GUI Element Management System
 - iNMS with full FCAPS and end-to-end circuit management
 - RoHS compliant

Capacity

Max. Number of Cross-connect Modules

- 4 STM-1/4 (OC-3/12) aggregate lines
- 4 STM-1/4/16 (OC-3/12/48) aggregate lines

Max. Number of interfaces for STM1/4 (OC3/12) Cross-connect Module


- 5 STM-4 interfaces
- TDMoG interfaces
- 12 STM-1 interfaces
- 18 E3/T3 interfaces
- 378 E1/T1 interfaces
- 48 10/100M Ethernet EoS interfaces
- 6 GbE EoS interfaces

Max. Number of interfaces for STM1/4/16 (OC3/12/48) Cross-connect Module

- 3 STM-16 protected (MSP 1+1)
- 8 STM-4 interfaces
- 20 STM-1 interfaces
- 24 E3/T3 interfaces
- 504 E1/T1 interfaces
- 64 10/100M Ethernet EoS interfaces
- 8 GbE EoS interfaces
- 56 FOM interfaces
- 4 TDMoG interfaces

Technical Data

DXC-S Front View

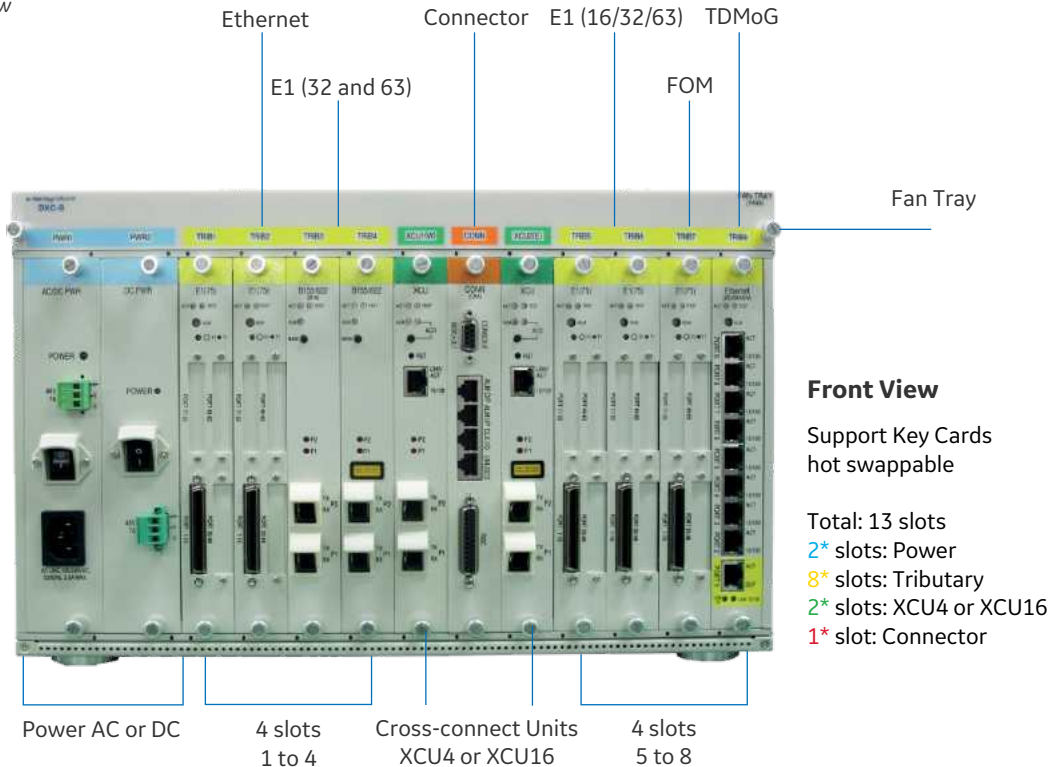

Line Interfaces

E1 (2Mbps) Interface Boards

- Line rate: 2.048 Mbps +/- 50 ppm
- Line code: AMI or HDB3
- Impedance: 75/120 Ohms
- Number of ports: 16/32/63
- Equipment protection: 1+1 EPS
- Line protection: 1+1 APS

Optical Line Interface Boards

- Type of board: 1 slot
- Number of interfaces 7 (SFP)
- Line rate: 4*2 Mbps
- 1 + 1 line protection

STM1/4 Interface Boards

- GNumber of interfaces 2 (SFP)
- GLine rate: 155/622 Mbps
- GProtection: MSP/SNCP

Ethernet Boards (EoS)

- Physical interface 8 FE and 1 GE
- L2 switch
- L2 protocol: RSTP, VLAN
- Processing: VCAT, GFP, LAPS and LCAS
- Equipment protection: 1+1 EPS

4 GEoSDH Interface Boards

- Number of interfaces: 4 GE (2x combo SFP/GE)
- Speed: 10/100/1000BaseT
- L2 protocol: RSTP, VLAN, Flow control, MSTP, IGMP, QoS
- Processing: VCAT, GFP, LAPS and LCAS

TDMoG Interface Boards

- Number of interfaces: 2 combo GE (SFP/GE) + 4 10/100/1000BaseT

STM16 Interface Boards

- Number of interfaces: 2 (SFP)
- Line rate: 2.5 Gbps
- Protection: MSP 1+1

Others Data Interfaces

- GT1, E3, T3

System Clock

Clock Source

- Internal clock
- 4 aggregate line clocks (STM-1/4/16)
- 6 tributary clocks
- 2 external input clocks (2MHz or E1/T1)

Clock Output

- 2 external output (E1/T1)

Management Interface

- LED Multi colors
- Console Electrical: RS232, DCE
- Connector: DB9, female
- User interface: Menu driven VT-100
- Telnet
- SNMP SNMPv1, RFC1213
- OSS interface 10/100BaseT FE (IEEE 802.3u)
- NE/NE interface
- DCC/HDLC/PPP/Ethernet type II, Inband E1

Alarm Input/Output

Inputs

- 4x channels
- Connector RJ45

Outputs

- 4x channels
- Connector RJ45

Diagnostics/ Performance

- Loopback Test
- BERT Test
- Performance
- Reports
- Alarms

Power

- AC and DC coexistent module: 90 to 240 Vac, 50/60 Hz, -48 Vdc (-36 to -72 Vdc)
- DC module: -48 Vdc (-36 to -72 Vdc)

Mechanical Characteristics

- Dimensions: 433 x 264 x 223.5 mm (W/H/D)
- Mounting: 19" rack mountable - 6U height

Operating Condition

- Operating temperature: 0°C to 50°C
- Humidity: 0 to 95% (non-condensing)

Standards Compliance

- ITU-T
- G.703,
- G.707,
- G.751, G.747, G.7041, 7042, G.775, 783, 806,
- G.813,
- G.823,
- G.841, G.824, G.826,
- G.747, X.86, 664
- ANSI T1.105, T1.107
- IEEE 802.1q (VLAN), 802.1w (RSTP),
- 802.1s(MSTP), 802.1ad (stack VLAN),
- 802.3x (flow control),
- 802.3u, 802.1p (QoS)

Certification

- EMC FCC Part 15 Subpart B, Class A;
- EN 55022, Class A; EN55024; EN300386
- Safety IEC60950-1/EN 60-950-1

For more information please contact
GE Power
Grid Solutions

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact
Phone: +44 (0) 1785 250 070

GEGridSolutions.com

IEC is a registered trademark of Commission Electrotechnique Internationale. IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc.

GE and the GE monogram are trademarks of General Electric Company.

GE reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

GridcomDXC_S-Brochure-EN-2018-05-Grid-SWS-1054. © Copyright 2018, General Electric Company. All Rights Reserved.



Imagination at work