

Model 387MR

Current Transformer with Multi-Ratio Window Diameter 4.50"

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws with one flatwasher and lockwasher.



Approximate weight 70 lbs.




REGULATORY AGENCY APPROVALS
 E93779 LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1

Model 387MR


Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30 °C	@ 55 °C
387-601MR	C200	2.0	2.0
387-122MR	C400	2.0	1.5
387-202MR	C400	1.5	1.33

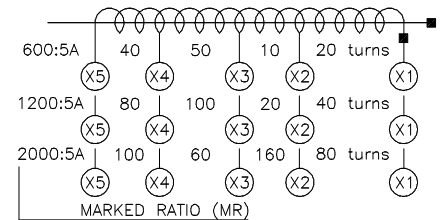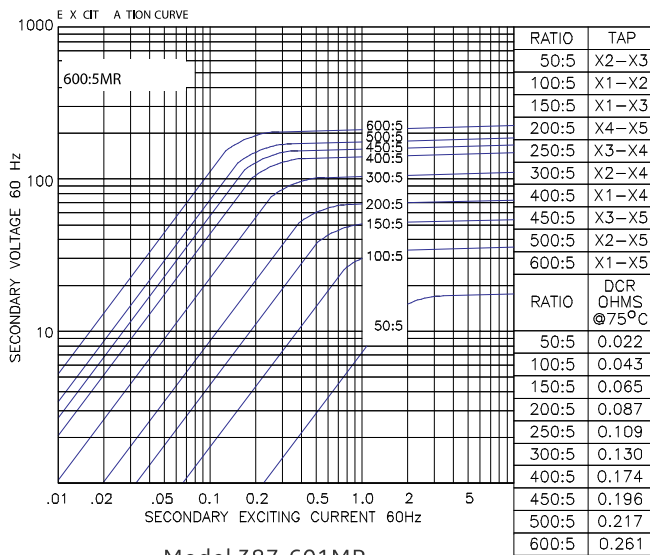


Model 387MR

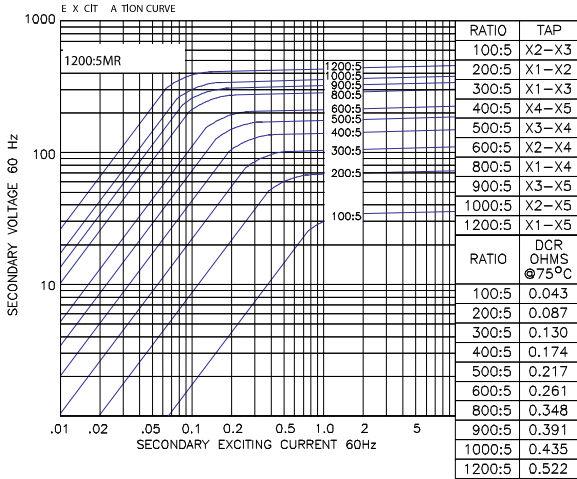

Model 387-122MR

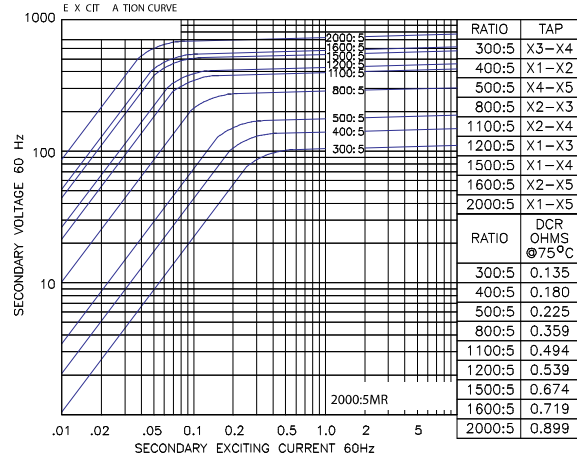

Model 387-202MR

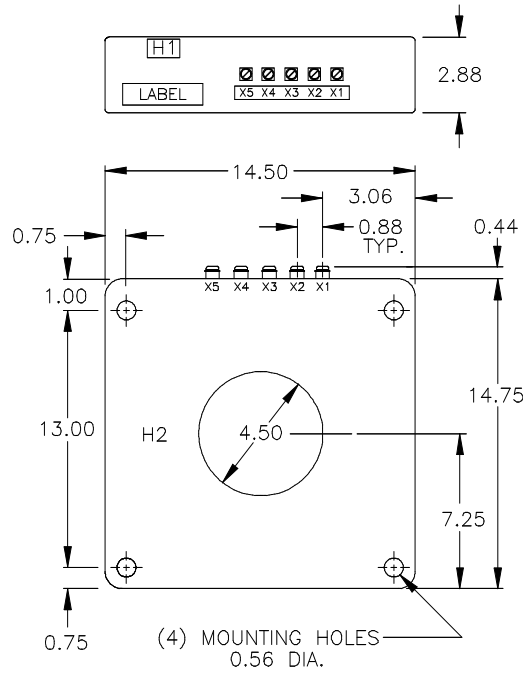

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_387MR-1300-2017_05-EN. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

