

# Model 5DRL

## Current Transformer Window Diameter 1.56"

### Application

Ammeters, wattmeters and cross current compensation.

### Frequency

50-400 Hz.

### Insulation Level

600 Volt, 10 kV BIL full wave.

Flexible leads are UL 1015, 105 °C, CSA approved, #16 AWG, 24" long.

Non-standard, lead length can be specified.

Approximate weight 2 lbs.





## Model 5DRL

Catalog Number	Current Ratio	Accuracy at 60 Hz	Burden VA at 60 Hz
5DRL-500	50:5	± 2%	2.5
5DRL-600	60:5	± 1%	2.5
5DRL-750	75:5	± 1%	3.5
5DRL-101	100:5	± 1%	5.0
5DRL-151	150:5	± 1%	10.0
5DRL-201	200:5	± 1%	12.5
5DRL-251	250:5	± 1%	20.0
5DRL-301	300:5	± 1%	25.0

Catalog Number	Current Ratio	Accuracy at 60 Hz	Burden VA at 60 Hz
5DRL-401	400:5	± 1%	40
5DRL-501	500:5	± 1%	50
5DRL-601	600:5	± 1%	60
5DRL-751	750:5	± 1%	60
5DRL-801	800:5	± 1%	60
5DRL-102	1000:5	± 1%	75
5DRL-122	1200:5	± 1%	90



# Model 5DRL

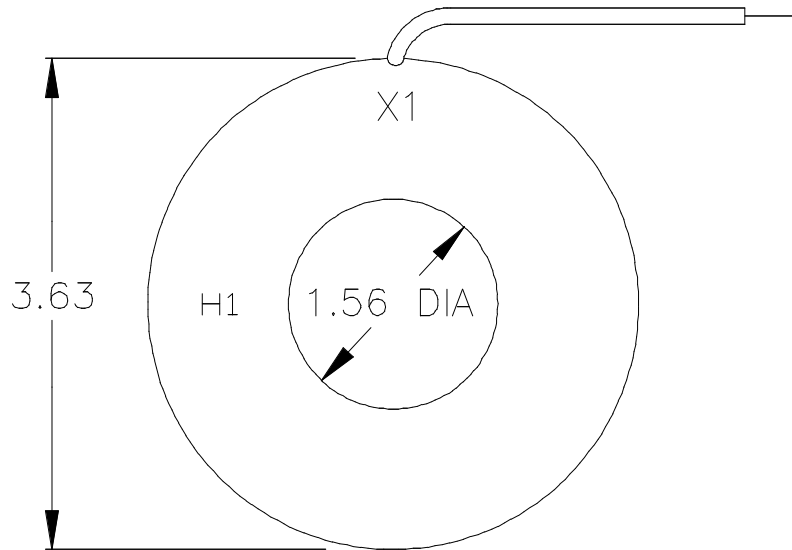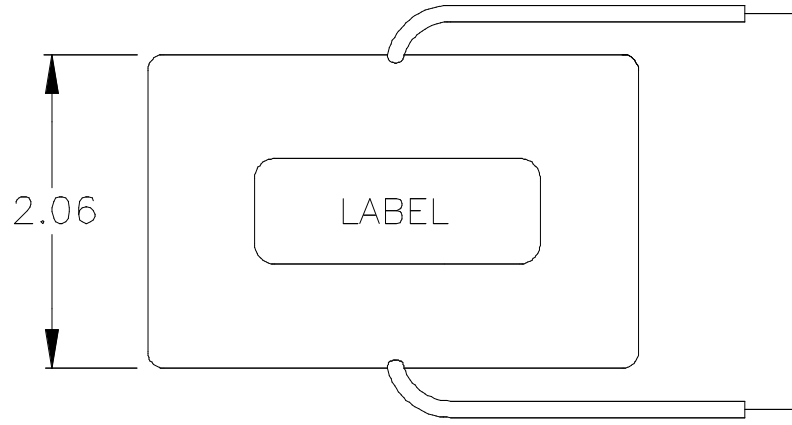

[GEGridSolutions.com](http://GEGridSolutions.com)

Grid-AIS-L4-ITL\_Model\_5DRL-1540-2017\_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

