

MODEL 142MR

Current Transformer Multi-Ratio

Window Diameter 7.25"

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.



Order mounting bracket kit 0221B00259 separately.

Approximate weight 31 lbs.









Model 142MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30 °C	@ 55 °C
142-601MR	C50	2.0	2.0
142-122MR	C200	15	1.0
142-202MR	C200	2.0	1.5
142-302MR	C200	1.0	0.8
142-402MR	C200	1.0	0.8
142-502MR	C200	1.0	0.8

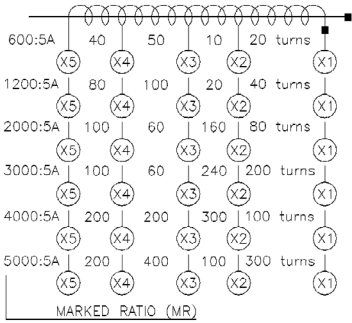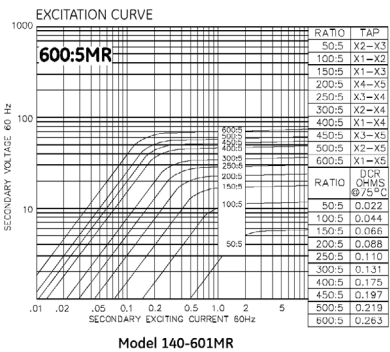

Model 142MR

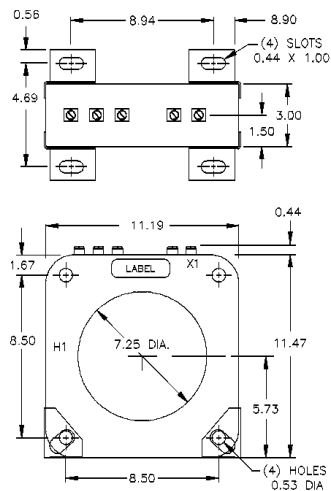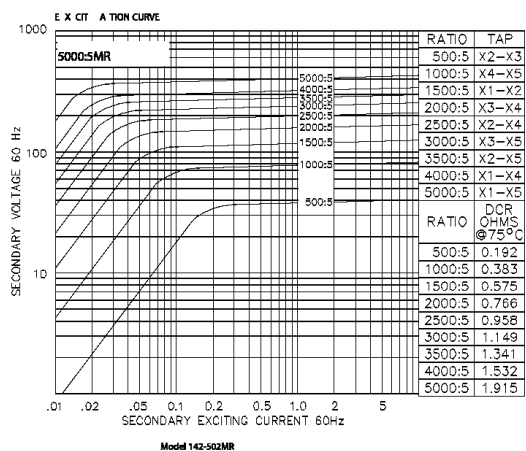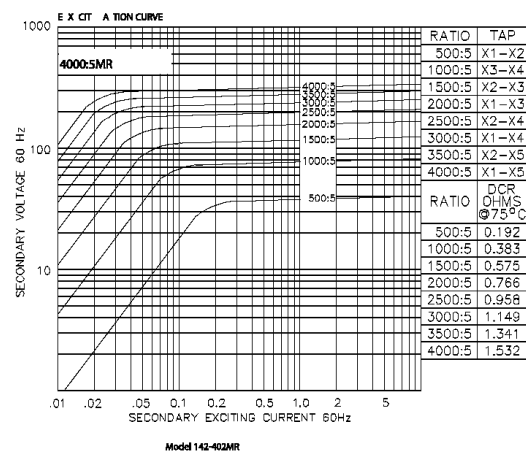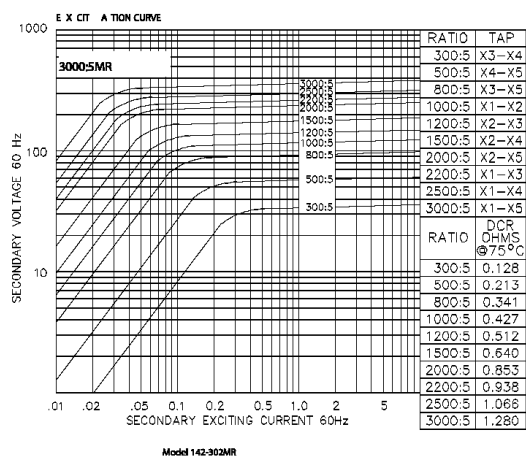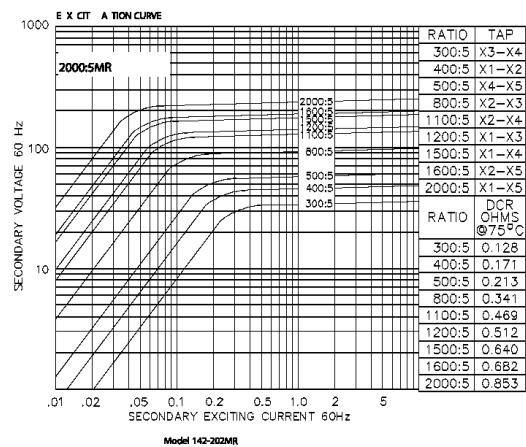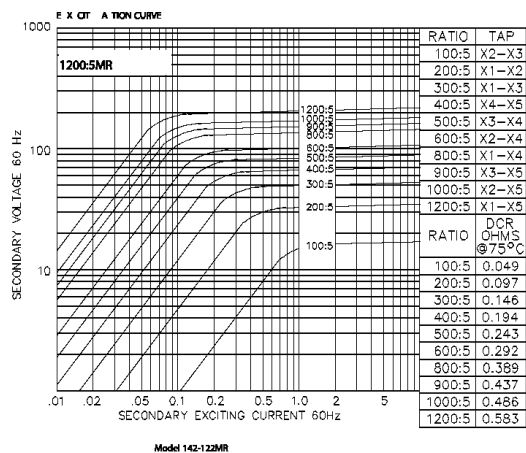

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

GEA-N50603
English
251015



GE VERNOVA