

MODEL 572

Current Transformer

Window Size 4.66" x 4.16"

Application

Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Model 572

CATALOG NUMBER	CURRENT RATIO	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (Ω @ 75°C)
		BO.1	BO.2	BO.5	BO.9	B1.8	
572-801	800:5	0.6	0.6	1.2	1.2	2.4	0.143
572-102	1,000:5	0.3	0.6	0.6	1.2	1.2	0.179
572-122	1,200:5	0.3	0.3	0.6	0.6	1.2	0.215
572-152	1,500:5	0.3	0.3	0.3	0.6	0.6	0.269
572-162	1,600:5	0.3	0.3	0.3	0.6	0.6	0.287
572-202	2,000:5	0.3	0.3	0.3	0.3	0.6	0.497
572-252	2,500:5	0.3	0.3	0.3	0.3	0.3	0.622
572-302	3,000:5	0.3	0.3	0.3	0.3	0.3	0.746
572-322	3,200:5	0.3	0.3	0.3	0.3	0.3	0.796
572-352	3,500:5	0.3	0.3	0.3	0.3	0.3	0.954
572-402	4,000:5	0.3	0.3	0.3	0.3	0.3	1.090



REGULATORY AGENCY APPROVALS
E93779 LR89403
Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1



Continuous Thermal Current Rating Factor

1.33 at 30°C. amb., 1.0 at 55°C. amb.

Terminals are brass studs No. 10-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 6 lbs.

Model 572

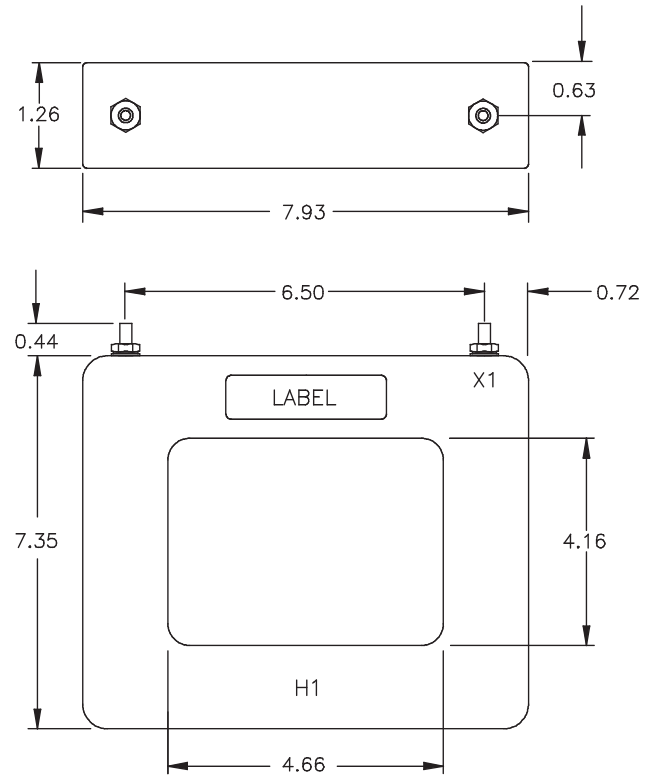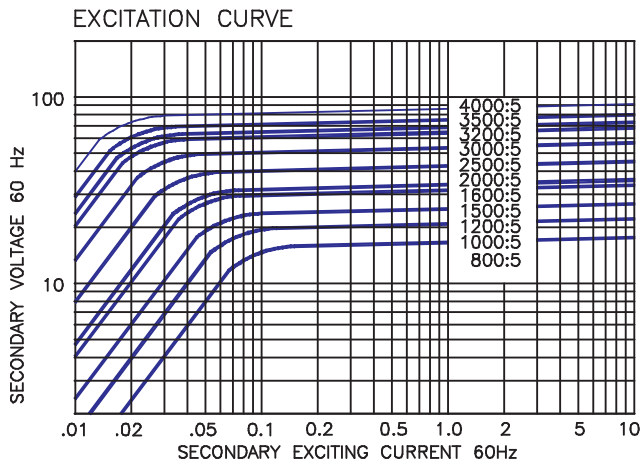

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50513
 English
 250930