

# MODEL JVW-110C

## Outdoor Voltage Transformer

110 kV BIL, 15 kV NSV



### Application

Designed for outdoor service; suitable for operating meters, instruments, relays, and control devices.

### Thermal Rating

30°C Rise Above 30°C Ambient ..... 1,000 VA  
55°C Rise Above 50°C Ambient..... 750 VA

### Dimensions and Weight

Height: 15.65"  
Depth: 13.36"  
Width: 11.50"  
Weight (Approximate) ..... 62 lbs

### Insulation Level

15.5 kV Maximum System Voltage;  
110 kV BIL per IEEE C57.13

### Frequency

60 Hz

### General Information

The JVW-110C is manufactured in GE Vernova's Clearwater, FL. plant utilizing state-of-the-art Automated Pressure Gelation (APG) processes and Hydrophobic Cycloaliphatic Epoxy (HCEP). Insulation levels meet or exceed those specified in IEEE C57.13 and CSA CAN3-C13.

Dimensions meet IEEE C12.11. Exclusive designs, HCEP epoxy, and APG processes are combined to create a superior product. Benefits of HCEP over CEP include lower leakage currents, lower flashover probability, less discharge activity, less erosion from ultra violet (UV) radiation, enhanced thermal cycle resistance, and ultimately better reliability and improved life expectancy.


### JVW-110C

RATED PRIMARY VOLTAGE	RATIO	IEEE METERING ACCURACY	RATED VOLTAGE FACTOR	THERMAL RATING (VA @ 30°C. AMB)	CATALOG NUMBER
Single Bushing					
7,200/12,470GY	60:1	0.3 W, X, M, V	1.1	1,000	765C131101
7,620/13,200GY	63.5:1	0.3 W, X, M, V	1.1	1,000	765C131102
8,400/14,560GY	70:1	0.3 W, X, M, V	1.1	1,000	765C131103
Double Bushing					
7,200/12,470GY	60:1	0.3 W, X, M, V	1.1	1,000	765C131201
7,620/13,200V	63.5:1	0.3 W, X, M, V	1.1	1,000	765C131202
8,400/14,560V	70:1	0.3 W, X, M, V	1.1	1,000	765C131203
12,000/1,2000V	100:1	0.3 W, X, M, V	1.1	1,000	765C131204
13,200/13,200V	110:1	0.3 W, X, M, V	1.1	1,000	765C131205
14,400/14,400V	120:1	0.3 W, X, M, V	1.1	1,000	765C131206




GE VERNOVA

## Type JVW-110C Single Bushing

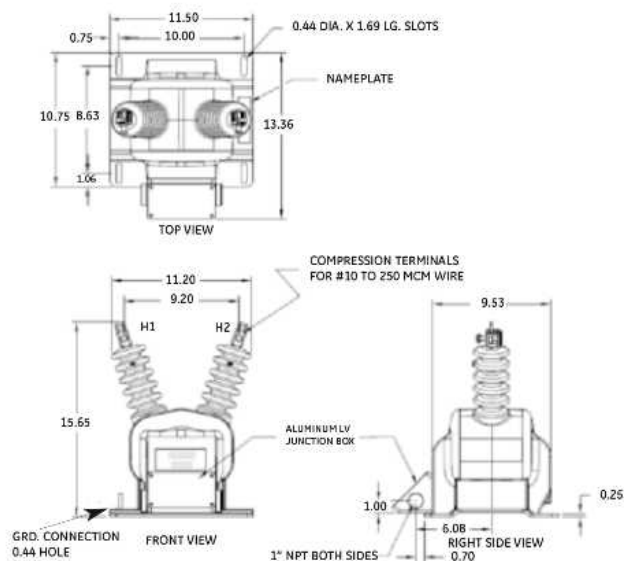

Type JVW-110C Double Bushing

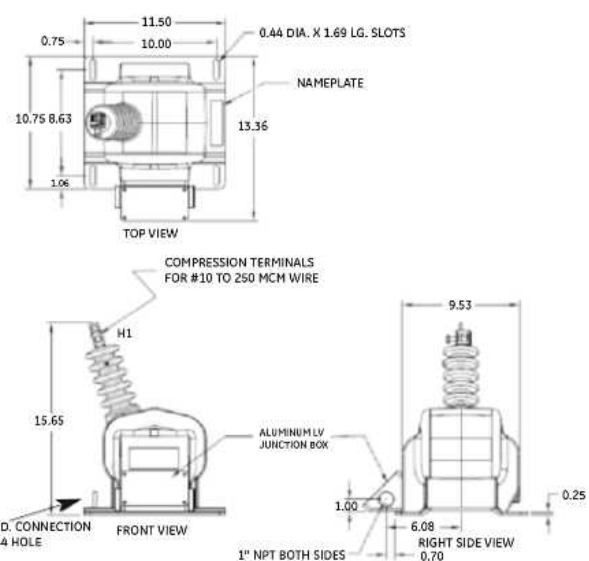

Type JVW-110C Single Bushing

### General Construction

- Insulation - Hydrophobic Cycloaliphatic Epoxy (HCEP)
- Baseplate - Heavy gage marine grade aluminum
- Conduit box - Cast aluminum, removable, 1" threaded hubs
- Nameplate - Anodized aluminum
- Mounting - Horizontal, Vertical, Inverted

### HCEP Resin Features

- Ideal for outdoor applications
- Excellent water repellent characteristics
- High mechanical properties
- Excellent dielectric properties - stable in outdoor humid conditions
- Enhanced thermal cycle resistance
- High resistance to erosion from ultra violet (UV) radiation
- High tracking and arc resistance
- Extended service life

For more information, visit  
[gevernova.com/grid-solutions](https://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50426  
 English  
 251008