

MODELS CPTD7-150-25 & CPTD7-150-37.5 & CPTD7-150-50

Medium Voltage Control Power Transformer



Application

To provide control power in medium voltage switchgear.

Frequency

60 Hz.

Insulation Level

34.5 kV, 150 kV BIL full wave.

Thermal Rating

25 kVA at 30°C ambient.

21.5 kVA at 55°C ambient.

37.5 kVA at 30°C ambient.

32.2 kVA at 55°C ambient.

50 kVA at 30°C ambient.

42.9 kVA at 55°C ambient. 80°C rise.

Characteristics

Primary terminals are 3/8-16 inserts. Secondary terminals are 1/2-13 brass studs.

Supplied with taps on primary side:

Cat. suffix A $\pm 7 \frac{1}{2}\%$ taps or

Cat. suffix B $\pm 2 \frac{1}{2}\%$ taps

Windings are encapsulated in epoxy resin.

Mounting base is steel.

Assembly is varnish coated.

Available as unfused only.

Self cooled.

For indoor use.

Approximate weight 750 lbs.

Models CPTD7-150-25 & CPTD7-150-37.5 & CPTD7-150-50

**CATALOG NUMBER			PRIMARY VOLTAGE	VOLTAGE RATIO	SECONDARY VOLTAGE
25 kVA	37.5 kVA	50 kVA			
CPTD7-150-25 1992**	CPTD7-150-37.5-1992**	CPTD7-150-50-1992**	19920 V	166:1	120/240 V
CPTD7-150-25-2762**	CPTD7-150-37.5-2762**	CPTD7-150-50-2762**	27600 V	230:1	120/240 V
CPTD7-150-25-2882**	CPTD7-150-37.5-2882**	CPTD7-150-50-2882**	28800 V	240:1	120/240 V
CPTD7-150-25-3452**	CPTD7-150-37.5-3452**	CPTD7-150-50-3452**	34500 V	287.5:1	120/240 V

*Note all fuse rating are based on NEC transformer overcurrent protection recommendations. Specific applications may require other other ratings.

**For $1 \pm 7 \frac{1}{2}\%$ taps use suffix "A" after Catalog No.

**For $2 \pm 2 \frac{1}{2}\%$ taps use suffix "B" after Catalog No.




GE VERNOVA




Models CPTD7-150-25 & CPTD7-150-37.5 & CPTD7-150-50

Connection Diagrams



PRIMARY VOLTS	CONNECT
107.5%	1 - 2
100%	2 - 3
92.5%	3 - 4

1 $\pm 7\frac{1}{2}\%$ PRIMARY TAPS
SUFFIX "A"




PRIMARY VOLTS	CONNECT
105%	1 - 2
102.5%	2 - 3
100%	3 - 4
97.5%	4 - 5
92.5%	5 - 6

2 $\pm 2\frac{1}{2}\%$ PRIMARY TAPS
SUFFIX "B"

TOLERANCE:

1 PL ± 0.25

2 PL ± 0.13

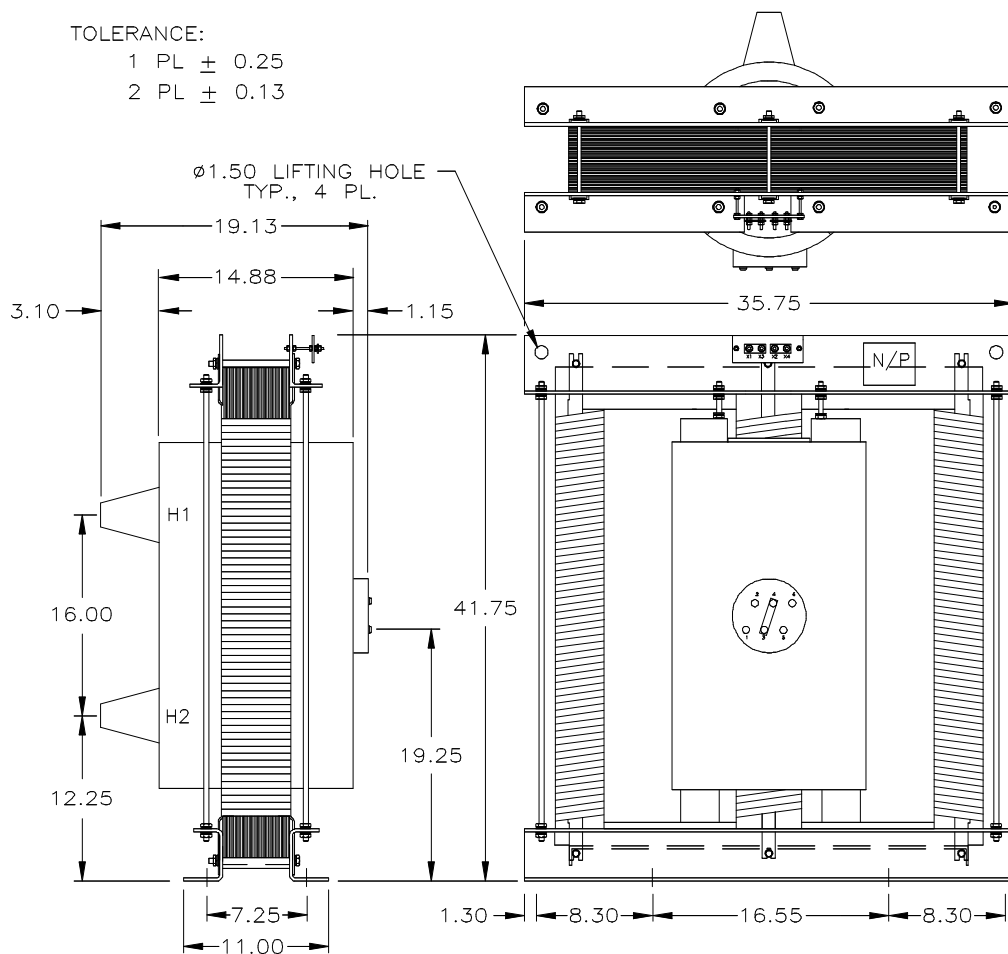

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50320
English
251023