Grid Solutions

MODELS 460F & FF

Voltage Transformers

Applications

60 Hz.

Standard Secondary Voltage

120 Volts.

Insulation Level

600 Volt, 10 kV BIL full wave.

Accuracy Class:

0.6 W, 1.2 X at 60 Hz.

Thermal Rating:

150 VA at 30 °C. amb. 100 VA at 55 °C. amb.

Terminals are brass screws No. 8-32 with one lockwasher, flatwasher.

Approximate weight 7.75 lbs.



Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1



Clear Plastic Cover

Model 460F & FF


CATALOG NUMBER				REC. PRIMARY
PRIMARY FUSES ONLY	PRIMARY AND SECONDARY FUSES	VOLTAGE RATING	TURNS RATING	FUSE RATING
460-069F	460-069FF	69.3:120	0.58:1	5.0
460-120F	460-120FF	120:120	1:1	4.0
460-208F	460-208FF	208:120	1.73:1	2.0
460-240F	460-240FF	240:120	2:1	2.0
460-277F	460-277FF	277:120	2.31:1	2.0
460-288F	460-288FF	288:120	2.4:1	1.5
460-300F	460-300FF	300:120	2.5:1	1.5
460-346F	460-346FF	346:120	2.88:1	1.5
*460-480F	*460-480FF	*480:120	4:1	1.0
*460-600F	*460-600FF	*600:120	5:1	0.75






Model 460F & FF

- The core and coil assembly is encased in a thermoplastic shell and filled with resin.
- These transformers are designed for operation line-to-line. They may also be operated line -to-ground or line-to-neutral at reduced voltage (58% of rated volts).
- It is desirable to use a 1.6 amp BBS type or equal fuse in the secondary to protect the transformer.
- With two exceptions these transformer are ANSI C57.13 group 1. Those marked * are group 2.
- Primary fuses are class CC rejection type.
- · Models designed specifically for 50 Hz operation are available with reduced performance. Consult factory for details.
- This page contains a circle diagram for the estimation of the errors for other than rated burdens. See page 27 in this section for a description of its use.



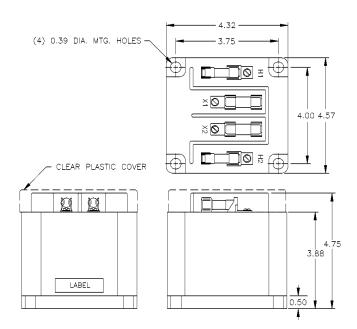

For more information, visit **gevernova.com/grid-solutions**

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

