

# CCV/CC

## Capacitor Voltage Transformers - Coupling Capacitors 69 kV to 765 kV

### Thousands of Installed Units Attest Their Reliability

The CCV-type capacitor voltage transformer acts simultaneously as a potential transformer and as a coupling capacitor. The CCV-type capacitor voltage transformer is designed to support line traps.

CC-type coupling capacitors are used together with inductive potential transformers.

- For revenue metering and protection in high-voltage networks
- HF transmission
- Compliance with ANSI/IEEE, IEC, or equivalent standards
- Reduce the slope of the Rate of Rise of Recovery Voltage (RRRV)
- Performance:
  - 69kV to 765 kV
  - Cn from 20000 to 2500 pF
  - Thermal capacity up to 1000 VA

### Accurate Measurement of High Voltage

Grid Solutions' experience in the field of instrument transformers accounts for over 85 years of accumulated knowledge and we have thousands of units in place worldwide with proven success. Our factories - each with its own well-equipped high-voltage test laboratory - design and build equipment which can be found in network substations around the world.

This experience has been applied to the design and manufacturing of our CCV capacitor voltage transformers and result in a lightweight, strong and reliable unit, able to meet the highest standards. These units are manufactured using the most modern insulation impregnation technology and equipment.



The CCV-type capacitor voltage transformer enables the accurate measurement of high voltages and the transmission of carrier currents ranging from 30 to 500 kHz.

### Customer Benefits

- Superior transient response
- High reliability and longevity due to optimized design
- Operation as coupling capacitors for power line carrier transmission
- Built-in safety features
- Hermetically sealed
- Mineral & synthetic oil-filled
- Non-corrosive hardware



GE VERNOVA

## Reliable Design for Long Life Expectancy

The high-voltage capacitor and intermediate capacitor consist of series-connected capacitor elements. Each element is made of high purity cellulose paper, polypropylene and aluminum sheets forming electrodes. These elements are assembled to form a unit within the porcelain insulator.

Each unit is temperature and vacuum dried, then impregnated with high-grade dried and degassed synthetic dielectric oil.

The oil seal is ensured by synthetic rubber gaskets, which are unaffected by oil or ambient pollution. A stainless steel device allows expansion of the oil inside the insulator, maintaining constant pressure over the range of specified temperatures. The electromagnetic unit, which includes the MV transformer and series inductance, is located in a hermetically sealed, oil-filled tank and is equipped with a protective device thus avoiding overvoltages and ferroresonance. The low-voltage terminal box is mounted on the tank.

Optional accessories such as HF equipment for carrier currents (voltage limiter, grounding switch and drain coil) are also located in the terminal box.

### Insulator

The capacitive voltage transformer is composed of one or several capacitive units depending on the voltage level. The bottom insulator is fastened to the tank by means of a metal flange, which is bonded to the porcelain. This type of mounting gives very high mechanical resistance to withstand severe seismic stresses. The standard design creepage is 25 mm/kV but can be more upon request. The coupling capacitor is composed of one or several capacitive columns on a base without a tank. Ceramic insulator and non-corrosive hardware ensure a weather-proof and environmentally resistant product, ideal for location in polluted or coastal areas. As standard, the insulator is manufactured from the highest grade light grey glazed porcelain. Custom design options also include the utilization of light grey silicon rubber which can be quoted upon request.

### Lifetime

Excellent field experience confirms the soundness of our technical concepts, and our clients have expressed their total satisfaction with our products.



Our R&D team is continuously striving to improve the quality, performance and reliability of our products. CCVs have been designed for a 30-year lifetime but many well out-live this service life.

### External Metallic Parts

External metallic parts (tank, base, head, and flanges) do not require maintenance. The CCV tank and the CC base are zinc-coated steel (sprayed), then painted. This metal protection technique complies with the most exacting standards (surface damages lower than the RE2 degree of rust after 10 years in service). Upon request, the metal parts can be hot-dip galvanized.

1. Oil level indicator (optional)
2. Expansion device
3. Capacitor units
4. Insulating oil
5. Porcelain insulator
6. Seal
7. Electromagnetic unit
8. Low-voltage terminals box / HF terminal
9. Series inductance
10. Medium-voltage transformer
11. Damping circuit against ferroresonance effects

The coupling capacitor only includes items 1 to 6. It is mounted on a steel base. HF terminal is located under the base.

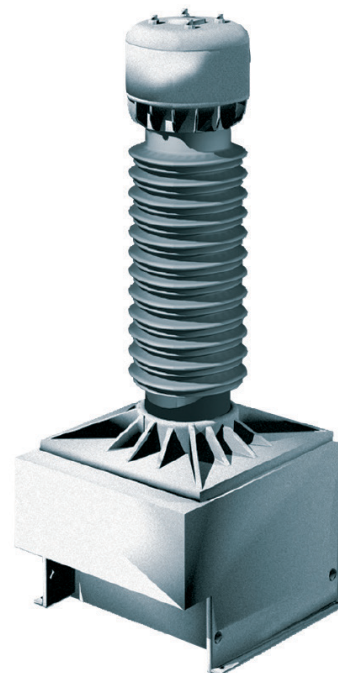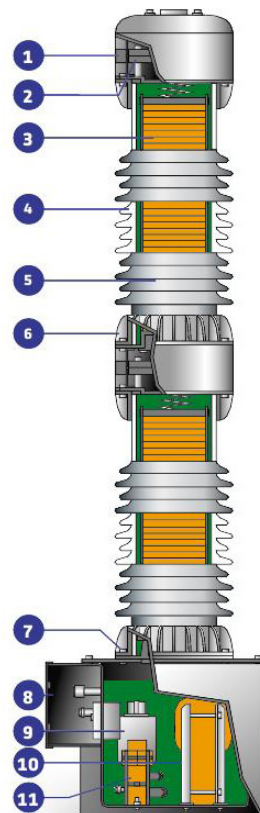

## Electrical Characteristics

|                                           |      |             |              |              |               |               |               |               |               |
|-------------------------------------------|------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|---------------|
| Highest system voltage                    | (kV) | 72.5        | 121          | 145          | 169           | 242           | 362           | 550           | 800           |
| Nominal sysetm voltage                    | (kV) | 69          | 115          | 138          | 161           | 230           | 345           | 500           | 765           |
| AC dry test 1 min.                        | (kV) | 165         | 265          | 320          | 370           | 525           | 785           | 500           | 1200          |
| BIL (1.2/50s)                             | (kV) | 350         | 550          | 650          | 750           | 1050          | 1150          | 1800          | 2425          |
| Rated switching impulse withstand voltage | (kV) | -           | -            | -            | -             | -             | 975           | 1300          | 1675          |
| Rated primary voltage                     | (kV) | 40.25       | 69           | 80.5         | 90            | 138           | 207           | 287.5         | 431.265       |
| Rated Ratio                               |      | 350-600/1-1 | 700-1200/1-1 | 700-1200/1-1 | 1200-2000/1-1 | 1200-2000/1-1 | 2500-4500/1-1 | 2500-4500/1-1 | 3750-6250/1-1 |

## Capacitance Cn:pF

| INSULATOR |       |       |       |      |       |      |      |      |
|-----------|-------|-------|-------|------|-------|------|------|------|
| 15        | 14000 | 8800  | 7200  | 6200 | 4400  | 3600 | 2000 | -    |
| 15        | 20000 | 12000 | 10500 | 8800 | 6000  | 4400 | 2500 | -    |
| 20        | -     | -     | -     | -    | 10000 | 7200 | 5000 | 4000 |


## Accuracy Classes and Rated Burdens

| INSULATOR - TANK |                           |
|------------------|---------------------------|
| 12Z              | 0.6 WXYZ OR 1.2 WXYZ, ZZ. |
| 15A              | 0.3 WXYZ OR 0.6 WXYZ, ZZ. |
| 15B              | 0.3 WXYZ, ZZ.             |
| 20B              | 0.3 WXYZ, ZZ.             |

## Quality As Commitment

Strength reliability and small sizes are main advantages of the CCV and CC series. Capacitor voltage transformers and the coupling capacitors are in accordance with the latest specifications for lightning, switching impulse tests, and internal partial discharge level. Sturdy construction also offers good resistance.

## Electrical Circuit

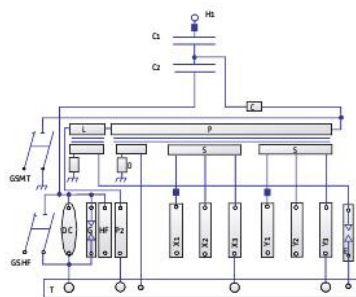

- C. Carrier blocking service
- L. Inductance coil
- E. Voltage limiter device
- P. Transformer primary winding
- S. Transformer secondary winding
- D. Damping device
- HF. Low voltage terminal of the capacity divider
- T. Ground terminal

### On request:

- GS HF. HF grounding switch
- GS MT. MV grounding switch
- DC. Draining coil
- G. Spare gap

## Inquiry Check List

1. Applicable standards
2. Rated frequency
3. Highest system voltage
4. Power-frequency withstand test voltage
5. Lightning impulse test voltage
6. Switching impulse test voltage, if applicable
7. Rated capacitance Cn in pF
8. Overvoltage factor (ex. 1.5 Un 30 s)
9. Voltage ratio
10. Number of secondaries
11. Accuracy class and rated burden for each secondary winding
12. Thermal burden rating in VA
13. Environmental conditions (altitude, temperature, site pollution, seismic conditions, etc.)
14. Required leakage path in mm or in mm/kV
15. Options as required:
  - HV terminal (material and dimensions)
  - G Carrier accessories (1 voltage limiter, 1 HF disconnecting switch, 1 draining coil)
  - 1 anti-condensation heater. Please specify auxiliary supply voltage: 110, 115 or 220 V
  - Silicon rubber insulator (light gray)

**For the CC type**, specify items 1 to 8, 13 and 14. If a line trap is to be mounted on the CCV or CC, please specify the weight and overall dimensions.



## Available Versions

### Dimensions CCV (in., lbs.)

| TYPE    | INSULATOR | TANK | A      | T.WEIGHT |
|---------|-----------|------|--------|----------|
| CCV 69  | 12        | Z    | 56.30  | 485      |
|         | 15        | A    | 58.70  | 641      |
|         | 15        | B    | 60.51  | 897      |
| CCV 115 | 12        | Z    | 72.05  | 553      |
|         | 15        | A    | 74.45  | 719      |
|         | 15        | B    | 76.26  | 974      |
| CCV 138 | 12        | Z    | 77.95  | 580      |
|         | 15        | A    | 80.35  | 747      |
|         | 15        | B    | 82.17  | 1003     |
| CCV 161 | 12        | Z    | 85.83  | 613      |
|         | 15        | A    | 88.23  | 787      |
|         | 15        | B    | 90.04  | 1043     |
| CCV 230 | 12        | Z    | 109.40 | 719      |
|         | 15        | A    | 112.4  | 906      |
|         | 15        | B    | 115.2  | 1162     |
|         | 20        | B    | 118.0  | 1398     |
| CCV 362 | 15        | A    | 137.60 | 1116     |
|         | 15        | B    | 159.40 | 1371     |
|         | 20        | B    | 173.60 | 1795     |
| CCV 550 | 15        | A    | 191.05 | 1272     |
|         | 15        | B    | 193.30 | 1528     |
|         | 20        | B    | 193.30 | 1973     |
| CCV 800 | 20        | B    | -      | -        |

\*Note: Special design on request. Indicatives values only - All indicated dimensions must be confirmed with order.

### Dimensions for CCV and CC (in)

|            | B    | C    | D x D       |
|------------|------|------|-------------|
| CCV Tank Z | 17.9 | 22.2 | 15.7 × 15.7 |
| CCV Tank A | 21.8 | 24.4 | 17.7 × 17.7 |
| CCV Tank B | 24   | 26.6 | 19.7 × 19.7 |
| CC Base    | 21.3 | 21.3 | 19.7 × 19.7 |


### Dimensions According to Insulator Type (in)

|            |      |      |      |
|------------|------|------|------|
| Insulator  | 12   | 15   | 20   |
| φ ext max. | 13.8 | 15.7 | 17.7 |

### Dimensions CC (in., lbs.)

| TYPE   | INSULATOR | L1  | T.WEIGHT |
|--------|-----------|-----|----------|
| CC 69  | 15        | 52  | 304      |
| CC 115 | 15        | 67  | 381      |
| CC 138 | 15        | 73  | 410      |
| CC 161 | 15        | 81  | 450      |
| CC 230 | 15        | 106 | 569      |
| CC 362 | 15        | 151 | 778      |
| CC 550 | 15        | 184 | 935      |
| CC 800 | 20        | 280 | 2200     |

Indicatives values only - All indicated dimensions must be confirmed with order.

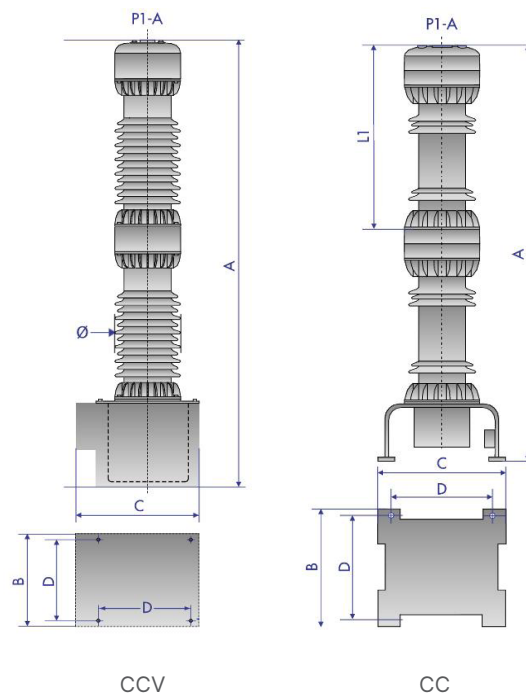

CCV

CC

For more information, visit  
[gevernova.com/grid-solutions](https://gevernova.com/grid-solutions)

IEC is a registered trademark of Commission Electrotechnique Internationale. IEEE is a registered trademark of the Institute of Electrical Electronics Engineers, Inc.

GE Vernova Vernova reserves the right to make changes to specifications of products described at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-155921-(E)  
 English  
 250903