

# MODEL 3P3

## Current Transformer

Window Diameter 0.97"



REGULATORY AGENCY APPROVALS  
 E93779  LR89403  
 Manufactured to meet the requirements of ANSI/IEEE C57.13.  
 Classified by U.L. in accordance with IEC 44-1

### Application

3 phase metering and other switchboard applications and for current to voltage conversion by use of a loading resistor as illustrated in the graph below and having low primary current input.

### Frequency

50-400 Hz.

### Insulation Level

600 Volts, 10 kV BIL full wave.

### Continuous Thermal Current Rating Factor

Models 3P3-500 - 3P3-301:

1.33 at 30°C ambient.

1.0 at 55°C ambient.

Models 3P3-1000T:

450 A at 30°C amb., 300 A at 55°C amb.,

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Transformers can be ordered with secondary leads configured in various ways (consult factory).

Load resistors may be mounted directly on terminals thus providing a "space saver" feature.

Approximate weight 1.75 lbs.

### Data Table Model 3P3


CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA 60 Hz
3P3-500	50:5	±3%	2.0
3P3-600	60:5	±2%	2.0
3P3-750	75:5	±2%	2.0
3P3-800	80:5	±2%	2.0
3P3-101	100:5	±1%	2.0
3P3-121	120:5	±1%	2.0
3P3-1250	125:5	±1%	2.5
3P3-151	150:5	±1%	2.5
3P3-201	200:5	±1%	5.0
3P3-251	250:5	±1%	7.5
3P3-301	300:5	±1%	10.0
3P3-1000T		See Performance Graph	




GE VERNOVA



Model 3P3

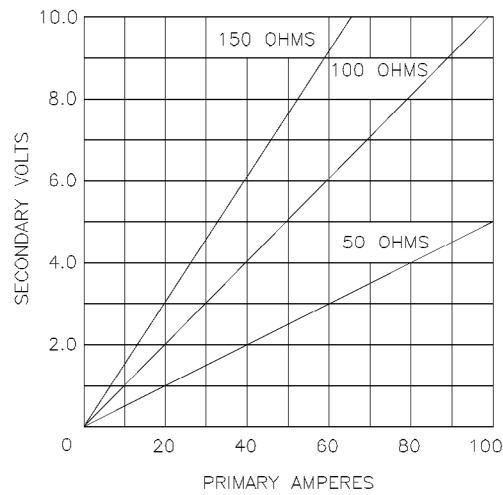

The graph illustrates voltage output capacity, and over the ranges shown, will maintain  $\pm 3\%$  linearity.

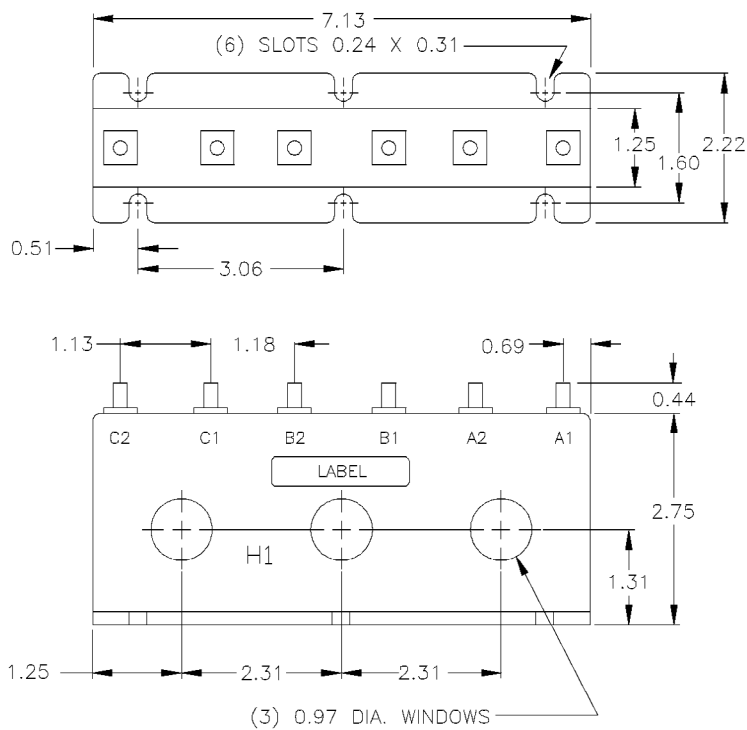

For more information, visit [gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50572  
English  
251015