


# MODEL 76

## Current Transformer

Window Diameter 3.00"

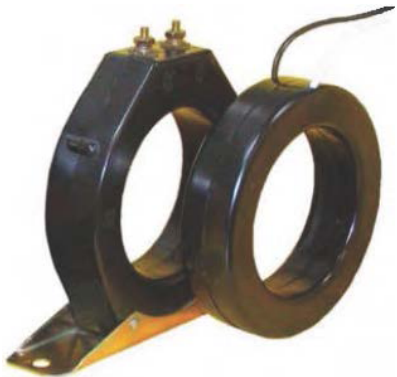

Models 76RBT and 76RL Shown



### Application

With ammeters, wattmeters, and cross current compensation.

### Frequency

50-400 Hz

### Insulation Level

600 Volt, 10 kV BIL full wave.

Flexible leads are UL 1015, 105°C, CSA approved, #16 AWG, 24" long.

Non-standard, lead length can be specified.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

SFT case styles also available as SFL with leads.

Approximate weight 1.5 lbs.


Data Table: Model 76

CATALOG NUMBER	CURRENT RATIO	ACCURACY AT 60 Hz	BURDEN VA AT 60 Hz
76**-201	200:5	±1%	5.0
76**-251	250:5	±1%	5.0
76**-301	300:5	±1%	6.0
76**-401	400:5	±1%	10.0
76**-501	500:5	±1%	10.0
76**-601	600:5	±1%	10.0
76**-751	750:5	±1%	10.0
76**-801	800:5	±1%	12.5
76**-102	1000:5	±1%	10.0
76**-122	1200:5	±1%	10.0
76**-152	1500:5	±1%	12.5
76**-162	1600:5	±1%	12.5
76**-202	2000:5	±1%	15.5


\*\* Note: When ordering, prefix Cat No. with model designation required i.e. 76RL-201, 76RBL-251, etc.

## Model 76


Model 76SFT

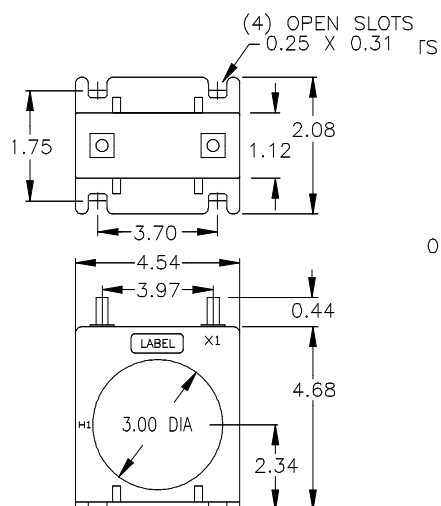


Model 76RT

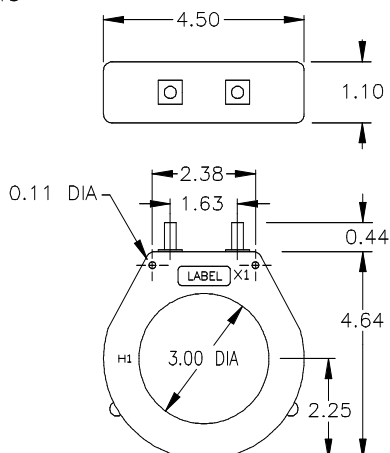


Model 76RBT

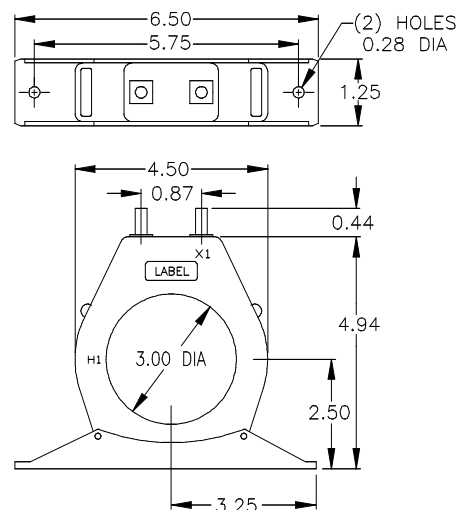

Model 76RL

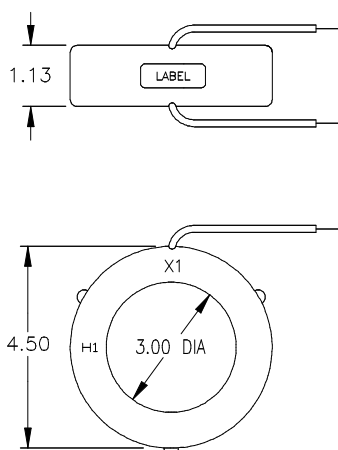

Model 76RBL

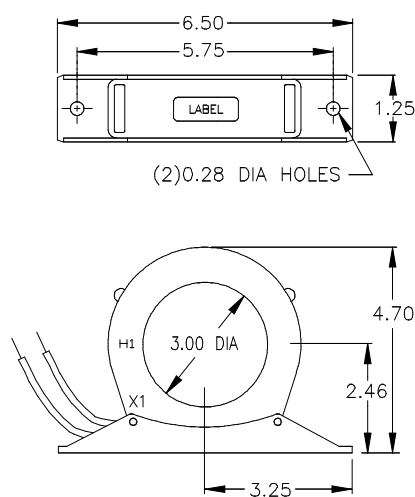

For more information, visit  
[gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50288  
English  
251015