

MODELS A & B

Current Transformers

Window Diameter 1.05", 2.06"

Application

For energy management systems and instrumentation.

Frequency

50-400 Hz.


Insulation Level

0.6 kV, BIL 10 kV full wave.

Model A

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 Hz
A*-500	50:5	±3%	1.5
A*-600	60:5	±3%	2.0
A*-750	75:5	±2%	2.0
A*-800	80:5	±2%	2.0
A*-101	100:5	±1%	2.0
A*-121	120:5	±1%	2.5
A*-1250	125:5	±1%	2.5
A*-151	150:5	±1%	4.0
A*-201	200:5	±1%	4.0
A*-251	250:5	±1%	6.0
A*-301	300:5	±1%	8.0
A*-401	400:5	±1%	10.0

*Note Specify "F" for fast-ons or "T" for terminals or "L" for leads.

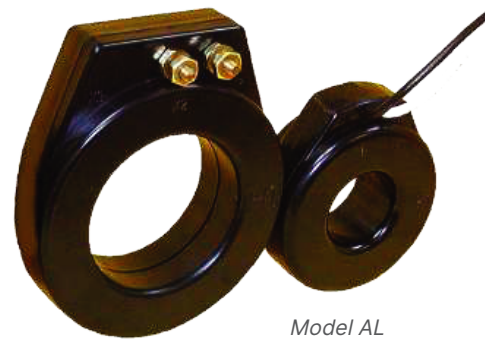

Model BT

Model AL



Rating Factor

1.0 at 30°C. amb.,

Fast on connectors are standard 1/4" Terminals are 8-32 studs.

Flexible leads are UL 1015, 105°C., CSA approved. #16 AWG, 2" long.

Approximate weights:

Model A - 0.5 lb.


Model B - 0.6 lb.

Model B

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 Hz
B*-500	50:5	±3%	0.5
B*-750	75:5	±1%	0.5
B*-101	100:5	±1%	1.0
B*-151	150:5	±1%	2.5
B*-201	200:5	±1%	4.0
B*-251	250:5	±1%	6.0
B*-301	300:5	±1%	7.5
B*-401	400:5	±1%	10.0
B*-501	500:5	±1%	12.5
B*-601	600:5	±1%	15.0
B*-751	750:5	±1%	7.0
B*-801	800:5	±1%	8.0
B*-102	1000:5	±1%	10.0
B*-122	1200:5	±1%	12.5

*Note Specify "F" for fast-ons or "T" for terminals or "L" for leads.

Model A , B

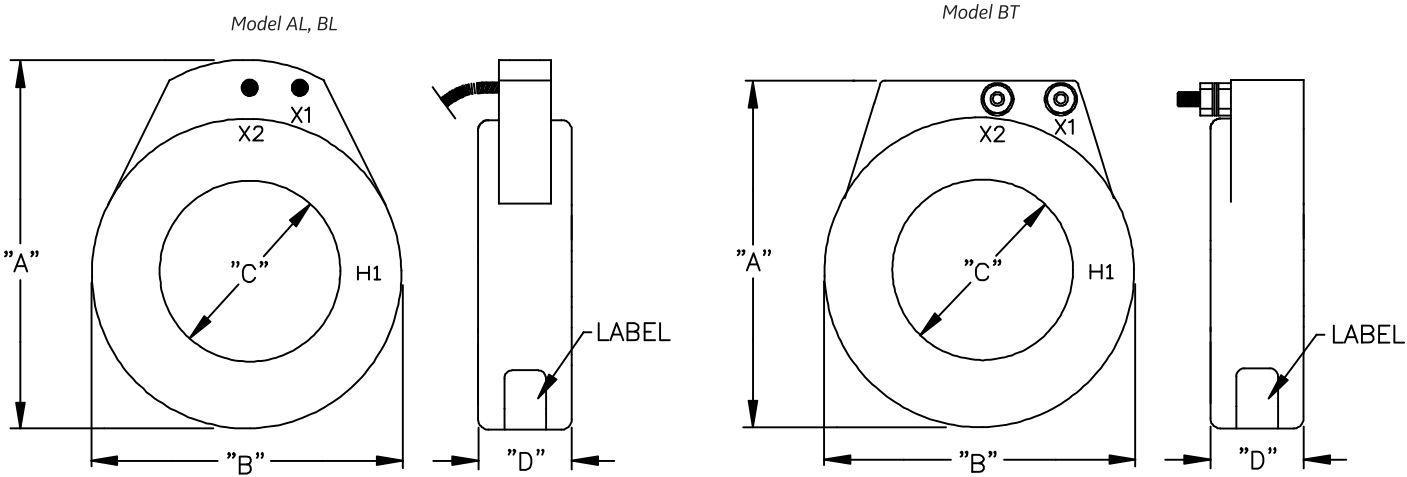

Model A B

MODEL AL	MODEL BL	MODEL BT
A: 2.74	A: 3.74	A: 3.88
B: 2.47 DIA	B: 3.43 DIA	B: 3.43 DIA
C: 1.05 DIA	C: 2.06 DIA	C: 2.06 DIA
D: 1.05	D: 1.10	D: 1.10

For more information, visit [gevernova.com/grid-solutions](https://www.gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50314
English
251015