

# MODEL JCT-OC 600 V

## Indoor Current Transformer

10 kV BIL  
With Integral Primary Bar



### Application

Designed for indoor service; suitable for operating meters and instruments, on both single-phase two-wire circuits and poly-phase circuits.

### Weight

(Approximate in pounds)

Transformer, without base .....	7.0 lbs
Low base, add .....	0.25 lbs
High (EEI) base, add .....	1.0 lbs

### Reference Drawings

Outline 200:5 and 400:5 .....	0121C33682
Outline 600:5 and 800:5 .....	0121C44158

### Insulation Level

0.6 kV; BIL 10 kV full wave.

### Frequency

50-60 Hz


## Model JCT-0C 600 V

CURRENT RATIO (Amps) Pri: Sec	ANSI ACCURACY CLASS, 60 Hz BURDEN PER ANSI			CONTINUOUS THERMAL CURRENT RATING FACTOR		CATALOG NUMBER	
	B0.1	B0.2	B0.5	@ 30 °C Amb.	@ 55 °C Amb.	WITH SECONDARY HARDWARE AND COVER	WITHOUT SECONDARY HARDWARE AND COVER
Without Base							
200:5	0.3	0.3	0.6	2.0	1.5	750X123202	750X123102
400:5	0.3	0.3	0.6	2.0	1.5	750X123204	750X123104
600:5	0.3	0.3	0.3	2.0	1.5	750X123206	750X123106
800:5	0.3	0.3	0.3	1.5	1.0	750X123208	750X123108
With Low Baswe							
200:5	0.3	0.3	0.6	2.0	1.5	750X123212	750X123212
400:5	0.3	0.3	0.6	2.0	1.5	750X123214	750X123214
600:5	0.3	0.3	0.3	2.0	1.5	750X123216	750X123216
800:5	0.3	0.3	0.3	1.5	1.0	750X123218	750X123218
With High (EEI) Base							
200:5	0.3	0.3	0.6	2.0	1.5	750X123222	750X123222
400:5	0.3	0.3	0.6	2.0	1.5	750X123224	750X123224
600:5	0.3	0.3	0.3	2.0	1.5	750X123226	750X123226
800:5	0.3	0.3	0.3	1.5	1.0	750X123228	750X123228

## Model JCT-0C

### Dimensions in inches

RATIO	BAR DIM "A"	BAR DIM "B"
200:5	1.50	0.20
400:5	2.00	0.25
600:5	2.25	0.28
800:5	2.25	0.28

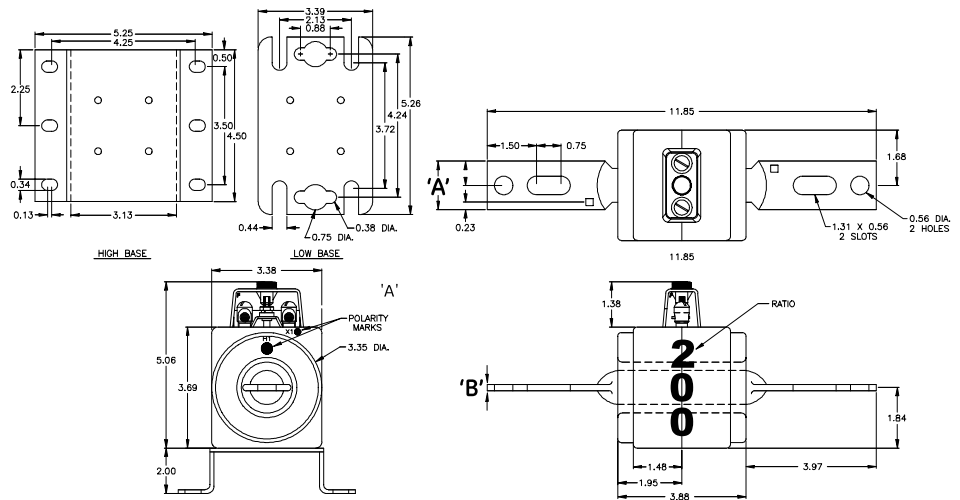

JCT-QC Dimensions in inches

### Construction and Insulation

The core and coil are enclosed in a case molded with GE Vernova Valox thermoplastic polyester resin. This tough material has excellent electrical and mechanical properties over a wide temperature range, has low water absorption and is resistant to oil and a variety of chemicals.

### Core and Coil

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire. The secondary windings are evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

### Terminals

Secondary terminals are tin plated brass, compression type with a 0.275" diameter cross-hole for wiring and a 1/4-28 clamp screw. A shorting device is provided and interlocked to the terminal cover. The terminal cover is made of a clear plastic. Provision is made for sealing the cover.

### Polarity

The H1 polarity mark is molded into the case, above the window at one end. The X1 polarity mark is also molded into the case adjacent to the secondary terminal. Both H1 and X1 are marked with white dots.

### Primary Bars

Formed from copper tube, they are tin-plated. They are nonremovable and have a potential connector that can be attached above or below the bar at either end. Primary bars conform to ANSI C12.11.

### Nameplates

The nameplate is laser engraved aluminum. It is attached to the side of the unit and has provision for attaching the user's identifying tag. The nominal current rating is marked on both sides of the unit in large numerals.

### Baseplate and Mounting

The transformer can be mounted in any position and may be suspended from the bus-bar or cable. It has provision for attaching two optional bases. Low bases are made from stainless steel. The high base increases the transformer height by 2 inches and meets the dimensions specified in ANSI C12.11.

### Maintenance

These transformers require no maintenance, other than occasional cleaning, if installed where air contamination is severe.

For more information, visit  
**[gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)**

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



**GE VERNOVA**

GEA-N50359  
English  
250926