

# MODEL 387MR

## Current Transformer with Multi-Ratio

Window Diameter 4.50"



### Application

Relaying.

### Frequency

50-400 Hz.

### Insulation Level



600 Volt, 10 kV BIL full wave.

Terminals are brass screws with one flatwasher and lockwasher.




Approximate weight 70 lbs.

### Model 387MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
387-601MR	C200	2.0	2.0
387-122MR	C400	2.0	1.5
387-202MR	C400	1.5	1.33

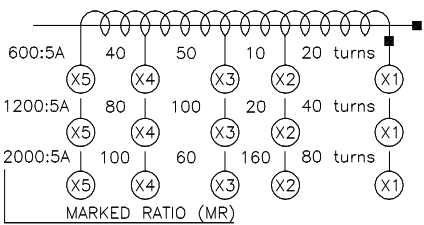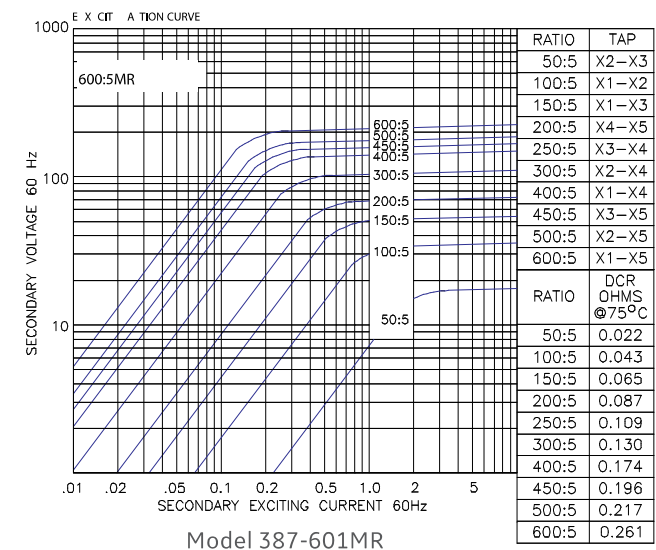

Model 387MR

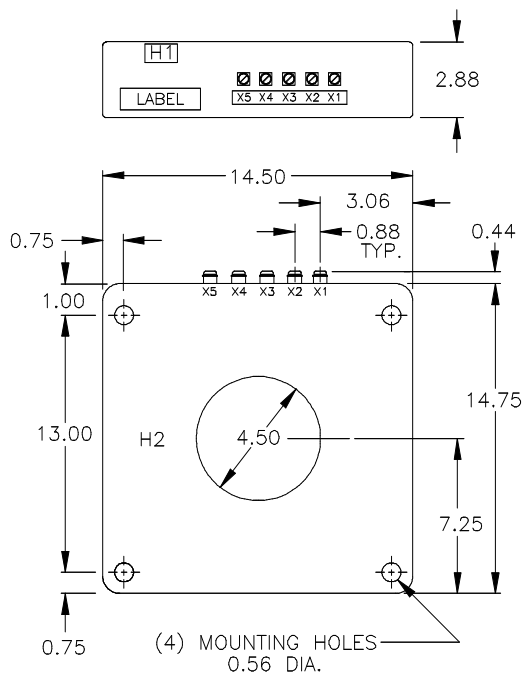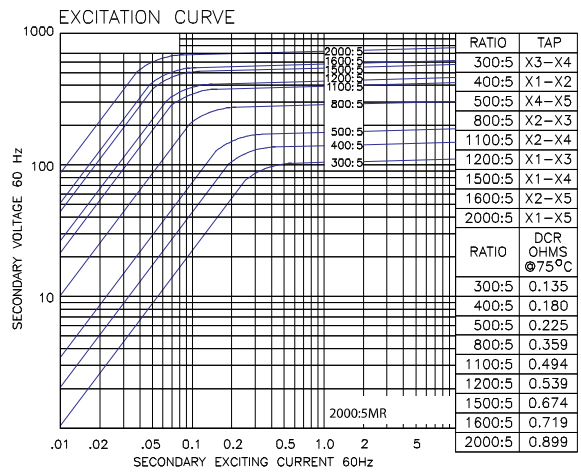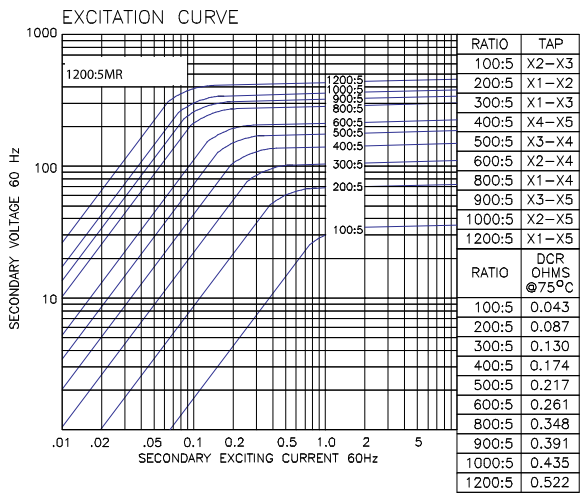

For more information, visit [gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.

