

MODEL 388

Current Transformer

Window Diameter 5.75"



Application

Relaying and metering.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Multi-ratios available on request.

Approximate weight 35 lbs.

Model 388



CATALOG NUMBER	CURRENT RATIO	RELAY CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (Ω @ 75°C)	CONTINUOUS THERMAL RATING FACTOR	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
388-201	200:5	C20	0.6	0.6	1.2	2.4	4.8	0.061	2.0	2.0
388-251	250:5	C20	0.3	0.6	1.2	2.4	2.4	0.077	2.0	2.0
388-301	300:5	C50	0.3	0.3	0.6	1.2	2.4	0.092	2.0	2.0
388-401	400:5	C50	0.3	0.3	0.3	0.6	1.2	0.123	2.0	2.0
388-501	500:5	C50	0.3	0.3	0.3	0.6	0.6	0.153	2.0	2.0
388-601	600:5	C100	0.3	0.3	0.3	0.3	0.6	0.184	2.0	2.0
388-751	750:5	C100	0.3	0.3	0.3	0.3	0.3	0.230	2.0	2.0
388-801	800:5	C100	0.3	0.3	0.3	0.3	0.3	0.245	2.0	2.0
388-102	1,000:5	C100	0.3	0.3	0.3	0.3	0.3	0.307	2.0	1.5
388-122	1,200:5	C200	0.3	0.3	0.3	0.3	0.3	0.368	2.0	1.5
388-152	1,500:5	C200	0.3	0.3	0.3	0.3	0.3	0.502	2.0	1.5
388-162	1,600:5	C200	0.3	0.3	0.3	0.3	0.3	0.535	2.0	1.5
388-202	2,000:5	C200	0.3	0.3	0.3	0.3	0.3	0.669	1.5	1.33
388-252	2,500:5	C400	0.3	0.3	0.3	0.3	0.3	0.836	1.5	1.0
388-302	3,000:5	C400	0.3	0.3	0.3	0.3	0.3	0.933	1.5	1.0
388-322	3,200:5	C400	0.3	0.3	0.3	0.3	0.3	0.995	1.5	1.0
388-352	3,500:5	C400	0.3	0.3	0.3	0.3	0.3	1.083	1.5	1.0
388-402	4,000:5	C400	0.3	0.3	0.3	0.3	0.3	1.244	1.33	1.0



GE VERNOVA



Model 388

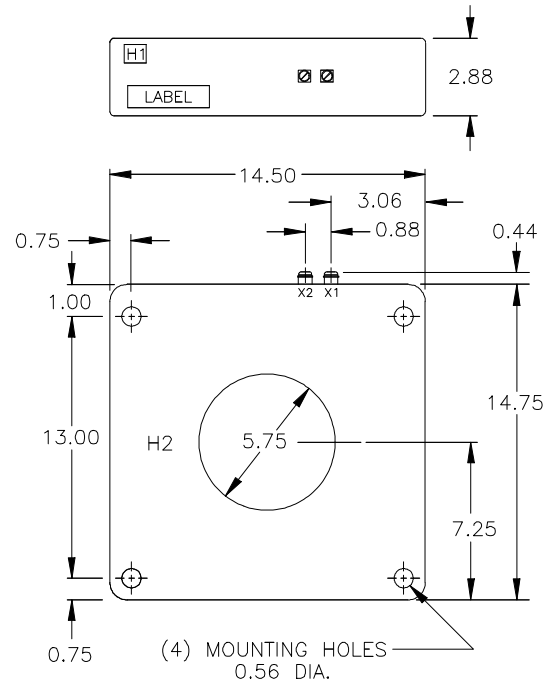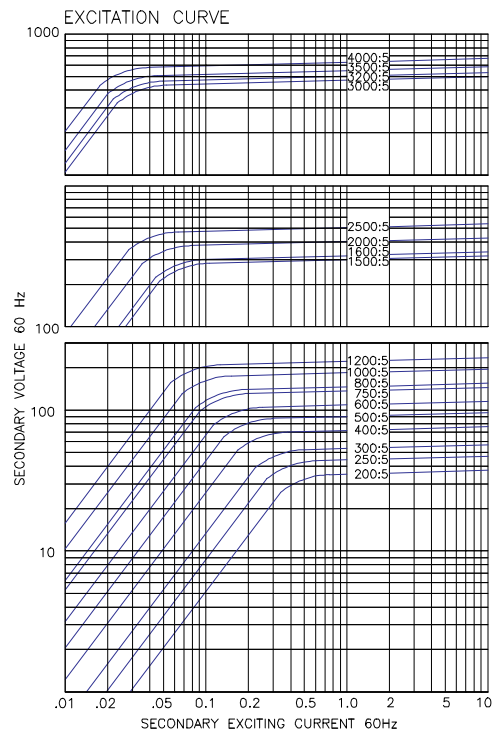

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50716
 English
 251009