

# MODEL 388MR

## Current Transformer Multi-Ratio

Window Diameter 5.75"

### Application


Relaying.

### Frequency

50-400 Hz.

### Model 388MR

CATALOG NUMBER	RELAY CLASS	CONTINUOUS THERMAL RATING FACTOR	
		@ 30°C	@ 55°C
388-601MR	C100	2.0	2.0
388-122MR	C200	2.0	1.5
388-202MR	C200	1.5	1.33
388-302MR	C400	1.5	1.0
388-402MR	C400	1.33	1.0

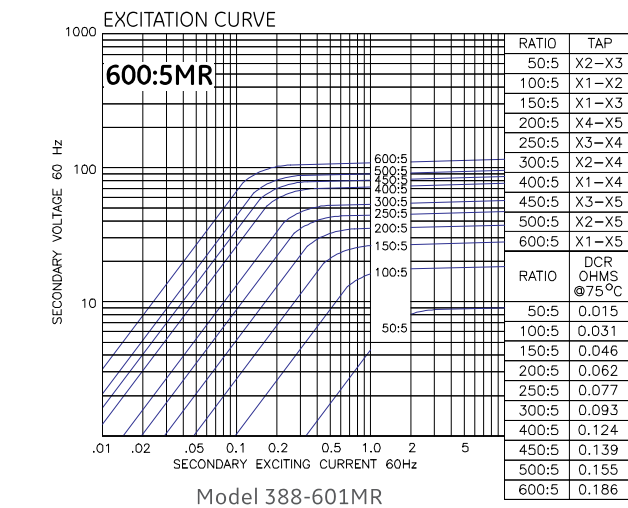


### Insulation Level






600 Volt, 10 kV BIL full wave.

Terminals are brass screws No. 10-32 with one flatwasher and lockwasher.

Approximate weight 35 lbs.

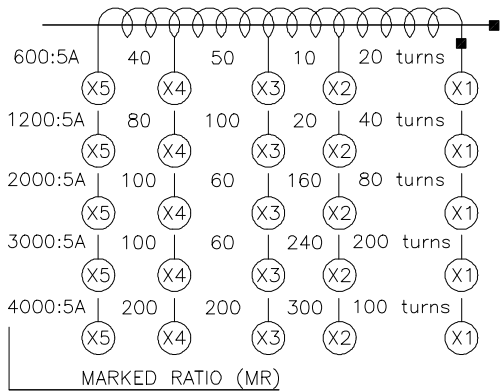

Model 388MR

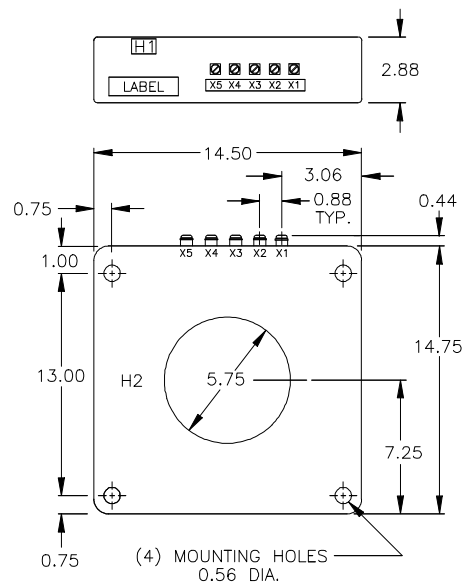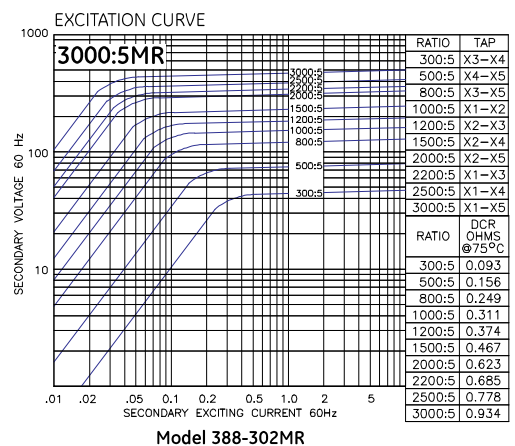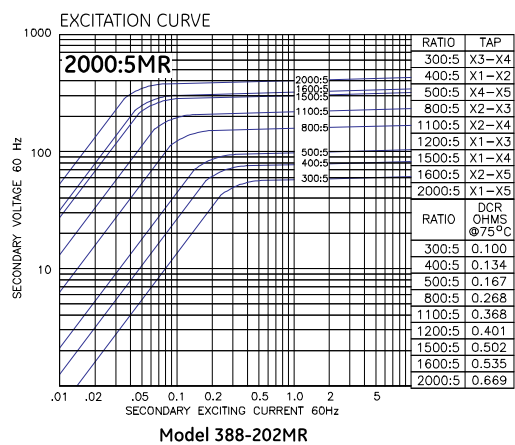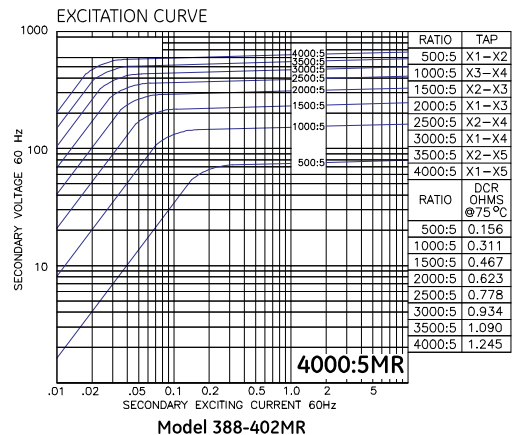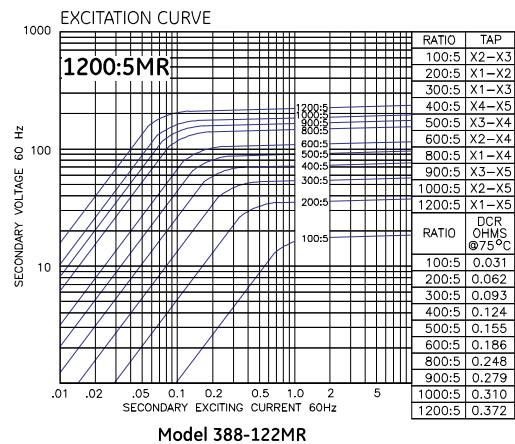

For more information, visit  
[gevernova.com/grid-solutions](http://gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GEA-N50781  
English  
251009