

MODEL 3P41

Current Transformer

Window Diameter 2.03"



(For Horizontal Mounting)



Application

3 phase relay, metering and motor overload protection.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.



Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Approximate weight 12 lbs.

Data Table: Model 3P41

CATALOG NUMBER	CURRENT RATIO	V.A. ±1% CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (Ω @ 75 °C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
3P41-101	100:5	–	1.2	1.2	2.4	–	–	0.030
3P41-151	150:5	–	0.6	0.6	1.2	2.4	–	0.045
3P41-201	200:5	–	0.3	0.6	1.2	2.4	2.4	0.075
3P41-251	250:5	C10	0.3	0.3	0.6	1.2	2.4	0.094
3P41-301	300:5	C10	0.3	0.3	0.3	0.6	1.2	0.090
3P41-401	400:5	C10	0.3	0.3	0.3	0.3	0.6	0.151
3P41-501	500:5	C20	0.3	0.3	0.3	0.3	0.6	0.149
3P41-601	600:5	C20	0.3	0.3	0.3	0.3	0.6	0.179

Model 3P41

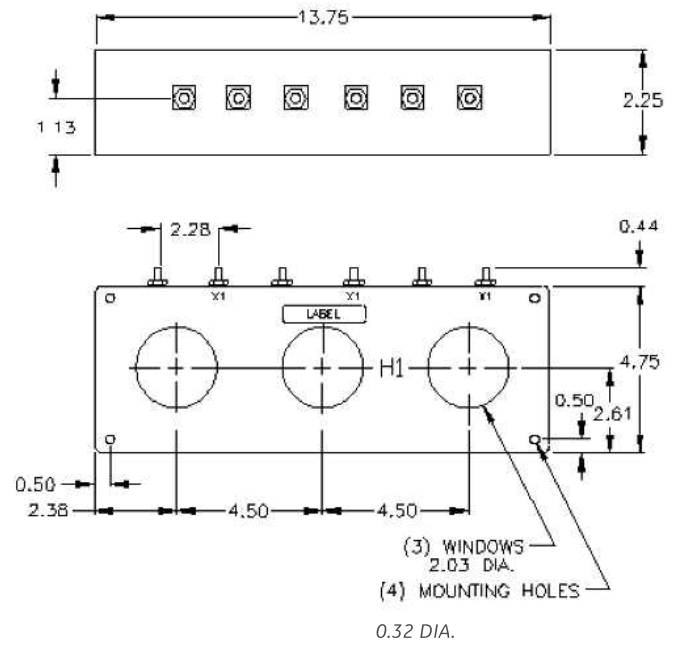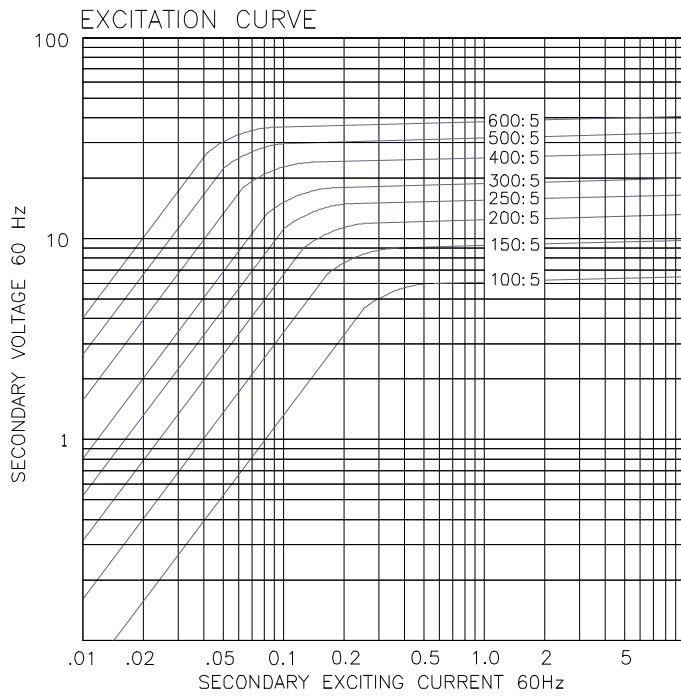

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.