

# MODELS 595 & 596

## Zero Sequence Current Transformers

Window Sizes  
4.56"x 13.44", 4.56"x 17.63"



Cast Resin Construction

### Application

Zero-Sequence

### Frequency

50-400 Hz.

### Insulation Level

600 Volts, 10 kV BIL full wave.

### Continuous Thermal Current Rating Factor

2.0 at 30 °C. amb.,

2.0 at 55 °C. amb.

Terminals are brass screws No. 8-32 with lockwashers.




4 holes mounting system also available with brackets. Consult factory for details.

Approximate weight 24-29 lbs.

### Models 595 & 596

CATALOG NUMBER	CURRENT RATIO	SECONDARY WINDING RESISTANCE (Ω @ 75°C)
595—102—1	1,000:1	7.52
596—102—1	1,000:1	7.52

## Model 595 & 596 Cast Resin Construction

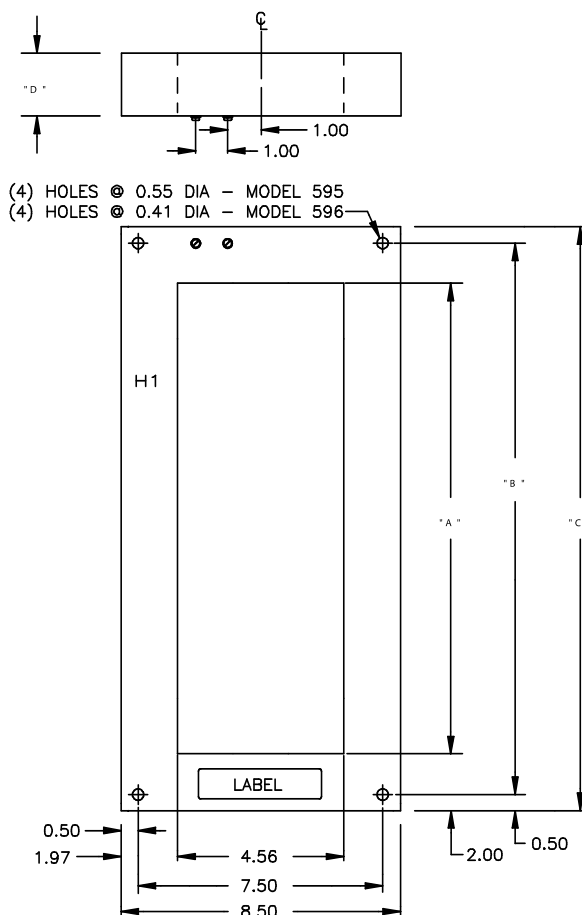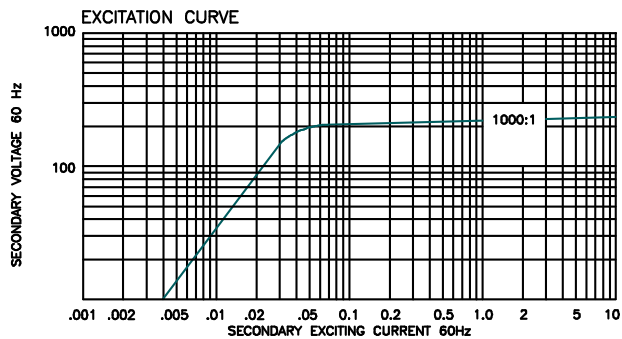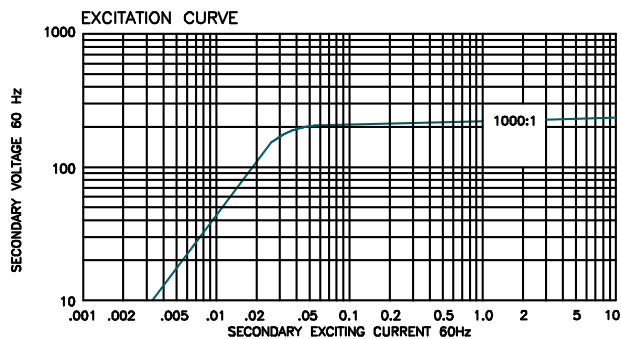

## Models 595 & 596

MODEL	"A"	"B"	"C"	"D"
595	13.44	16.50	17.50	2.00
596	17.63	20.63	21.63	2.13

For more information, visit  
[gevernova.com/grid-solutions](https://www.gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50772  
 English  
 251010