


MODEL 3P92

Current Transformer

Window Size 2.56" x 2.12"

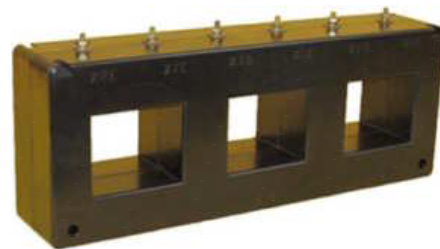

REGULATORY AGENCY APPROVALS



E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Application

3 phase relay, metering and motor overload protection.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

Flexible leads U. L. 1015, 105 °C., CSA approved, No. 16 AWG, 24" long available.

Approximate weight 7 lbs.

Data Table: Model 3P91

CATALOG NUMBER	CURRENT RATIO	V.A. ±1% CLASS	ANSI METERING CLASS AT 60 Hz					SECONDARY WINDING RESISTANCE (Ω @ 75°C)
			B0.1	B0.2	B0.5	B0.9	B1.8	
3P92-101	100:5	2.5	2.4	2.4	4.8	—	—	0.012
3P92-151	150:5	5	1.2	1.2	2.4	—	—	0.023
3P92-201	200:5	5	0.6	0.6	2.4	4.8	—	0.036
3P92-251	250:5	7.5	0.6	0.6	1.2	2.4	—	0.045
3P92-301	300:5	10	0.6	0.6	1.2	2.4	—	0.054
3P92-401	400:5	15	0.3	0.3	0.6	1.2	2.4	0.076
3P92-501	500:5	20	0.3	0.3	0.6	0.6	1.2	0.095
3P92-601	600:5	25	0.3	0.3	0.6	0.6	1.2	0.150
3P92-751	750:5	25	0.3	0.3	0.3	0.6	1.2	0.187
3P92-801	800:5	35	0.3	0.3	0.3	0.6	0.6	0.200
3P92-102	1,000:5	30	0.3	0.3	0.3	0.6	0.6	0.177
3P92-122	1,200:5	35	0.3	0.3	0.3	0.6	0.6	0.213
3P92-152	1,500:5	45	0.3	0.3	0.3	0.3	0.6	0.266
3P92-162	1,600:5	50	0.3	0.3	0.3	0.3	0.6	0.284
3P92-202	2,000:5	60	0.3	0.3	0.3	0.3	0.6	0.441
3P92-252	2,500:5	75	0.3	0.3	0.3	0.3	0.3	0.683



Note: Captive slots on top of transformer case can be used for attaching auxiliary device mounting plate, (not supplied).
If the application requires transformer mounted relays, etc., then transformers can be ordered with secondary leads configured in various ways (consult factory).



GE VERNOVA



Model 3P92

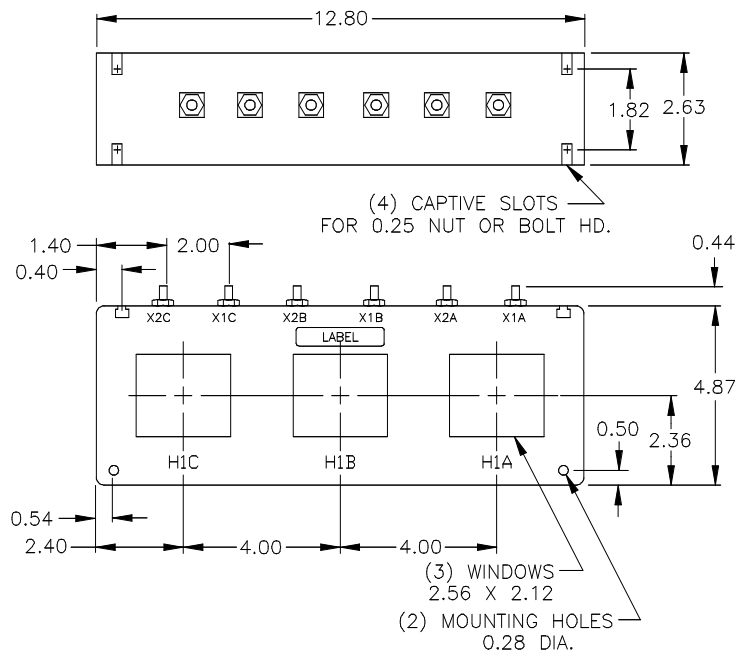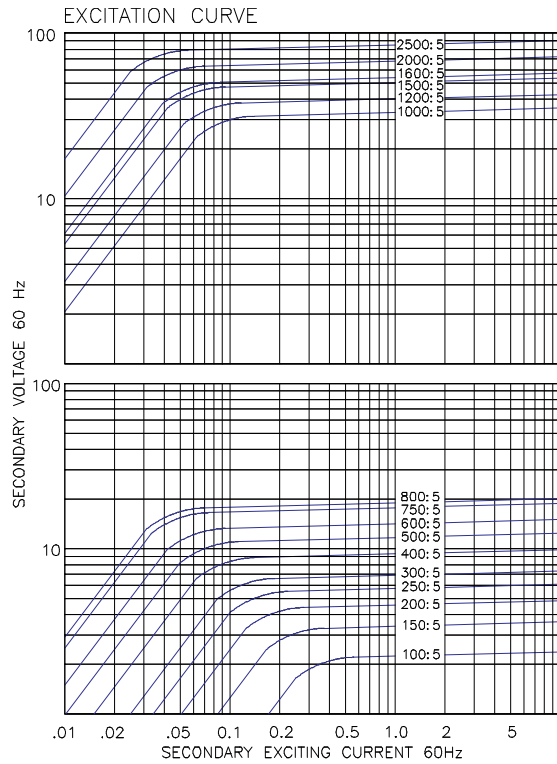

For more information, visit
gevernova.com/grid-solutions

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50506
 English
 250930