


MODEL 5DARL

Current Transformer

Window Diameter 1.56"

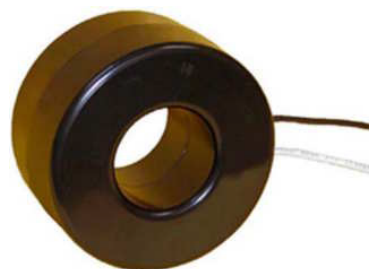

Application

Ammeters, wattmeters and cross current compensation.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Flexible leads are UL 1015, 105 °C, CSA approved, #16 AWG, 24" long. Non-standard, lead length can be specified.

Approximate weight 2 lbs.

Model 5DARL

CATALOG NUMBER	CURRENT RATIO	V.A. ±1% CLASS	ANSI METERING CLASS AT 60 Hz					Secondary Winding Resistance (Ω @ 75 °C)	Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8		@ 30°C	@ 55°C
5DARL-500	50:5	± 2% 2.5	2.4	-	-	-	-	0.010	2.0	2.0
5DARL-600	60:5	2.5	1.2	4.8	-	-	-	0.014	2.0	2.0
5DARL-750	75:5	3.5	1.2	2.4	-	-	-	0.018	2.0	2.0
5DARL-800	80:5	4.0	1.2	2.4	4.8	-	-	0.021	2.0	2.0
5DARL-101	100:5	5.0	0.6	1.2	4.8	4.8	-	0.029	2.0	2.0
5DARL-121	120:5	7.5	0.6	0.6	2.4	4.8	-	0.035	2.0	2.0
5DARL-1250	125:5	7.5	0.6	0.6	2.4	4.8	4.8	0.036	2.0	2.0
5DARL-151	150:5	10.0	0.6	0.6	1.2	4.8	4.8	0.042	2.0	2.0
5DARL-201	200:5	12.5	0.6	0.6	0.6	2.4	2.4	0.058	2.0	1.5
5DARL-251*	250:5	20.0	0.3	0.3	0.6	1.2	2.4	0.078	2.0	1.5
5DARL-301	300:5	25.0	0.3	0.3	0.6	1.2	1.2	0.084	1.5	1.33
5DARL-401	400:5	40.0	0.3	0.3	0.3	0.3	1.2	0.111	1.5	1.0
5DARL-501*	500:5	50.0	0.3	0.3	0.3	0.3	0.6	0.175	1.5	1.0
5DARL-601	600:5	60.0	0.3	0.3	0.3	0.3	0.6	0.152	1.0	0.8
5DARL-751	750:5	75.0	0.3	0.3	0.3	0.3	0.6	0.190	1.33	1.0
5DARL-801	800:5	80.0	0.3	0.3	0.3	0.3	0.3	0.202	1.33	1.0
5DARL-102*	1000:5	90.0	0.3	0.3	0.3	0.3	0.3	0.316	1.0	0.8



*Measurement Canada Approved AE-1180



GE VERNOVA



Model 5DARL

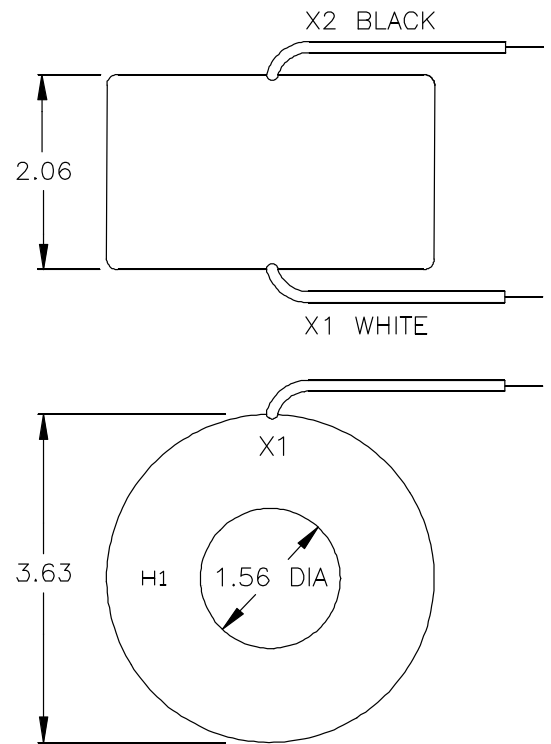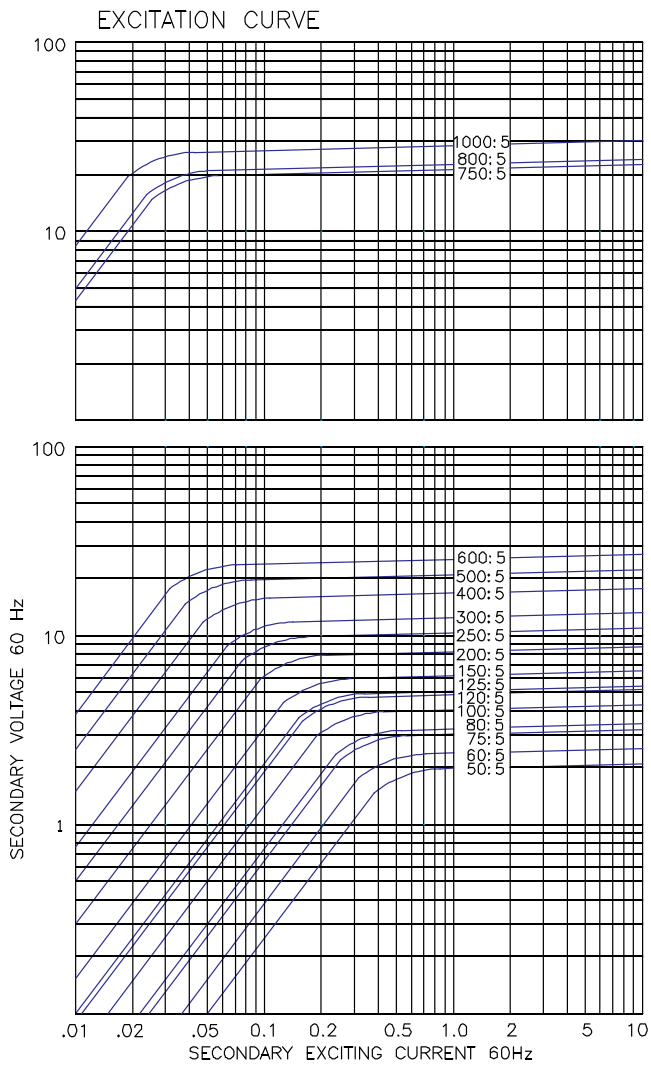

For more information, visit
[gevernova.com/grid-solutions](https://www.gevernova.com/grid-solutions)

Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

© 2025 GE Vernova and/or its affiliates. All rights reserved. GE and the GE Monogram are trademarks of General Electric Company used under trademark license.



GE VERNOVA

GEA-N50631
 English
 250924